

Dear Dr. Minhan Dai,

thank you for your decision and comments and for allowing us to submit a revised version of our manuscript. We greatly appreciate the detailed and constructive comments of the two reviewers which helped us to improve the manuscript. Overall, we addressed all comments of the reviewers and hope that we adequately solved the requests.

With kind regards

Wolfram Eschenbach

(We attached a version of the manuscript and the supplement with changes highlighted at the end of this pdf.)

Interactive comment on “Predicting the denitrification capacity of sandy aquifers from in situ measurements using push-pull ^{15}N tracer tests” by W. Eschenbach and R. Well

Anonymous Referee #2

Received and published: 6 January 2015

General comments

This paper makes a valuable contribution to groundwater denitrification research, particularly by linking the results of in situ push-pull ^{15}N tracer tests to laboratory-derived denitrification rates and to measured stocks of reduced compounds. Applying push-pull ^{15}N tracer tests in varying hydrochemical settings also provided useful information on the limitations of such short-term tests. While the research was restricted to two sandy aquifers within the same region, the results will be of great interest to the international science community.

Specific comments

Please consider reformulating the following sentences or paragraphs to clarify their meaning:

1. 16529-18 to 22: Logic of ‘not only..’ and ‘Since’ not clear.

We changed the following sentence from:

“Not only the questions how rates of denitrification will respond to Nr loading (Seitzinger et al., 2006) and where and how long denitrification in aquifers can remediate NO_3^- pollution (Kölle et al., 1985) are of importance.”

to:

“This problem not only depends on how rates of denitrification will respond to Nr loading (Seitzinger et al., 2006) but also on where and how long denitrification in aquifers can remediate NO_3^- pollution (Kölle et al., 1985).”

the corresponding section now reads:

“This leads to the question of how individual aquifers will respond to the anthropogenic NO_3^- pollution in groundwater. This problem not only depends on how rates of denitrification will respond to Nr loading (Seitzinger et al., 2006) but also on where and how long denitrification in aquifers can remediate NO_3^- pollution (Kölle et al., 1985). Continuous NO_3^- input via seepage water leads to ongoing exhaustion of the reductive capacity of aquifers.”

2. 16532-6 to 9: Presumably referring to the so far insufficiently considered effect of ambient redox conditions on the outcome of push-pull tests, but unclear.

(see also referee 1 comment 3 (technical corrections))

We changed the respective sentence from:

„At all the possible **influence** of the location of push-pull tests within aquifers regarding the presence or absence of NO_3^- on measured in situ denitrification rates in ground water has not been addressed so far.“

to:

“So far, the effect of different ambient redox conditions, i.e. the presence or absence of NO_3^- in groundwater, on the outcome of push-pull tests, has been insufficiently considered.

Hopefully this clarifies the meaning of this sentence.

3. 16549-13 to 18: This paragraph on temporal (in addition to spatial) variation appears somewhat isolated in this section, as you do not explicitly refer to its relevance for your study. See comment on ‘steepest increase’ below and Figure 2. It also should be noted that temporal

variability may have had an effect on the comparison between push-pull test without and with preconditioning (16550 and Fig. 4).

We moved this paragraph to the next section (Sect. 4.1.2). We also renamed this section (see your next comment). The paragraph was also changed to:

“In addition to possible systematic differences between different methods with respect to the derived denitrification rates, it has to take into account that D_r (in situ) can show a considerable temporal variability during push-pull tests itself. This was evident during the 12 day long pull-phase of a push-pull test conducted by Trudell et al. (1986) in the O_2 and NO_3^- -free groundwater zone of a shallow sandy aquifer in south western Ontario Canada, where D_r (in situ) increased from 30.3 to 504.6 $\mu g N kg^{-1} d^{-1}$ (Trudell et al., 1986).

Comparable to the...”

4. 16549/50 Section 4.1.2: The headline does not appear to describe the four main issues discussed in this paragraph adequately (pushpull nitrate-free zone, pre-conditioning, difference between in situ and lab results, in situ vs. lab ratios). Maybe start with push-pull results from nitrate-bearing vs. nitrate-free zone and develop line of argument from there?

We completely reworked this section, as suggested (see the manuscript Sect. 4.1.2). The headline is now: **“Temporal and spatial variability of in situ denitrification rates”**

5. 16555-25 to 16556-2: The meaning of this sentence is not clear to me. Please reformulate.

We reformulated this sentence to: “This was done by comparison of D_r (in situ) with denitrification parameters determined in aquifer material samples, i.e. the stock of reduced compounds (SRC) and the cumulative denitrification measured during one year of incubation in the laboratory ($D_{cum}(365)$).”

6. 16556-6 to 8: You correctly refer here to nitrate-bearing aquifer zones. Equally, I suggest to repeat here that the push-pull technique (without pre-conditioning) not suited to conditions where the groundwater is nitrate-free.

To make this section clearer, we added the following sentence:

“Our results also indicate that the push-pull technique (without pre-conditioning) is not suited to derive the SRC or $D_{cum}(365)$ of aquifer samples from in situ denitrification rates under conditions where the groundwater is nitrate-free.”

7. Table 1: Replace ‘depth position’ by ‘depth’ or ‘location’. Clarify why one specific depth is given in some instances, but a range in others. Given that screen lengths varied widely between wells, I suggest the depth range should be given everywhere.

We changed as recommend “depth position” to “depth range”.

The table header is now: “Overview of the conducted push-pull ^{15}N tracer tests, the used wells and the depth range of the respective filter screens in both aquifers. Push-pull test with and without pre-conditioning were conducted at multilevel well B4.”

8. Table 2: As previous comment. ‘Injection depth’ information unclear.

We changed the information about the injection depth in accordance to the previous comment.

The Table header is now:

“Background conditions of the groundwater from the injection depths of the push-pull ^{15}N tracer tests.”

9. Figure 1: the schematic suggests that the injection depth (i.e. end of pipe) was at the top of the screen. If this is correct, have you considered the effect of the varying screen lengths (0.25 m for CMT system, 1 – 4 m for monitoring wells)?

If we understand your remark right than the schematic might be a little bit misleading. The injection depth is in fact an injection interval. We changed Figure 1 to make things clearer. Hopefully this settles your question.

10. Figure 2: I would recommend enlarging these four figures, particularly the bottom ones. The legend suggests that there should be a 'FFA ns' time course, but that does not appear to be the case. Please clarify. Also, the tZ symbol is somewhat difficult to recognise; please consider changing it.

We added the FFA ns time courses and also changed the tZ symbol, so that it is easier to recognise now. We also enlarged the bottom ones of the four pictures.

We changed also the tZ symbol in Figure 3 and 5 accordingly.

The manuscript would benefit from providing additional information on the following issues:

1. 16536-18: Please provide some information on the length of time required for the passive tracer solution injection at the various sites. Given the differences in screen dimensions, tracer volumes and aquifer properties, is it fair to assume that these times varied widely?

Yes the injection times varied widely. We have included in the mentioned paragraph the following sentence:

“For common wells injections took 30-45 min, for the CMT multilevel system 45-80 min and for the multilevel wells in the FFA 150-240 min.”

16541-9: What was the range of dilution factors encountered at the various sites?

To give the requested information, we added the following paragraph after 16541-9:

“The encountered dilution factors ranged from 1 to 20 and were below 5 in 18 push-pull tests. Only during 4 push-pull tests the dilution factors were between 5-10 and during 2 in the range of 10 to 20. The conventional wells (GKA) showed on average higher dilution factors compared with the CMT multilevel system and the multilevel wells in the FFA. Dilution factors were near 1 for most of the push-pull tests in the FFA, i.e. the injected tracer solution interfered little with the surrounding ambient groundwater.”

2. 16541-16: Please explain the rationale behind using the ‘time intervals with the steepest increase’? What is the effect of differing time intervals and differing reaction dynamics (e.g. nearly linear vs exponential) on this procedure?

To explain the rationale behind “using time interval with the steepest increase”, we added the following sentences (blue) to the manuscript:

3. Denitrification rates were calculated from the tangent of dilution corrected time courses of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ concentrations at time intervals with the steepest increase during the respective push-pull test (Sanchez-Perez et al., 2003; Istok et al., 2004). “

This method was used because we suppose that the section of the steepest increase of measured denitrification products during a push-pull test is the best approximation of the maximal denitrification rate possible in the aquifer at the very location of the respective push-pull test. The rationale behind this is: We suppose that the maximal possible denitrification rate measurable at a certain point in an aquifer is dependent on the amount of reduced compounds in the aquifer material capable of supporting denitrification. Also the measured denitrification rate during a push-pull test is dependent on the state of the microbial community in the aquifer material at the location of the conducted push-pull test. For example, if in situ denitrification rates are measured in the zone of NO_3^- free groundwater, microbes might need time to express the appropriate enzymes to start to denitrify after

injection of the NO_3^- containing tracer solution. Since it is unknown how long this adaption time might be, the highest measurable denitrification rate during a push-pull test should give an approximation for the maximal possible denitrification rate at the very point of the push-pull test (see also Sect.4.1.2 and 4.2).

4. 16542-9 ff: The reported CV values appear very low if they are indeed percentages. Please double-check that they are not fractions.

Thank you for pointing this out, the CV values are indeed fractions. We deleted the % symbols.

The sentences now read:

“The mean coefficient of variation (CV) of concentration measurements of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ ($\mu\text{g N l}^{-1}$) in 3 replicates per sampling event during all push-pull tests was 0.18. The conversion of concentration data from the unit ($\mu\text{g N l}^{-1}$) to ($\mu\text{g N kg}^{-1}$) increased the mean CV significantly to 0.49.”

5. 16544-9 ff: This section is somewhat confusing as the two different procedures to stratify the data and the relationship between the two are not well explained. Rather than referring to your earlier paper, please explicitly provide the missing information here (e.g. give the threshold you used to separate nitrate-bearing and nitrate-free groundwater). Moreover, replace ‘sub data sets’; maybe use ‘data subsets’ instead?

We changed “sub data sets” to “data subsets” throughout the whole manuscript.

We have revised the corresponding section 3.1 clearly:

“Push-pull tests were grouped into data subsets according to the redox state of groundwater and chemical properties of the aquifer material from the vicinity of the filter screens of groundwater monitoring wells used for the respective push-pull tests (aquifer material was collected during well construction) (see also Eschenbach and Well (2013) Sect. 3.1). These data subsets consist of data from from wells with filter screens in the NO_3^- -bearing and NO_3^- -free groundwater zone (NO_3^- -bearing and NO_3^- -free zone, respectively) and from wells in the zone of non-sulphidic, sulphidic, and transition zone aquifer material (Tables 1 and 2).

0.4 mg NO_3^- -N L^{-1} was the lowest measured NO_3^- concentration above the limit of detection of 0.2 mg NO_3^- -N L^{-1} in the various monitoring wells (Table 2). Therefore, 0.4 mg NO_3^- -N L^{-1} was the lowest NO_3^- concentration of groundwater to be considered nitrate bearing in this study. Sulphidic and non-sulphidic aquifer material was distinguished using the sulphate formation capacity (SFC ($\text{mg S kg}^{-1} \text{ yr}^{-1}$)) of incubated aquifer material from the vicinity of the respective filter screen of the used monitoring wells (Eschenbach and Well, 2013). Aquifer samples with a SFC $> 1 \text{ mg SO}_4^{2-}$ -S $\text{kg}^{-1} \text{ yr}^{-1}$ during incubation were assigned sulphidic and push-pull tests conducted at wells with filter screens in this zone were accordingly assigned to the sulphidic zone. The transition zone was defined as zone within the aquifer where aquifer material still contains sulphides, but groundwater still contained NO_3^- . It follows, that the NO_3^- -bearing groundwater zone comprises the zone of sulphidic aquifer material and the transition zone.”

6. 16556-9: This sentence is reinforcing the earlier comment that some information on variability of bromide recovery across the sites is required.

See our reply to comment 2 (Referee 2). We add the following paragraph to this section:

“Still, the correction for dilution of the injected tracer solution with ambient groundwater is necessary when using membrane inlet mass spectrometry in the field (see Sect. 2.6 and the Supplement).”

To the supplement we added, the following:

“But still the correction for dilution of the injected tracer solution with ambient groundwater is necessary (see Sect. 2.6). Possibly this can be achieved with an additional inert gas like helium (He), which might be added to the tracer solution by stripping it with He before injection. Helium can then be measured online with the mass spectrometer. Or dilution correction might be achieved by the use of a tracer solution with a different salinity compared to the ambient groundwater.”

7. 16555-11 to 14: The ‘transition zone’ is sulphidic but still contains nitrate, suggesting that denitrification may be active in situ. I suggest you could more explicitly link the experimental results, and the differences between the data subsets, to the redox processes that are likely to be active under ambient conditions in situ.

To link the results of the push-pull tests more explicitly to redox processes and the differences between the data subsets, we added the following to this paragraph:

“We suppose the reasons for this might be (i) that residual reduced compounds that could support denitrification were still present in the aquifer material, (ii) the O₂ concentrations in the ambient groundwater (Table 2) were far below the reported apparent threshold of < 40 - 60 μmol L⁻¹ (≈ 1.5 – 2.3 mg O₂ L⁻¹) for the onset of denitrification in aquifers (Green et al., 2008, 2010; McMahon et al., 2004; Tesoriero and Puckett, 2011) (see also Sect. 4.1 in Eschenbach and Well (2013)) and (iii) NO₃⁻ was present in the ambient groundwater of the transition zone. Therefore we expect that the microbial community was already adapted to NO₃⁻, i.e. ready to denitrify, and denitrification was not inhibited by dissolved O₂. Conversely, in the non-sulphidic zone higher O₂ concentrations might have inhibited denitrification and this might have been more limiting for D_r(in situ) than the limited content of reduced compounds. This might explain the poor fit between calculated and measured values (Table 5) in the non-sulphidic zone. In the NO₃⁻-free zone the groundwater was almost O₂ free and, in comparison to the other zones, the aquifer material had a larger stock of reduced compounds (Table S1 in the Supplement). But nonetheless the correlation coefficients between D_r(in situ) and D_{cum}(365) and D_r(in situ) and the SRC were very low and the developed regression functions...”

Technical corrections

Unfortunately, convoluted and imprecise language distracts from the high quality of the manuscript. It is recommended that the authors enlist the support of a native speaker to overcome this shortcoming.

In the following, please find a list of the most obvious typing or grammatical errors:

1. ‘were’ repeatedly needs to be replaced by ‘where’:

16530-21, [changed as suggested](#)

16547-24, [changed as suggested](#)

16554-27, [changed as suggested](#)

16556-8. [changed as suggested](#)

We have reviewed the entire text regarding this error again and additionally changed site 16556-4 „were“ to „where“

2. 16530-12: Please replace ‘surface near groundwater’ with a more appropriate term. Maybe ‘uppermost groundwater’ if you refer to the groundwater zone closest to the water table or ‘shallow groundwater’ or ‘near-surface groundwater’ if you are referring to groundwater near the ground surface (i.e. situations with shallow vadose zone). Equally in 16531-11.

We have replaced „surface near groundwater“ with „uppermost groundwater“ in 16530-12 and 16531-11 and checked the whole manuscript for this phrase.

3. 16531-2: Consider replacing ‘instrument’ with ‘technique’.

Changed as suggested

4. 16531-18: Consider replacing ‘microbial mediated reaction’ with ‘microbially mediated reaction’ or ‘reaction mediated by microbes’.

Changed to: „microbially mediated reaction“

5. 16533-6: Consider replacing ‘new available electron donor’ with ‘newly available electron acceptor’.

Changed as suggested

6. 16533-7: Replace (vi) with (iv).

Changed as suggested

7. 16533-18: Consider replacing ‘microbial available sulphides’ with ‘microbially available sulphides’ or ‘sulphides available to microbes’.

We changed it to: “microbially available sulphides”

8. 16533-18: Replace ‘Intense’ with ‘Intensive’.

Changed as suggested

9. 16534-7: Replace ‘as’ with ‘than’.

Changed as suggested

10. 16534-20: Replace ‘Soilinst’ with ‘Solinst’.

Changed as suggested

11. 16535-9: Replace ‘4’ with ‘Four’.

Changed as suggested

12. 16536-27: Replace ‘form’ with ‘from’.

Changed as suggested

13. 16537-14: Consider replacing ‘soil surface’ with ‘ground surface’.

We have replaced „soil surface“ with „ground surface“ in the whole manuscript.

14. 16540-17 and 16540-20: Replace ‘Ba²⁺’ with ‘Ba²⁺’.

Changed as suggested

15. 16540-18: Replace ‘BaSO₄²⁻’, with ‘BaSO₄’.

Changed as suggested

16. 16547-4: Consider replacing ‘The goodness of fit. . .’ by ‘The correlation coefficient (R) and the average ratio. . .are used to evaluate the goodness of fit of the regression models.’

We change the sentence as proposed to: “The correlation coefficient (R) and the average ratio the average ratio of calculated $D_{cum}(365)$ to measured $D_{cum}(365)$ are used to evaluate the goodness of fit of the regression models.”

17. 16547-14: Replace ‘and’, with ‘to’.
16547-13: changed as suggested

18. 16547-8: Replace ‘jet’, with ‘yet’.
16547-14: changed as suggested

19. 16547-25: Consider replacing ‘the aquifer material was already. . .’ with ‘the aquifer material had already been in contact with NO₃⁻ bearing groundwater in situ prior to the push-pull tests’
We changed the sentence accordingly to: “...the aquifer material had already been in contact with NO₃⁻-bearing groundwater in situ prior to the push-pull tests.”

20. 16552-9: Replace ‘new’, with ‘newly’.
Changed as suggested. Also changed accordingly in 16550-11.

21. 16552-11 to 13 and 16553-6 to 10: there is inconsistent use of ‘reduced’ and ‘reactive’.
Please decide on one term and use it consistently.
We changed the sentence in 16552-11 to 13 from:
“The growth of denitrifiers might depend on the available stock of reduced compounds (SRC), i.e. on the surface area of **reactive** compounds (saRC) present in the aquifer material.”
to:
“The growth of denitrifiers might depend on the **microbially** available stock of reduced compounds (SRC), i.e. on the surface area of **reduced** compounds (saRC) present in the aquifer material.”
In 16553- 10 we changed: “reactive to “reduced” to settle these inconsistencies.

22. Table 1: Replace ‘filer’, with ‘filter’.
Changed as suggested

23. Figure 6: Replace ‘testet’, with ‘investigated’.
Changed as suggested

Interactive comment on Biogeosciences Discuss., 11, 16527, 2014.

Predicting the denitrification capacity of sandy aquifers from in situ measurements using push-pull ^{15}N tracer tests

5 **W. Eschenbach¹, R. Well¹, and W. Walther^{2,*}**

¹Johann Heinrich von Thünen-Institut, Federal Research Institute for Rural Areas, Forestry and Fisheries, Institute of Climate-Smart Agriculture, Bundesallee 50, 38116 Braunschweig, Germany

10 ²formerly at: Institute for Groundwater Management, Dresden University of Technology, 01062 Dresden, Germany

*retired

Received: 21 October 2014 – Accepted: 3 November 2014 – Published: 2 December 2014

15 Correspondence to: W. Eschenbach (wolfram.eschenbach@ti.bund.de)

Published by Copernicus Publications on behalf of the European Geosciences Union.

20

25

30

Abstract

35 Knowledge about the spatial variability of in situ denitrification rates ($D_r(\text{in situ})$) and their relation to the denitrification capacity in nitrate-contaminated aquifers is crucial to predict the development of groundwater quality. Therefore, 28 push-pull ^{15}N tracer tests for the measurement of in situ denitrification rates were conducted in two sandy Pleistocene aquifers in Northern Germany.

40 The ^{15}N analysis of denitrification derived ^{15}N labelled N_2 and N_2O dissolved in water samples collected during the push-pull ^{15}N tracer tests was performed by isotope ratio mass spectrometry (IRMS) in the lab and additionally for some tracer tests online in the field with a quadrupole membrane inlet mass spectrometer (MIMS), in order to test the feasibility of on-site real-time ^{15}N analysis. Aquifer material from the same locations and depths as the push-pull injection points was incubated and the initial and cumulative denitrification after one year of incubation ($D_{\text{cum}}(365)$) as well as the stock of reduced compounds (SRC) was compared
45 with in situ measurements of denitrification. This was done to derive transfer functions suitable to predict $D_{\text{cum}}(365)$ and SRC from $D_r(\text{in situ})$.

$D_r(\text{in situ})$ ranged from 0 to $51.5 \mu\text{g N kg}^{-1} \text{ d}^{-1}$. Denitrification rates derived from onsite isotope analysis using membrane-inlet mass spectrometry satisfactorily coincided with laboratory analysis by conventional isotope ratio mass spectrometry, thus proving the
50 feasibility of in situ analysis. $D_r(\text{in situ})$ was significantly higher in the sulphidic zone of both aquifers compared to the zone of non-sulphidic aquifer material. Overall, regressions between the $D_{\text{cum}}(365)$ and SRC of the tested aquifer material with $D_r(\text{in situ})$ exhibited only a modest linear correlation for the full data set. But the predictability of $D_{\text{cum}}(365)$ and SRC from $D_r(\text{in situ})$ data clearly increased for aquifer samples from the zone of NO_3^- -bearing groundwater.

55 In the NO_3^- -free aquifer zone a lag phase of denitrification after NO_3^- -injections was observed, which confounded the relationship between reactive compounds and in situ denitrification activity. This finding was attributed to adaptation processes in the microbial community after NO_3^- -injections. ~~Exemplarily, it~~ was also demonstrated that the microbial community in the NO_3^- -free zone ~~close-just~~ below the NO_3^- -bearing zone can be adapted to
60 denitrification by ~~amending wells with~~ NO_3^- -injections into wells for an extended period. In situ denitrification rates were 30 to 65% higher after pre-conditioning with NO_3^- . Results from this study suggest that such pre-conditioning is crucial for the measurement of $D_r(\text{in situ})$ in deeper aquifer material from the NO_3^- -free groundwater zone and thus for the prediction of $D_{\text{cum}}(365)$ and SRC from $D_r(\text{in situ})$.

65

1 Introduction

Denitrification, the microbial mediated reduction of nitrate (NO_3^-) and nitrite (NO_2^-) to the nitrogen gasses nitric oxide (NO), nitrous oxide (N_2O) and dinitrogen (N_2) is important to water quality and chemistry at landscape, regional and global scales (Groffman et al., 2006). NO_3^- is quantitatively the most abundant reactive nitrogen (Nr^1) species. Diffuse NO_3^- emissions from the agricultural sector are the dominant source of Nr fluxes to aquifers. Denitrification in aquifers, reviewed e.g. by Korom (1992), Hiscock et al. (1991), Burgin and Hamilton, (2007) and Rivett et al. (2008), ranges from 0 to 100% of total NO_3^- input with a high spatial variability (Seitzinger et al., 2006). This leads to the question, of how individual aquifers will respond to the anthropogenic NO_3^- pollution ~~of in~~ groundwater. ~~Not only the questions~~ This problem not only depends on how rates of denitrification will respond to Nr loading (Seitzinger et al., 2006) but also on ~~and~~ where and how long denitrification in aquifers can remediate NO_3^- pollution (Kölle et al., 1985) ~~are of importance~~. Since ~~e~~Continuous NO_3^- input via seepage waters leads to ongoing exhaustion of the reductive capacity of aquifers. This can be a problem for keeping ~~the standard for~~ NO_3^- in drinking water below the limit of $\leftarrow 50 \text{ mg L}^{-1}$; (Drinking Water Directive 98/83/EC) and also be problematic due to possible eutrophication of surface waters ~~bodies~~ (Vitousek et al., 1997). But NO_3^- can also mobilise ~~unforeseen deposits of species such as~~ uranium (U) in aquifers, which can be mobilised if NO_3^- reaches reduced aquifer zones (Senko et al., 2002; Istok et al., 2004). Therefore, knowledge about the denitrification capacity of aquifers is needed to predict the possible development of groundwater quality.

The presented study continues previous research on denitrification rates measured in two sandy Pleistocene aquifers in Northern Germany (Fuhrberger Feld aquifer (FFA) and the aquifer of Großenkneten (GKA)). Frind et al. (1990) reported that due to lithotrophic denitrification, NO_3^- has a half-life of 1 to 2 years in the deeper zone (below 5 to 10 m) of the well investigated Fuhrberger Feld aquifer. Weymann et al. (2010) reported very low denitrification rates with values as low as $4 \mu\text{g N kg}^{-1} \text{ d}^{-1}$ in the uppermost surface ~~near~~ groundwater, in the organotrophic denitrification zone of the same aquifer. In a recent study, Eschenbach and Well (2013) measured median denitrification rates of 15.1 and $9.6 \text{ mg N kg}^{-1} \text{ yr}^{-1}$ during one year of anaerobic incubations of FFA and GKA aquifer samples, with significantly higher denitrification rates in the deeper parts of both aquifers. This study showed that the cumulative denitrification after prolonged incubation of aquifer samples is correlated to the stock of reduced compounds (SRC). Similar results had been obtained earlier

100 | ~~obtained~~ for ~~another~~ aquifers in Northern Germany (Konrad, 2007). While we found close correlations between initial laboratory denitrification rates and the SRC in aquifer zones where NO_3^- is present in groundwater, samples from NO_3^- -free groundwater zone showed a lag time of denitrification of several weeks during incubations (Eschenbach and Well, 2013) possibly due to the initial absence of denitrifying enzymes. These findings demonstrate, that
105 | the SRC can be estimated from denitrification rates in case the microbial community is adapted to denitrification (Eschenbach and Well, 2013).

In situ denitrification rates can be measured using single well push-pull tests where a test solution containing solutes of interest is rapidly injected into a well (push-phase) and process information is obtained from analysing groundwater collected during the subsequent pull-
110 | phase. These tests, perhaps first used for in situ measurement of denitrification rates by Trudell et al. (1986), have proven to be a relatively low-cost ~~instrument-technique~~ to obtain quantitative information about several aquifer properties. This method was applied in a variety of studies to derive in situ denitrification rates indirectly by the measurement of NO_3^- depletion during push-pull tests (Trudell et al., 1986; Istok et al., 1997, 2004; Schroth et al.,
115 | 2001; McGuire et al., 2002; Harris et al., 2006). In comparison only a limited number of studies directly measured denitrification rates from the gaseous denitrification products (Sanchez-Perez et al., 2003; Kneeshaw et al., 2007; Well and Myrold, 2002, 1999; Addy et al., 2002; Well et al., 2003; Addy et al., 2005; Kellogg et al., 2005; Konrad, 2007). ~~Beside~~
120 | ~~Aside from the study of~~ Konrad (2007), these push-pull tests were only conducted in ~~surface~~ ~~nearuppermost~~ groundwater.

Well et al. (2005) showed that in situ denitrification rates measured with the push-pull ^{15}N tracer method in the saturated zone of hydromorphic soils agreed relatively well with denitrification rates measured in parallel soil samples. Konrad (2007) reported a close correlation between in situ denitrification rates and the cumulative denitrification after at least
125 | one year of incubation based on a small number of only 5 comparisons, so ~~only at the~~ ~~relatively~~ ~~small~~ data set was ~~relatively-small~~ ~~used~~ to derive ~~robust~~-transfer functions.

Since denitrification is a microbially mediated ~~redox~~-reaction, the composition, activity and amount of microbes in aquifers should directly influence the measured denitrification rates during single well push-pull tests. It is known that steep gradients in the composition of
130 | microbial communities occur in aquifers resulting from the distribution and availability of electron donors and acceptors in aquifers (Kölbelboelke et al., 1988; Griebler and Lueders, 2009; Santoro et al., 2006). Law et al. (2010) reported substantial changes in the microbial community composition after the ~~begin~~-~~initiation~~ of denitrification and the transition from

135 | denitrification to Fe(III)-reduction within incubated aquifer material. Higher microbial
activities after bio-stimulation of indigenous microorganisms by the injection of electron
donors into aquifers was reported by Istok et al. (2004), Kim et al. (2005) and Kim et al.
(2004). Compared with preceding push-pull tests at the same groundwater monitoring wells,
140 | the multiple injection of electron donors increased the reduction rates of NO_3^- , pertechnetate
(Tc(VII)) and U(VI) measured during subsequent push-pull tests in a shallow unconfined
silty-clayey aquifer (Istok et al., 2004). Trudell et al. (1986) found increasing denitrification
rates during a 12 day push-pull test in NO_3^- -free groundwater suggesting that the microbial
community needed a certain time to adapt to the electron acceptor NO_3^- before denitrification
could proceed at a rate equivalent to the availability of reduced compounds. So far, the effect
145 | of different ambient redox conditions, i.e. the presence or absence of NO_3^- in groundwater, on
the outcome of push-pull tests, has been insufficiently considered. At all the possible
influence of the location of push-pull tests within aquifers regarding the presence or absence
of NO_3^- on measured in situ denitrification rates in groundwater has not been addressed so far.
Overall, the performance of previous push-pull studies suggests that this approach may be
suitable to deliver in situ denitrification data that reflect the reduction capacity of the aquifer,
150 | i.e. it might be used to estimate SRC without the need for collecting aquifer material.
Nevertheless, individual aquifer samples should always be analysed to verify these estimates
repeatedly.

To test if ^{15}N push-pull tests could be evaluated during the course of experiments directly in
the field, a membrane inlet mass spectrometer (MIMS) was used during 5 push-pull tests at
155 | two monitoring wells for direct field measurements of ^{15}N labelled denitrification products
(see Supplement). The main advantages of MIMS with respect to the conventional IRMS
approach is that MIMS is low-priced compared to IRMS and results can be obtained ~~in the~~
~~course of~~during experiments directly in the field. Sampling intervals can thus be adapted to
get more precise rates. Moreover, the length of the ~~pull-pull~~ phase can be limited to the
160 | duration of clearly increasing $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ concentrations to save ~~working time~~hours of
labour. Finally, the relatively low cost and simple handling of the MIMS system are
favourable to enable extensive application of the ^{15}N push-pull approach to explore
denitrification capacities of aquifers.

This study is the second part of a combined approach (a) to quantify exhaustibility of the
165 | denitrification capacity in aquifers, (b) to investigate controlling factors and derive predictive
models during incubation experiments, and (c) to check if the cumulative denitrification
measured after one year of incubation ($D_{\text{cum}}(365)$) (Eschenbach and Well, 2013) can be

derived from in situ denitrification rates measured with push-pull tracer tests. Here a study on objective (c) is presented. The specific objectives of this study are (i) to measure in situ
170 denitrification rates with push-pull ^{15}N tracer tests at groundwater monitoring wells, (ii) to develop regression models to predict $D_{\text{cum}}(365)$ as well as the stock of reduced compounds from in situ denitrification rates, and (iii) to test an approach to adapt the microbial community in NO_3^- -free aquifer zones to NO_3^- as a newly available electron donor during experiments as a means of conditioning prior to subsequent push-pull ^{15}N tracer tests.
175 Additionally (iv) the suitability of MIMS for online field analysis during ^{15}N tracer tests was tested (Supplement).

2 Materials and methods

180

2.1 Study sites

In situ measurements of denitrification were conducted in the Fuhrberger Feld aquifer (FFA) and the Großenkneten aquifer (GKA). Both aquifers are located in drinking water catchment
185 areas in the North-north of Germany. The FFA is situated about 30 km NE of the city of Hanover and the GKA about 30 km SW of the city of Bremen. Both aquifers consist of carbonate free, Quaternary-quaternary sands and the deeper parts of the GKA additionally of carbonate free marine sands (Pliocene). The thickness of the FFA and GKA is 20 to 40 and 60 to 100 m, respectively. Both aquifers are unconfined and contain unevenly distributed
190 amounts of microbially available sulphides and organic carbon. Intensive agricultural land use leads to considerable NO_3^- inputs to the groundwater of both aquifers (Böttcher et al., 1989; van Berk et al., 2005; Schuchert, 2007). Groundwater recharge is 250 mm yr^{-1} in the FFA (Wessolek et al., 1985) and 200 to 300 mm yr^{-1} in the GKA (Schuchert, 2007).

Evidence of an intense ongoing denitrification within the FFA is given by NO_3^- and redox
195 gradients (Böttcher et al., 1992) as well as excess- N_2 measurements (Weymann et al., 2008). The FFA can be divided into two hydro-geochemical zones, the zone of organotrophic denitrification near the groundwater surface with organic carbon (C_{org}) as electron donor and a deeper zone of predominantly lithotrophic denitrification with pyrite as electron donor (Böttcher et al., 1991, 1992). Detailed information about the FFA is given by Strebel et al.
200 (1992), Frind et al. (1990) and von der Heide et al. (2008). The geological structure of the GKA is described in Howar (2005) and Wirth (1990). Extended zones with oxidizing and

reducing conditions in the groundwater are evident in the GKA (van Berk et al., 2005) but their distribution within the aquifer is more complex ~~as~~-than in the FFA and denitrification is known to occur in the zone of reduced groundwater (van Berk et al., 2005). Own excess-N₂ measurements (Well et al., 2012) at monitoring wells prove intense denitrification within the GKA. But there are no studies on the type of denitrification in this aquifer.

2.2 Single well push-pull ¹⁵N tracer tests

2.2.1 Well types and sampling procedure

To quantify in situ denitrification rates ($D_r(\text{in situ})$), a total of 28 single well push-pull ¹⁵N tracer tests, afterwards referred to as push-pull tests, were performed in the FFA and GKA (Table 1) by injecting ¹⁵N labelled NO₃⁻ tracer solution into groundwater monitoring wells. In the FFA, push-pull tests were conducted at multilevel wells consisting of PE tubings (4 mm ID) (Böttcher et al., 1985). Each of these ~~tubings~~-tubes were connected to a filter element at the respective depth. In the GKA, two types were used, (i) conventional groundwater monitoring wells (101 mm ID) with 1 to 4 m long filter screens and (ii) multilevel wells (CMT multilevel system, Soilinst, Georgetown, Canada) consisting of PE pipes with 3 individual channels (13 mm ID) with 25 cm long filter screens at the end. Each channel ended in a different depth. To allow a direct comparison with a previous laboratory incubation study (Eschenbach and Well, 2013), wells from the same locations and with filter screens at the same depth where the aquifer samples had been collected were selected in the FFA and GKA. In situ experiments were conducted principally as described in previous studies (Addy et al., 2002; Trudell et al., 1986; Well et al., 2003).

For sampling multilevel wells, groundwater and tracer solution were extracted with a peristaltic pump (Masterflex COLE-PARMER, Vernon Hills, USA). A submersible pump (GRUNDFOS MP1, Bjerringbro, Denmark) was used for common groundwater monitoring wells. During sampling, an outflow ~~tubing~~-tube with the extracted groundwater or tracer solution was placed at the bottom of 26 or 120 ml serum bottles (multilevel wells and common groundwater monitoring wells, respectively). After an overflow of at least three times the volume of these bottles, the tubing was removed and the bottles were immediately sealed air tight with grey butyl rubber septa (ALTMANN, Holzkirchen, Germany) and aluminium crimp caps. ~~4~~-Four replications were collected per sampling. Groundwater was sampled from the injection depth prior to each push-pull test.

2.2.2 Push-pull tests

240 A single well push-pull test consists of the injection of a tracer solution into a monitoring well (push-phase) and the extraction of the mixture of test solution and groundwater from the same well (pull-phase).

Push-phase

245 To prepare the tracer solution, 50 L of groundwater were extracted from multilevel wells (FFA and GKA) or 220 L at common groundwater monitoring wells (GKA) for each push-pull test (Fig. 1). The groundwater was pumped to a stainless steel storage container (Type BO 220 L, SPEIDEL, Ofterdingen, Germany), which was equipped with a floating lid to avoid gas exchange with the atmosphere and thus maintain the dissolved gas composition of
250 the extracted groundwater. After extraction, a stock solution of deionised water (100 ml) with dissolved ^{15}N labelled potassium nitrate (KNO_3 with 60 atom % ^{15}N) and potassium bromide (KBr) was added to attain a concentration of $10 \text{ mg } ^{15}\text{N} \text{ labelled } \text{NO}_3^- \text{-N L}^{-1}$ and $10 \text{ mg Br}^- \text{ L}^{-1}$, respectively. The mixture of the stock solution and the extracted groundwater is hereinafter referred to as tracer solution. The tracer solution was mixed for 1 h with a submersible pump
255 (Gigant, Eijkelkamp, Giesbeek, ~~the~~-Netherlands) within the stainless steel storage container. The extracted groundwater from the NO_3^- bearing groundwater zone (NO_3^- -bearing zone) contained varying concentrations of NO_3^- (Table 2). Consequently, the NO_3^- in the tracer solution of these push-pull tests was a mixture of natural and ^{15}N enriched NO_3^- and NO_3^- concentrations in these tracer solutions were $> 10 \text{ mg } \text{NO}_3^- \text{-N L}^{-1}$ (see discussion about
260 influence of NO_3^- concentrations on denitrification rates in Sect. 4.2 and in Eschenbach and Well, 2013).

During injection, the outflow of the stainless steel storage container was connected with Tygon® tubings to the selected depths of the multilevel wells. For common groundwater monitoring wells the submersible pump was connected with a pump riser pipe and an
265 inflatable packer (Packer set, UIT Umwelt- und Ingenieurtechnik GmbH, Dresden, Germany). The packer was installed within the groundwater monitoring well to prevent mixing of the injected tracer solution with the water column in the groundwater monitoring well (Fig. 1). The packer was inflated with air to a pressure of 1 bar above the pressure of the overlying water column. The inflated packer and the pump riser pipe remained during the entire tracer

270 test within the groundwater monitoring well. The pump riser pipe was connected with a PVC
hose (13 mm ID) to the stainless steel container. For both types of monitoring wells, the tracer
solution was injected gravimetrically. For common wells injections took 30-45 min, for the
CMT multilevel system 45-80 min and for the multilevel wells in the FFA 150-240 min.

275 **Pull-phase**

The common groundwater monitoring wells in the GKA were constantly sampled at 12 h
intervals. The multilevel wells in the FFA were sampled every 12 h during night and every 3
to 4 h during day to investigate more detailed temporal patterns ~~more detailed~~. The multilevel
280 wells were more suitable for this, due to their smaller dead volumes and lower extraction
rates. The pull phases of the conducted tracer tests lasted a maximum of~~maximal~~ 72 h. The
first sampling was performed immediately after injection. Prior to each sampling, an amount
of tracer solution sufficient to replace the dead volume of the groundwater monitoring well
was extracted. In total, 4 and 30 to 60 L were extracted per sample~~ing~~ from~~om~~ multilevel and
285 groundwater monitoring wells, respectively. For common groundwater monitoring wells the
sampling volume differed because of different lengths of filter screens and resulting different
dead volumes. During extraction, groundwater temperature, dissolved oxygen, pH and
electrical conductivity were measured with sensors (pH/Oxi 340i and pH/Cond 340i, WTW
Wissenschaftlich-Technische Werkstätten GmbH, Weilheim, Germany) installed in a flow-
290 through chamber.

2.3 Incubation of aquifer material

Laboratory experiments were performed to compare denitrification rates measured during
laboratory anaerobic incubation ($D_r(365)$) with in situ denitrification rates. The incubated
295 aquifer material originated from the same location and depths as the filter screens of the push-
pull test injection points. The aquifer material was sampled and incubated as described in
detail in Eschenbach and Well (2013).

Briefly, aquifer material from both aquifers ~~were~~was collected between 2 to 68 m below soil
ground surface. The aquifer samples were incubated in transfusion bottles, in 3 to 4
300 replications. ^{15}N labelled KNO_3 solution was added and the transfusion bottles were sealed
airtight. To ensure anaerobic conditions during incubation, the headspaces of the transfusion
bottles were evacuated and flushed with pure N_2 . Afterwards, the samples were incubated for
one year in the dark at 10 °C, which is approximately the groundwater temperature in both

305 aquifers. The transfusion bottles were shaken manually two times a week to mix sediment and batch solution. The headspace and the supernatant batch solution in the transfusion bottles were sampled at days 1, 2, 7, 84, 168 and 365 of incubation.

2.4 Pre-conditioning of wells in the NO_3^- -free zone of the FFA

310 To stimulate denitrification in the NO_3^- -free zone with suspected lack of active denitrifiers (Eschenbach and Well, 2013) groundwater monitoring wells were amended by repeated injections of groundwater with added NO_3^- of natural ^{15}N abundance. Injections were designed to maintain elevated NO_3^- levels in the vicinity of the filter screens during a period of several weeks. This was done to test if in situ denitrification rates measured in these wells
315 after pre-conditioning would reflect the average denitrification rates measured during one year of incubation of corresponding aquifer samples (Eschenbach and Well, 2013).

Pre-conditioning was performed at 4 depths in the NO_3^- -free groundwater zone at multilevel well B4 in the FFA, ~~that~~-which had been previously tested without pre-conditioning. Therefore 800 L of NO_3^- -free reduced groundwater were extracted from a groundwater
320 monitoring well, with a filter screen at 7 to 8m depth below ~~soil~~-ground surface, which is located 30 m west of multilevel well B4, into a 800 L tank ~~container~~-(IBC Tank Wassertank Container 800 L, Barrel Trading GmbH & Co. KG, Gaidorf, Germany) using a drill pump (Wolfcraft Bohrmaschinenpumpe 8 mm Schaft, Wolfcraft GmbH, Kempenich, Germany). The drill pump was connected with a PVC hose (13 mm ID) to the groundwater monitoring
325 well and to the 800 L tank~~-container~~. The extracted groundwater was supplemented with KNO_3 of natural ^{15}N abundance to a concentration of $10 \text{ mg NO}_3^- \text{-N L}^{-1}$. Approximately 40 L of this mixture were injected weekly into each of the depths 7, 8, 9 and 10 m below ~~soil~~
ground surface, respectively, at multilevel well B4. The injection rate was approx. 1 L min^{-1} . For 7 and 8m depth the peristaltic pump and for 9 and 10 m depth the drill pump were used
330 for injection and both pumps were connected with Tygon® tubings to the selected depths of the multilevel well. The first injection took place on 22 February 2011 and the last on 22 March 2011. In total, 5 pre-conditioning injections were conducted at the 4 depths. Subsequently, 4 push-pull tests were performed in the previously pre-conditioned injection depths as described above between 29 March and 1 April 2011.

335

2.5 Analytical techniques

340 2.5.1 Isotope analysis of dissolved N₂ and N₂O

Water samples sampled during push-pull tests were adjusted to 25 °C and a headspace was generated within the serum bottles by the injection of 15 or 40 ml of ambient air into the 26 and 115 ml serum bottles, respectively, replacing the same volume of sample solution. The
345 replaced solution was directly transferred into 20 ml PE vials and frozen for later NO₃⁻ and SO₂⁴⁻ analysis. After headspace generation the serum bottles were agitated for 3 h on a horizontal shaker at a constant temperature of 25 °C to equilibrate the dissolved gases with the headspace gas. Finally, 13 ml of the headspace 10 gas of each serum bottle were extracted with a plastic syringe and then transferred to an evacuated 12 ml sampling vial (Exetainer®
350 Labco, High Wycombe, UK), giving a slight positive pressure within the sampling vial. The sampled nitrogen gases in the 12 ml vials were then a mixture of N₂ and N₂O gained from atmosphere and from denitrification, respectively.

The ¹⁵N analysis of gas samples was performed by isotope ratio mass spectrometry (IRMS) at the Centre for Stable Isotope Research and Analysis in Göttingen, Germany using a Delta V
355 advantage IRMS (Thermo Scientific, Bremen, Germany) following the method described in Well et al. (2003). Analysis included reduction of N₂O to N₂ prior to IRMS entrance. The sum of N₂ and N₂O isotopologues was thus detected as N₂ in the mass spectrometer. In the following, the sum of denitrification derived N₂ and N₂O is referred to as (N₂+N₂O)_{den}. The ¹⁵N abundance of (N₂+N₂O) was derived from the measured 29/28 molecular ion mass ratio.
360 We analysed replicate samples, one was equilibrated by electrodeless discharge and the other untreated (Well et al., 1998). This allowed calculating (N₂+N₂O)_{den} as well as the ¹⁵N abundance in NO₃⁻ undergoing denitrification. N₂O was measured using a gas chromatograph (Fisons GC 8000, Milan Italy) equipped with a split-injector and an electron capture detector and a HP-Plot Q column (50 m length x 0.32mm ID; Agilent Technologies, Santa Clara,
365 USA) kept at 38 °C. Gas analysis was completed within two weeks after the respective push-pull tests. The concentrations of denitrification derived ¹⁵N labelled N₂ and N₂O in the gas samples were calculated as described by Well and Myrold (1999) and Well et al. (2003), respectively. The concentration of N₂O in the added atmospheric air was taken into account when calculating denitrification derived N₂O in the sample. The measured molar
370 concentrations of N₂ and N₂O in the headspace samples were converted into dissolved gas concentrations using gas solubilities given by Weiss (1970) and Weiss and Price (1980) and

taking into account the temperature, headspace pressure and the liquid-to-headspace volume ratio during equilibration of dissolved gases with the headspace gases in the serum bottles.

375 Additionally to the standard IRMS analysis of $(N_2+N_2O)_{den}$ ^{15}N labelled denitrification products were measured with a membrane inlet mass spectrometer (MIMS) during 5 push-pull tracer tests directly in the field (see Supplement).

2.5.2 Analysis of NO_3^- , SO_4^{2-} and Br^-

380 NO_3^- concentrations in the water samples were determined photometrically with a continuous flow analyser (Skalar, Erkelenz, Germany). SO_4^{2-} concentrations were analysed by potentiometric back-titration of excess Ba^{2+} ions remaining in the solution after addition of a defined amount of $BaCl_2$ in excess to SO_4^{2-} . SO_4^{2-} precipitated as $BaSO_4$. The original SO_4^{2-} concentration was then analysed by potentiometric back-titration of the excess Ba^{2+} ions remaining in the solution using EDTA as titrant. Possible interfering metal cations were removed from the samples prior to this analysis by cation exchange. Bromide (Br^-) was analysed with an Inductively Coupled Plasma-Atomic Emission Spectrometer (ICP-AES, Spectro Analytical Instruments, Kleve, Germany) after stabilizing the aliquot of the analysed water samples with 10% HNO_3 .

390

2.6 Calculations of denitrification rates

Measured concentrations of $(N_2+N_2O)_{den}$ were converted from the unit ($\mu g N L^{-1}$) to ($\mu g N kg^{-1}$) under the following assumptions: (i) the average density of the solid aquifer material is 2.65 $g cm^{-3}$ and (ii) the effective porosity of the aquifer material was estimated to be 0.3 from literature values for sediments of similar grain size distribution (Kollmann, 1986), with a range of uncertainty of 0.2 to 0.4, respectively.

395 The concentrations of $(N_2+N_2O)_{den}$ measured during the push-pull tests were corrected for dilution caused by dispersion, diffusion and the tortuosity of the pores. To do this the dilution factor ($F_{dil}(t_i)$) (Eq. 1) was derived from the concentration changes of the conservative tracer Br^- during the push-pull tests as proposed by Sanches-Perez et al. (2003):

$$400 \quad F_{dil}(t_i) = \frac{[Br^-]_{t_0}}{[Br^-]_{t_i}} \quad (1)$$

where $Br^-_{t_0}$ and $Br^-_{t_i}$ are the Br^- concentrations of the injected tracer solution and the sampled tracer solution at sampling time t_i , respectively. The encountered dilution factors ranged from

1 to 20 and were below 5 in 18 push-pull tests. Only during 4 push-pull tests the dilution factors were between 5-10 and during 2 in the range of 10 to 20. The conventional wells (GKA) showed on average higher dilution factors compared with the CMT multilevel system and the multilevel wells in the FFA. Dilution factors were near 1 for most of the push-pull tests in the FFA, i.e. the injected tracer solution interfered little with the surrounding ambient groundwater.

The corrected concentrations of $(N_2+N_2O)_{den}$ are then obtained by multiplying the uncorrected concentrations of $(N_2+N_2O)_{den}$ at time t_i with $F_{dil}(t_i)$. Denitrification rates were calculated from the tangent of dilution corrected time courses of $(N_2+N_2O)_{den}$ concentrations at time intervals with the steepest increase during the respective push-pull test (Sanchez-Perez et al., 2003; Istok et al., 2004). This method was used because we suppose that the section of the steepest increase of measured denitrification products during a push-pull test is the best approximation of the maximal denitrification rate possible in the aquifer at the very location of the respective push-pull test. The rationale behind this is: We suppose that the maximal possible denitrification rate measurable at a certain point in an aquifer is dependent on the amount of reduced compounds in the aquifer material capable of supporting denitrification. Also the measured denitrification rate during a push-pull test is dependent on the state of the microbial community in the aquifer material at the location of the conducted push-pull test. For example, if in situ denitrification rates are measured in the zone of NO_3^- free groundwater, microbes might need time to express the appropriate enzymes to start to denitrify after injection of the NO_3^- containing tracer solution. Since it is unknown how long this adaption time might be, the highest measurable denitrification rate during a push-pull test should give an approximation for the maximal possible denitrification rate at the very point of the push-pull test (see also Sect.4.1.2 and 4.2).

2.7 Detection limit and precision of $(N_2 + N_2O)_{den}$ measurements

The detection limit of ^{15}N analysis was calculated as the minimum amount of ^{15}N labelled $(N_2+N_2O)_{den}$ mixed with the given background of headspace N_2 of natural ^{15}N abundance necessary to increase the measured $^{29}N_2/^{28}N_2$ ratio to fulfil the following equation:

$$r_{sa} - r_{st} \geq 3 \times sdr_{st} \quad (2)$$

440 | where r_{sa} and r_{st} are the $^{29}\text{N}_2/^{28}\text{N}_2$ ratios in sample and standard, respectively and sdr_{st} is the ~~SD~~ **standard deviation (SD)** of repeated r_{st} measurements. The r_{st} values were analysed with IRMS by measuring repeated air samples. Under the experimental conditions, the detection limit for the amount of $(\text{N}_2+\text{N}_2\text{O})_{den}$ was 5 and 1 $\mu\text{g N L}^{-1}$ for samples in 26 and 115 ml serum bottles, respectively, depending on the different ratio of liquid sample to headspace in the respective serum bottles.

445 | The mean coefficient of variation (CV) of concentration measurements of $(\text{N}_2+\text{N}_2\text{O})_{den}$ ($\mu\text{g N L}^{-1}$) in 3 replicates per sampling event during all push-pull tests was 0.18~~%~~. The conversion of concentration data from the unit ($\mu\text{g N L}^{-1}$) to ($\mu\text{g N kg}^{-1}$) increased the mean CV significantly to 0.49~~%~~. (The mean CV after conversion to ($\mu\text{g N kg}^{-1}$) was calculated from the 3 concentrations resulting from the range of effective porosity values (see 450 Supplement).)

2.8 Statistical analysis and modelling

455 | Statistical analysis and regression modelling was conducted with WinSTAT for MS Excel Version 2000.1 (R. Fitch Software, Bad Krozingen, Germany). Experimental data (x) was converted into Box–Cox transformed data ($f_{B-C}(x)$) according to Eq. (3) using different lambda coefficients (λ) to achieve a normal like distribution of experimental data within the different data sets.

460 |
$$f_{B-C}(x) = \frac{(x^\lambda - 1)}{\lambda} \quad (3)$$

465 | Box–Cox transformations were performed with the statistic software STATISTICA 8 (StatSoft, Tulsa, USA). Simple linear regression analysis was conducted to evaluate quantitative relations between in situ denitrification rates ($D_r(\text{in situ})$) and various sediment parameters of corresponding aquifer material measured in the laboratory (Eschenbach and Well, 2013). Normal distribution of the measured parameters within the different data sets and the residuals of linear regressions were tested with the Kolmogorov–Smirnov-Test, normal distribution was assumed at the $P > 0.05$ level, with the null hypothesis that the tested parameter was normal distributed. The uniform distribution of residuals of regressions was 470 | checked with scatter plots of residuals vs. independent variables of the respective regression analysis. This was done to ensure homoscedasticity during regression analysis, i.e. to ensure

that the least-squares method yielded best linear estimators for the modelled parameter. To use the regression functions given in the result section with own data, the experimental values have to be transformed according to Eq. (3) with the lambda coefficients given in Table S2 in the Supplement.

Differences between partial data sets were considered significant at the $P < 0.05$ level (Kruskal–Wallis test (kw) with the null hypothesis that both partial data sets belong to the same population).

2.9 Model sediment properties using regression functions with $D_r(\text{in situ})$

In situ denitrification rates ($D_r(\text{in situ})$) measured during push-pull tests were used to model parameters of the investigated aquifer samples measured in the laboratory. These parameters were: (i) the cumulative denitrification after one year of incubation ($D_{\text{cum}}(365)$), (ii) the stock of reduced compounds (SRC) and (iii) several sediment parameters like water soluble organic carbon (C_{hws}), the fraction of KMnO_4 labile organic carbon (C_1), total sulphur (total-S) and total organic carbon (C_{org}). $D_{\text{cum}}(365)$ is the cumulative amount of denitrification products per kg dry weight of incubated aquifer material at the end of one year of anaerobic incubation (mg N kg^{-1}). The SRC is the amount of sulphides and C_{org} converted into N equivalents (mg N kg^{-1}) according to their potential ability to reduce NO_3^- to N_2 (Eschenbach and Well, 2013). These sediment parameters and denitrification rates were analysed during a laboratory incubation study with aquifer samples from the FFA and GKA (Eschenbach and Well, 2013). The aquifer samples were collected from drilled material obtained during well construction of groundwater monitoring and multilevel wells in the FFA and GKA. The analysed aquifer samples originated from depth intervals of approximately 1 m above to 1 m below filter screens or filter elements of respective groundwater monitoring or multilevel wells, used for push-pull tests (Table 1).

3 Results

3.1 Grouping of push-pull test measuring points

Push-pull tests ~~Wells~~ were grouped into data subsets according to the redox state of groundwater —and chemical properties of the aquifer material from the vicinity of the filter

510 screens of groundwater monitoring wells used for the respective push-pull tests ~~properties into~~
~~the sub data sets~~(aquifer material was collected during well construction) (see also
Eschenbach and Well (2013) Sect. 3.1). These data subsets ~~consist of data from are of push-~~
~~pull tests in wells with filter screens in situ denitrification rates ($D_r(\text{in situ})$) measured in the~~
515 NO_3^- -bearing and NO_3^- -free groundwater zone (NO_3^- -bearing and NO_3^- -free zone,
respectively) and ~~into push-pull tests $D_r(\text{in situ})$ measured wells~~ in the zone of non-sulphidic,
sulphidic, and transition zone aquifer material (Tables 1 and 2).
~~0.4 mg NO_3^- -N L^{-1} was the lowest measured NO_3^- concentration above the limit of detection~~
~~of 0.2 mg NO_3^- -N L^{-1} in the various monitoring wells (Table 2). Therefore, 0.4 mg NO_3^- -N~~
520 ~~L^{-1} was the lowest NO_3^- concentration of groundwater to be considered nitrate bearing in this~~
~~study.~~ Sulphidic and non-sulphidic aquifer material was distinguished using the sulphate
formation capacity (SFC ($\text{mg S kg}^{-1} \text{ yr}^{-1}$)) of incubated aquifer material ~~from the vicinity of~~
~~the respective filter screen of the used monitoring wells~~ (Eschenbach and Well, 2013).
~~Aquifer S_s samples with a SFC > 1 mg SO_4^{2-} -S $\text{kg}^{-1} \text{ yr}^{-1}$ during incubation were assigned~~
525 ~~sulphidic and push-pull tests conducted at wells with filter screens in this zone were~~
~~accordingly assigned to the sulphidic zone.~~ The transition zone was defined as ~~zone within the~~
~~aquifer where~~ aquifer material ~~still contains from the region where~~ sulphides ~~were present~~, but
groundwater still contained NO_3^- . It follows, that the NO_3^- -bearing groundwater zone
comprises the zone of sulphidic aquifer material and the transition zone. ~~For a detailed~~
525 ~~description of the classification of aquifer material see Eschenbach and Well (2013).~~

3.2 In situ denitrification rates and time courses of denitrification products

530 $D_r(\text{in situ})$ ranged from 0.0 to 51.5 $\mu\text{g N kg}^{-1} \text{ d}^{-1}$. Mean $D_r(\text{in situ})$ in the FFA (9.1 $\mu\text{g N kg}^{-1} \text{ d}^{-1}$)
were almost 4 to 5 times higher than in the GKA, but differences between aquifers were not
significant (Figs. 2 and 3, Tables 3 and 4).

The non-sulphidic zone of both aquifers exhibited the lowest mean $D_r(\text{in situ})$ (1.04 $\mu\text{g N kg}^{-1} \text{ d}^{-1}$)
of all partial data sets (Table 4) and statistical significant differences (kw: $P < 0.05$)
occurred with the full and all partial data sets except $D_r(\text{in situ})$ measured in the GKA and in
535 the NO_3^- -bearing zone of both aquifers. The other partial data sets exhibited no significant
differences between one another. Mean $D_r(\text{in situ})$ of the transition zone (9.32 $\mu\text{g N kg}^{-1} \text{ d}^{-1}$)
was slightly higher than in the sulphidic zone of both aquifers.

Except for the multilevel well B6 in 6 m depth, all push-pull injection points with O_2
concentrations above 1 mg $\text{O}_2 \text{ L}^{-1}$ in the groundwater exhibited $D_r(\text{in situ})$ below 0.75 $\mu\text{g N}$

540 $\text{kg}^{-1} \text{d}^{-1}$ (Tables 2 and 3) and aquifer material from these locations were assigned to non-sulphidic aquifer material during laboratory incubations (Eschenbach and Well, 2013). $D_r(\text{in situ})$ measured after pre-conditioning of push-pull injection points at multiple well B4 (FFA) (67.83 to 152.70 $\mu\text{g N kg}^{-1} \text{d}^{-1}$) were 30 to 65 times higher than $D_r(\text{in situ})$ measured one year before without pre-conditioning (2.76 and 2.28 $\mu\text{g N kg}^{-1} \text{d}^{-1}$) (Table 3).

545 Among the total of 28 push-pull tests, 24 were conducted without pre-conditioning from which twelve were located in the NO_3^- -bearing and twelve in the NO_3^- -free zone of both aquifers, respectively. Among the 12 push-pull tests in the NO_3^- -free zone all of the 5 FFA locations showed an exponential increase of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ during push-pull tests, whereas in the GKA this was only the case in two to three of the 7 GKA locations. In contrast to this,

550 only 2 out of 12 push-pull tests in the NO_3^- -bearing zone of both aquifers exhibited exponential increases and these push-pull tests were located in the transition zone of multilevel well B2. The two push-pull tests at multilevel well B4 (NO_3^- -free zone of the FFA) showed an exponential increase of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$. All other push-pull tests in the NO_3^- -bearing zone exhibited almost linear trends. After preconditioning at the same depths of multilevel

555 well B4 in the NO_3^- -free zone, the time course of denitrification products was drastically different compared to the initial tests with a much steeper and initially almost linear trend (Fig. 4).

3.3 Relationship between $D_r(\text{in situ})$, $D_{\text{cum}}(365)$ and aquifer parameters

560

3.3.1 Comparison of $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$

$D_r(\text{in situ})$ was compared with mean denitrification rates during 365 days of laboratory incubation ($D_r(365)$) (Eschenbach and Well, 2013) with aquifer material collected from the

565 locations of the monitoring wells (see Sect. 2.3). $D_r(365)$ was obtained by dividing cumulative $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ production ($D_{\text{cum}}(365)$) by incubation time (365 d). $D_r(\text{in situ})$ was generally lower than $D_r(365)$ (Fig. 3 and Table S1 Supplement). The means of the $D_r(\text{in situ})$ -to- $D_r(365)$ ratio were calculated for the different partial data sets giving a range of 0.05 to 0.47, with the lowest and highest ratios for the data sets of GKA and transition zone push-pull tests,

570 respectively (Table 4). In the transition zone, $D_r(\text{in situ})$ -to- $D_r(365)$ ratios were significantly higher compared to the other data sets (kw: $P < 0.05$). $D_r(\text{in situ})$ of FFA aquifer material was statistically significant closer related to $D_r(365)$ than $D_r(\text{in situ})$ measured in the GKA. The

mean $D_r(\text{in situ})$ -to- $D_r(365)$ ratio from the NO_3^- -bearing zone of both aquifers (0.23) was significantly larger than in the NO_3^- -free zone of both aquifers (0.1) (Table 4).

575 $D_r(\text{in situ})$ after pre-conditioning (well B4, FFA) was comparable or higher than $D_r(365)$ with $D_r(\text{in situ})$ -to- $D_r(365)$ ratios of 0.73 to 2.76 (Fig. 3 and Table 4). $D_r(\text{in situ})$ was 30 to 65 times higher compared to values obtained without pre-conditioning at the same wells (Fig. 5 and Table 3).

580 3.3.2 Regression models to predict $D_{\text{cum}}(365)$, SRC and denitrification relevant aquifer parameters from $D_r(\text{in situ})$

Simple linear regression analysis was applied to obtain regression models for the prediction of $D_{\text{cum}}(365)$ from $D_r(\text{in situ})$ for the full and partial data sets. ~~The goodness of fit of the regression models given by the correlation coefficient (R) and the average ratio of calculated $D_{\text{cum}}(365)$ to measured $D_{\text{cum}}(365)$ for the full and partial data sets.~~ The correlation coefficient (R) and the average ratio of calculated $D_{\text{cum}}(365)$ to measured $D_{\text{cum}}(365)$ are used to evaluate the goodness of fit of the regression models.

585 The goodness of fit of regression models to predict $D_{\text{cum}}(365)$ by $D_r(\text{in situ})$ varied for the various ~~data subsets~~~~sub data sets~~ from no fit in the sulphidic zone ~~and to~~ a good approximation of $D_{\text{cum}}(365)$ by $D_r(\text{in situ})$ in the NO_3^- -bearing zone ($R = 0.04$ and $R = 0.84$, respectively, Table 5). For the full data set, the ~~goodness quality of the~~ fit was modest ($R = 0.62$) resulting in a wide range of deviations between calculated and measured $D_{\text{cum}}(365)$ from -49.1 to $18.1 \text{ mg N kg}^{-1}$ in the different ~~data subsets~~~~sub data sets~~. Linear relationships between $D_r(\text{in situ})$ ~~and~~~~and~~ $D_{\text{cum}}(365)$ were better for GKA in comparison to FFA aquifer material. Aquifer material which was not ~~jet~~~~yet~~ in contact with NO_3^- -bearing groundwater (NO_3^- -free zone and most of sulphidic zone material) exhibited $D_r(\text{in situ})$ values which were clearly less correlated with $D_{\text{cum}}(365)$ than aquifer material which was already in contact with NO_3^- -bearing groundwater (non-sulphidic zone, transition zone and NO_3^- -bearing zone) (Table 5).

595 The goodness of the fit of regression models to calculate the SRC from $D_r(\text{in situ})$ was on average slightly worse than the one of regression models to predict $D_{\text{cum}}(365)$ from $D_r(\text{in situ})$. As for the prediction of $D_{\text{cum}}(365)$ the best goodness of fit of regression models was obtained ~~for the sub data sets~~~~offrom the~~ GKA data sets, the transition zone and the NO_3^- -bearing zone with coefficients of determination of $R = 0.75$, 0.77 and 0.50 (Table 5). Like $D_{\text{cum}}(365)$ also for SRC the prediction was best for zones of both aquifers where the aquifer

material ~~had already been~~~~was already~~ in contact with NO_3^- -bearing groundwater in situ prior to the push-pull tests. Contrary to other partial data sets, the ~~data subset~~~~sub-set~~ of $D_r(\text{in situ})$ measured in sulphidic aquifer material exhibited a clearly better goodness of fit between $D_r(\text{in situ})$ and SRC than between $D_{\text{cum}}(365)$ and $D_r(\text{in situ})$, $R = 0.41$ and $R = 0.04$, respectively.

As already mentioned above pre-conditioning of multilevel well B4 strongly increased the measured $D_r(\text{in situ})$. Here, regressions between $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$ and between $D_r(\text{in situ})$ and SRC exhibited a modest goodness of fit ($R = 0.54$ and $R = 0.53$, respectively) (Table 5).

Regression analysis between several denitrification relevant parameters of aquifer material (Eschenbach and Well, 2013) and $D_r(\text{in situ})$ revealed that for some partial data sets, the linear regressions between some of these parameters and $D_r(\text{in situ})$ were even better than the regression between $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$ (Table S3 Supplement in comparison to Table 5). For GKA aquifer material, $D_{\text{cum}}(365)$ was in closest linear correlation with $D_r(\text{in situ})$.

Contrary to this, for FFA aquifer material $D_r(\text{in situ})$ was closer related to $\text{SO}_4^{2-}_{\text{extr}}$ and C_{hws} than to $D_{\text{cum}}(365)$ or SRC. For ~~data subset~~~~sub-data sets~~ grouped according to the sulphate formation capacity of the incubated aquifer material, several parameters ~~were in~~~~had~~ better or at least the same equal linear correlation to $D_r(\text{in situ})$ than $D_{\text{cum}}(365)$. These parameters were C_{org} and total-S in the non-sulphidic zone, $\text{SO}_4^{2-}_{\text{extr}}$ and total-S in the sulphidic zone, C_{org} and total-S in the transition zone, C_{org} and $\text{SO}_4^{2-}_{\text{extr}}$ in the NO_3^- -bearing zone, and $\text{SO}_4^{2-}_{\text{extr}}$ and C_1 in the NO_3^- -free zone.

4 Discussion

4.1 Quantifying $D_r(\text{in situ})$ with push-pull tests

4.1.1 Ranges of $D_r(\text{in situ})$ -and comparison with previous studies

To compare previous $D_r(\text{in situ})$ data with our measurements, all ~~data~~~~denitrification rates~~ were converted to the dimension $\mu\text{g N kg}^{-1} \text{d}^{-1}$ assuming an effective pore space of 0.3 and an average density of dry aquifer solids of 2.65 g cm^{-3} . $D_r(\text{in situ})$ values measured in the FFA and GKA (Table 3) are comparable with $D_r(\text{in situ})$ ($2.3\text{--}27.1 \mu\text{g N kg}^{-1} \text{d}^{-1}$) measured by Konrad (2007) in two Pleistocene sandy aquifers in Northern Germany (aquifers of Thülsfelde and Sulingen, about 40 km west and 30 km south of the city of Bremen,

respectively). Also D_r (in situ) reported by (Addy et al., (2002) and (Addy et al., (2005) show a similar range of denitrification rates with 2.1–121.2 and 0.5–87.9 $\mu\text{g N kg}^{-1} \text{d}^{-1}$, respectively.

Those values were measured in two riparian sites and a site with marsh sediments ~~on~~ in Rhode Island USA. Somewhat larger spans of D_r (in situ) were reported by Well et al. (2003)

645 for water-saturated mineral sub-soils from various locations in Northern Germany and by Konrad (2007) for the sandy to silty aquifer of Wehnsen (about 30 km southeast of the FFA)

with D_r (in situ) from 0–300 and 45–339 $\mu\text{g N kg}^{-1} \text{d}^{-1}$, respectively. These larger spans also cover ~~also~~ the full rangemagnitude of D_r (in situ) values measured at multilevel well B4 in the FFA after pre-conditioning (Table 3). Sanches-Perez (2003) measured D_r (in situ) from 22.1 to

650 7646.4 $\mu\text{g N kg}^{-1} \text{d}^{-1}$ with the acetylene inhibition method in 2 shallow sandy aquifers in France and Spain. Overall, there is a wide range of reported D_r (in situ) in aquifers.

Denitrification rates can also be derived from the analysis of groundwater samples from monitoring-well transects along hypothesized groundwater flow paths. Therefore, Tesoriero and Puckett (2011) selected 12 study sites with monitoring- well transects within the U.S. The study areas represented a wide range of sedimentary environments and climatic conditions.

655 Tesoriero and Puckett (2011) generalized the determined denitrification rates broadly into three categories: low rates ($< 0,02 \mu\text{g N kg}^{-1} \text{d}^{-1}$), medium rates ($0,02-0,06 \mu\text{g N kg}^{-1} \text{d}^{-1}$) and high rates ($> 0,6 \mu\text{g N kg}^{-1} \text{d}^{-1}$). Low to were found in areas with elevated O_2 concentrations in the groundwater, medium rates in the presence of low O_2 concentrations and high

660 denitrification rates when changes in the lithology resulted in a sharp increase in the supply of electron (Tesoriero and Puckett (2011), p. 13). Overall, the denitrification rates obtained from theses monitoring-well transects are below the mean D_r (in situ) of the various data subsets in this study (Table 4). For example the mean D_r (in situ) of non-sulphidic aquifer material was 1

$\mu\text{g N kg}^{-1} \text{d}^{-1}$ (Table 4) and thus even higher than the high denitrification rates reported by

665 Tesoriero and Puckett (2011). The O_2 concentrations in the ambient groundwater at these push-pull locations were mostly clearly above 1 mg L^{-1} , which is near the reported apparent threshold for the onset of denitrification in aquifers (Green et al., 2008, 2010; McMahon et

al., 2004; Tesoriero and Puckett, 2011) (see Sect. 4.3). Mean D_r (in situ) of data subsets of push-pull test at locations with low O_2 concentrations (transition-zone and NO_3^- -free zone)
670 (Table 2) were 9 and 8 $\mu\text{g N kg}^{-1} \text{d}^{-1}$, respectively, and thus by the factor of 10 higher as the high rates reported by Tesoriero and Puckett (2011).

Green et al. (2010) showed that groundwater mixing due to advection and mechanical dispersion can strongly influence the derived apparent denitrification rates along flow paths in a way that these transport processes tend “to create the appearance of lower reaction rates and

675 fractionation parameters when measured at larger scales and longer flow paths” (Green et al.
2010, p 12). Green et al. (2010) showed that mixing effects increase with the mean travel
distances of groundwater and they conclude “that effects of transport and scale should be
considered when comparing reaction rates in different aquifer systems, or when comparing
reaction rates in different parts of the same system”.

680 In contrast, Korom et al. (2005) reported clearly higher zero-order denitrification rate of 35.6
 $\mu\text{g N kg}^{-1} \text{d}^{-1}$ measured by an aquifer mesocosm, this rate is comparable with the highest $D_r(\text{in}$
situ) measured in this study (Table 2). Korom et al. (2012) argued that, contrary to
monitoring-well transects, such transport depending mixing processes would not influence
denitrification rates measured by aquifer mesocosms, since advection and mechanical
685 dispersion are negligible. The influence of advection and mechanical dispersion on the
measured apparent denitrification rates by push-pull test should be higher compared to in situ
mesocosms. On the contrary during push-pull tests, mixing processes by advection and
mechanical dispersion should be significantly lower in comparison to monitoring-well
transects, since the flow path of the injected tracer solution in the aquifer is in a decimeter or
690 maximum meter range during a push-pull test, which is very short compared to flow-paths of
hundreds of meters or several kilometres in case of monitoring-well transects. (Additionally
the mixing of the injected tracer solution with ambient groundwater was taken into account by
the addition of Br^- as conservative tracer to the tracer solution (see Sect. 2.6) to minimise the
influence of mixing effects.)

695 The observed differences in denitrification rates measured in this study with denitrification
rates derived from monitoring-well transects (Tesoriero and Puckett 2011) might thus be
attributed to effects of transport along long flow paths. We think that these effects should also
be considered when denitrification rates are compared that have been derived with different
methods.

700 ~~But there is not only a strong local variability in $D_r(\text{in situ})$ of aquifers also $D_r(\text{in situ})$ can~~
~~change substantially during push-pull tests itself. During a push-pull test conducted by~~
~~Trudell et al. (1986) in situ denitrification rates increased strongly. During the 12-day lasting~~
~~pull-phase of this tracer test in the O_2 and NO_3^- -free groundwater zone of a shallow sandy~~
~~aquifer in south-western Ontario Canada $D_r(\text{in situ})$ increased from 30.3 to 504.6 $\mu\text{g N kg}^{-1} \text{d}^{-1}$~~
705 ~~(Trudell et al., 1986).~~

710 **4.1.2 Temporal and spatial variability of in situ denitrification rates ~~Time course of~~
~~(N₂+N₂O)_{den} and pre-conditioning~~**

~~But There is seem to be not only a strong local~~In addition to possible systematic differences
715 between different methods with respect to the derived denitrification rates, it has to take into
account that also variability in D_g(in situ) of aquifers also D_r(in situ) can show a considerable
temporal variability change substantially during push-pull tests itself. During a push pull test
conducted by Trudell et al. (1986) in situ denitrification rates increased strongly. This was
evident dDuring the 12 day lasting long pull-phase of a push-pull test conducted by Trudell et
al. (1986) this tracer test in the O₂ and NO₃⁻-free groundwater zone of a shallow sandy aquifer
720 in south western Ontario Canada, where D_r(in situ) increased from 30.3 to 504.6 µg N kg⁻¹ d⁻¹
(Trudell et al., 1986).

Comparable to the results of Trudell et al. (1986), in this study most of the push-pull tests in
the NO₃⁻-free zone showed, an exponential increase of (N₂+N₂O)_{den} with time, i.e. increasing
denitrification rates was observed during most of the push-pull tests. Sections-Periods of an
725 exponential ~~time courses~~ increase of dilution corrected denitrification products ~~observed~~
during tracer tests were also previously reported (Eschenbach and Well, 2011; Konrad, 2007).

In the study of Konrad (2007), 5 out of 13 push-pull tests showed an exponential increase of
dilution corrected denitrification products. 4 of these 5 push-pull tests were located in the
NO₃⁻-free groundwater zone. Contrarily, push-pull tests in the NO₃⁻-free zone (consisting of
730 the data subsets of non-sulphidic aquifer material and the transition zone) showed
approximately constant denitrification rates during the push-pull tests. The ~~N~~non-sulphidic
aquifer material exhibited very low denitrification rates during the push-pull tests presumably
also because the aquifer material was depleted in the reduced compounds capable of

supporting (Table S1 in the Supplement and Eschenbach and Well (2013) Sect. 4.2) and
735 dissolved O₂ in groundwater inhibited NO₃⁻ reduction. Dissolved O₂ concentrations in the
ambient groundwater and therefore also in the injected test solutions were > 1 mg O₂ L⁻¹ at 6
out of 8 injection points in the non-sulphidic zone of both aquifers (Table 2) which is near or
above the apparent threshold for the onset of denitrification in aquifers (see Sect. 4.3 below)
whereas in the transition zone O₂ concentrations were far below this threshold. In relation to

740 the amount of reduced compounds of transition zone aquifer material (Table S1 in the
Supplement and Fig.2 in Eschenbach and Well (2013)), which was almost as low the one of
non-sulphidic aquifer material, the measured in situ denitrification rates were comparatively

high (Table 3). Despite the clearly lower SRC content in situ denitrification rates in the transition zone were on average higher than in the NO_3^- -free zone (Table 3). As a result, ~~we~~ We suspect that the clearly different activity of denitrification in relation to the SRC in both data subsets is because the microbial community in the NO_3^- -free zone is not ready to denitrify since it needs time to adapt to NO_3^- as possible electron acceptor.

Therefore, it is concluded, that the exponential increase of denitrification products observed during push-pull tests in our study and previous studies can probably be attributed to growth and stimulation of denitrifiers by the injection of NO_3^- into aquifer zones that have previously not been in contact with NO_3^- . Trudell et al. (1986) found an increase of denitrifying bacteria species during the 12 day ~~lasting long~~ tracer test which was accompanied by a 17-fold increase of measured denitrification rates. Several other investigations showed increasing microbial activity after bio stimulation of aquifer sediments by the injection of electron donors to monitoring wells (Istok et al., 2004; Kim et al., 2004, 2005). Istok et al. (2004) reported that the viable biomass on solid samplers installed in monitoring wells more than doubled compared with samplers installed in monitoring wells without electron donor addition.

To establish an active denitrifying microbial community in the strict anaerobic zone of an aquifer we injected NO_3^- as newly available electron acceptor in the NO_3^- -free zone at Multilevel well B4 in the FFA. To our knowledge, pre-conditioning of aquifer material prior to a push-pull ^{15}N tracer test by the injection of only ~~NO_3^- NO_3^- as new available electron acceptor~~ was firstly used in ~~the presented~~ this study. ~~This was done to establish a denitrifying microbial community in the strict anaerobic zone of an aquifer.~~ Pre-conditioning at multilevel well B4 (see Sect. 2.4) ~~in the FFA~~ resulted in a 30- to 65-fold increase in measured in situ denitrification rates compared with push-pull tests without pre-conditioning at the same depths of multilevel well B4 (Table 3 and Fig. 5). It can be concluded that pre-conditioning in the NO_3^- -free zone of the FFA led to growth of the community of active denitrifiers in the aquifer material in the vicinity of the respective injection points. The increase of D_r (in situ) due to pre-conditioning might be a combined effect from the increase of active denitrifiers and a higher denitrification rate per microbial cell due to synthesis of enzymes for denitrification. Pre-conditioning ~~resulted lead~~ not only ~~in to~~ higher denitrification rates but also the time course of $(\text{N}_2 + \text{N}_2\text{O})_{\text{den}}$ did not show a ~~section period~~ of a distinct exponential increase compared with prior measurements without pre-conditioning (Fig. 4). This might show that denitrifiers in the tested aquifer material after pre-conditioning were ready to denitrify and that there was a stable denitrifying community, see also Sect. 4.2.

Pre-conditioning also improved the comparability of in situ and laboratory denitrification rates. All in all the measured ~~Higher average~~ denitrification rates during one year of incubation ($D_r(365)$) were on average higher in comparison to denitrification rates derived with normal push pull tests ($D_r(\text{in situ})$). This may have resulted from several factors including the stimulation of denitrification in the lab due to disturbance of aquifer material, establishment of strictly anaerobic conditions and the adaptation of the microbial community over time. The ratio between $D_r(\text{in situ})$ and $D_r(365)$ was highly variable within the data set. Interestingly, it was lowest in the non-sulphidic and NO_3^- -free zones of both aquifers (Table 4). ~~Non-sulphidic aquifer material exhibited low denitrification rates during the push-pull tests also because dissolved O_2 inhibited NO_2^- reduction. Dissolved O_2 concentrations in the ambient groundwater and therefore also in the injected test solutions were $> 1 \text{ mg } \text{O}_2 \text{ l}^{-1}$ at 6 out of 8 injection points in the non-sulphidic zone of both aquifers (Table 2).~~ In case of non-sulphidic aquifer material dissolved O_2 (Table 2) might have inhibited NO_3^- reduction and in the zone of NO_3^- free groundwater. $D_r(365)$ of non-sulphidic aquifer material measured during anaerobic incubation in the laboratory (Eschenbach and Well, 2013) can therefore be seen as a potential activity which is only partly effective under in situ conditions due to a low consumption-reduction rate of dissolved O_2 in groundwater. This is also reflected by the low $D_r(\text{in situ})$ to $D_r(365)$ ratio in the non-sulphidic wells (Table 4).

The mean $D_r(\text{in situ})$ -to- $D_r(365)$ ratio in the NO_3^- -bearing zone were twice as high compared to the NO_3^- -free zone (Table 4 and Fig. 3). This probably reflects the need for microbial adaptation to NO_3^- discussed in the previous section. Mean $D_r(\text{in situ})$ and the ratio of $D_r(\text{in situ})$ -to- $D_r(365)$ of 0.47 were highest in the transition zone, showing that in the transition zone $D_r(\text{in situ})$ and $D_r(365)$ were in closer agreement compared with other zones. During the push-pull tests in the transition zone the ambient concentration of dissolved O_2 ~~were~~ was always below $0.13 \text{ mg } \text{L}^{-1}$ and NO_3^- was always detectable in the ambient groundwater at the 5 injection points in the transition zone (Table 2). Denitrification was therefore presumably not inhibited by dissolved O_2 and the microbial population had already adapted to NO_3^- as an available electron acceptor. Hence, denitrifying conditions during push-pull tests and during laboratory incubation were similar, resulting in closer agreement in denitrification rates.

4.2 Interpretation of observed time courses of produced $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$

Figure 6 sums up our interpretation of the results from push-pull tests in the NO_3^- -free zone. Immediately after the injection of the ^{15}N tracer in the NO_3^- -free zone of both aquifers there

seems to follow a time interval with little to no ~~or negligible~~ production of ^{15}N labelled $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ (=lag-phase) (compare with Figs. 2 and 4). During this time, denitrifiers might still have to synthesise enzymes for denitrification and are not yet ready to denitrify.

815 After the lag-phase follows a phase of exponential increase of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ during which the amount of active denitrifiers and or their activity might adapt to the newly available electron acceptor NO_3^- . The growth of denitrifiers might depend on the microbially available stock of reduced compounds (SRC), i.e. on the surface area of ~~reactive-reduced~~ compounds (saRC) present in the aquifer material. If the denitrifying community is adapted to NO_3^- and had colonized the saRC, denitrification rates should be relatively constant. Hence a zero order
820 reaction model should fit the measured data during the relatively short duration of a push-pull test (Fig. 6, linear response phase). It is suspected that these conditions apply to the NO_3^- -bearing zone but not to the NO_3^- -free zone. After preconditioning at multilevel well B4, $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ was initially high and there was no subsequent exponential increase, while the opposite was the case during previous tests at the same well without pre-conditioning (Fig. 4).

825 This probably reflects ~~a~~-the more constant activity of denitrifiers during the push-pull tests after pre-conditioning (Fig. 6, linear response phase). Similar adaptation effects have been reported previously, where bio-stimulation by injecting electron donors like ethanol, glucose, propane or fumarate resulted in constant activity, thus allowing the use of zero-order reaction models to derive reduction rates during push-pull tests (Istok et al., 2004; Kim et al., 2004,
830 2005). This supports our interpretation that pre-conditioning leads to a kind of equilibrium between the denitrifying community, the injected NO_3^- and the saRC present in the aquifer material, ultimately resulting in relatively constant reaction rates while NO_3^- is not limiting (Fig. 6, linear response phase). In our experiments, the latter condition was fulfilled, because NO_3^- concentrations during the pull-phase were always clearly above $1.0 \text{ mg NO}_3^- \cdot \text{N L}^{-1}$,
835 which is assumed to be the threshold of NO_3^- concentrations limiting denitrification rates reported by Wall et al. (2005).

From the dynamics of microbial adaptation outlined above it follows, that preconditioning prior to push-pull tests in the zone of NO_3^- free groundwater is needed to allow estimating the stock of reduced compounds from in situ denitrification rates.

840

4.3 Predicting $D_{\text{cum}}(365)$ and SRC of aquifer sediments from $D_r(\text{in situ})$

The main objective of this study is to predict the cumulative denitrification measured during one year of laboratory incubation of aquifer samples ($D_{\text{cum}}(365)$) and the stock of reactive

845 | reduced compounds (SRC) from in situ denitrification rates ($D_r(\text{in situ})$). In comparison to costly drilling of aquifer material and laboratory measurement of $D_{\text{cum}}(365)$ and SRC, $D_r(\text{in situ})$ can be measured with relatively low cost push-pull tests at existing groundwater monitoring wells, which would thus allow spatial mapping of denitrification activity within aquifers.

850 There are only scarce data comparing the stock of reduced compounds (SRC) or longer-term denitrification rates (e.g. $D_r(365)$) with $D_r(\text{in situ})$). Well et al. (2003) showed for denitrification in the saturated zone of hydromorphic soils that laboratory derived denitrification rates after 24 h of anaerobic incubation were in good agreement with in situ denitrification rates, but the study was limited to near-surface groundwater. Konrad (2007)

855 tested this approach in deeper aquifer zones with a small data set of pairs of $D_r(\text{in situ})$ vs. D_{cum} (4 push-pull ^{15}N tracer tests and incubations of corresponding aquifer material) and found that both quantities were related (spearman rank correlation coefficients of $R \geq 0.8$). In this study, transfer functions were developed to predict $D_{\text{cum}}(365)$ from $D_r(\text{in situ})$ measurements with a larger data set in different redox zones typically present in aquifers.

860 Moreover, pre-conditioning was evaluated by addition of NO_3^- to aquifer material and the subsequent measurement of in situ denitrification rates. Only a modest goodness of fit ($R = 0.62$) was found using linear regression between $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$ for the full data set (Table 5). Without Box-Cox transformations of input data the correlation coefficient was even lower ($R = 0.1$). This shows that it was necessary to

865 transform the input data to approach normal distribution and homoscedasticity for regression analysis. Otherwise the ordinary least squares method did not find the best or efficient linear estimators for regression coefficients. Like in the previous laboratory study (Eschenbach and Well, 2013) grouping of $D_r(\text{in situ})$ measuring points by locality or according to hydro-geochemical zones increased the

870 predictive power of $D_r(\text{in situ})$ with respect to the measured $D_{\text{cum}}(365)$ and SRC of aquifer material for some partial data sets. Altogether, $D_r(\text{in situ})$ was the best predictor for $D_{\text{cum}}(365)$ and SRC of the partial data set of GKA aquifer material with correlation coefficients of 0.82 and 0.75, respectively. For the FFA the predictive power of $D_r(\text{in situ})$ for $D_{\text{cum}}(365)$ and SRC was significantly lower compared to the GKA (Table 5). This finding mirrors results of

875 laboratory incubations with FFA and GKA material reported by Eschenbach and Well (2013) (Table 4 of the cited study), in which initial denitrification rates ($D_r(7)$) of GKA material were a better predictor of $D_{\text{cum}}(365)$ than in case of FFA material. Contrary to the GKA aquifer samples, the SRC of the FFA samples was not predictable by $D_r(\text{in situ})$. One reason might be

880 a different microbial availability of organic carbon (C_{org}), which is one major constituent of SRC in both aquifers (Eschenbach and Well, 2013). The ratio of KMnO₄ labile organic carbon (C_1) to C_{org} was almost twice as high in the GKA material compared to the FFA material (Eschenbach and Well, 2013), suggesting that the proportion of C_{org} available for microbes is higher in the GKA aquifer material and on the other hand that a significant proportion of C_{org} is unavailable for denitrification in the FFA.

885 Grouping of aquifer material according to hydro-geochemical zones or sediment parameters resulted in better regressions between D_r (in situ) and $D_{cum}(365)$ and SRC for partial data sets where NO_3^- is still present in the groundwater, i.e. in the transition and NO_3^- -bearing zone (Table 5). Konrad (2007) reported similar relationship between D_r (in situ) and $D_{cum}(365)$ under comparable conditions. Relatively weak fits were obtained for data sets with push-pull
890 measuring points located completely or mostly in the zone of NO_3^- free groundwater (NO_3^- -free zone and sulphidic aquifer material, respectively) and in the non-sulphidic zone (Table 5). For the NO_3^- -free zone this is attributed to a missing adaptation of the microbial community to NO_3^- as electron acceptor as discussed above. In the study of Trudell et al. (1986) it took at least 8 days until measured denitrification rates stopped to increase during
895 the push-pull test. In our study, such long pull-periods were not possible because of comparatively higher groundwater velocities in both aquifers. At some injection points in the FFA, the tracer plume had already moved away with groundwater ~~already~~ within 35 h ~~after-of~~ the injection.

The goodness of fit in the modelling of ~~D_r~~ $D_{cum}(\text{in situ } 365)$ and SRC using linear
900 regression functions was highly variable among partial data-sets. The mean ratios of calculated $D_{cum}(365)$ to measured $D_{cum}(365)$ and calculated SRC and measured SRC were best for the transition zone with ratios near 1, ~~and worst for the sulphidic and NO_3^- -free zone (Table 5).~~ We suppose the reasons for this might be (i) that residual reduced compounds, that could support denitrification were still present in the aquifer material, (ii) the O_2 concentrations in the ambient groundwater (Table 2) were far below the reported apparent threshold of $< 40 - 60 \mu\text{mol L}^{-1}$ ($\approx 1.5 - 2.3 \text{ mg } O_2 \text{ L}^{-1}$) for the onset of denitrification in aquifers (Green et al., 2008, 2010; McMahon et al., 2004; Tesoriero and Puckett, 2011) (see also Sect. 4.1 in Eschenbach and Well (2013)) and (iii) NO_3^- was present in the ambient groundwater of the transition zone. Therefore we expect that the microbial community was
905 already adapted to NO_3^- , i.e. ready to denitrify, and denitrification was not inhibited by dissolved O_2 . Conversely, in the non-sulphidic zone higher O_2 concentrations might have inhibited denitrification and this might have been limiting for D_r (in situ) than the limited
910

915 content of reduced compounds. This might explain the poor fit between calculated and measured values (Table 5) in the non-sulphidic zone. In the NO_3^- -free zone the groundwater was almost O_2 free and, in comparison to the other zones, the aquifer material had a larger stock of reduced compounds (Table S1 in the Supplement). But nonetheless the correlation coefficients between $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$ and $D_r(\text{in situ})$ and the SRC were very low and the developed regression functions ~~$D_r(\text{in situ})$~~ underestimated especially $D_{\text{cum}}(365)$ and SRC of deeper aquifer samples with high values of $D_{\text{cum}}(365)$ and SRC to a large extent (Table 5).
920 We suppose the reason for this is ~~apparently because of~~ the lack of adaptation of the microbial community to NO_3^- , as already discussed above.

Pre-conditioning at multilevel well B4 led to a clearly better fit of $D_r(\text{in situ})$ and $D_r(365)$ (Table 4). This indicates that pre-conditioning should increase the predictability of $D_{\text{cum}}(365)$ and probably also of SRC from $D_r(\text{in situ})$ measurements in the NO_3^- -free zone.

925

5 Conclusions

930 The possibility to predict the capacity of aquifer zones to remove NO_3^- inputs over extended time periods based on in situ measurement of denitrification rates (~~$D_r(\text{in situ})$~~) was evaluated in two Pleistocene aquifers in Northern Germany. This was done by comparison of $D_r(\text{in situ})$ with denitrification parameters determined in aquifer material samples, i.e. the stock of reduced compounds (SRC) and the cumulative denitrification measured during one year of incubation in the laboratory ($D_{\text{cum}}(365)$).
935 ~~Direct comparison of in situ push-pull tests and laboratory incubations to determine the cumulative denitrification measured during one year of incubation ($D_{\text{cum}}(365)$) and the stock of reduced compounds (SRC) of aquifer material proved to be a suitable approach to calibrate linear regression models.~~

Prediction of $D_{\text{cum}}(365)$ and SRC from $D_r(\text{in situ})$ for data sets containing data from both aquifers was only satisfactory in the aquifer zones where NO_3^- was present. This type of in
940 situ tests might thus be suitable for mapping $D_{\text{cum}}(365)$ and SRC in NO_3^- bearing zones of Pleistocene sandy aquifers using existing monitoring wells. It is thus a promising and low-cost method to estimate $D_{\text{cum}}(365)$ of aquifer material from aquifer zones where NO_3^- is still present in the groundwater. Our results also indicate that the push-pull technique (without pre-conditioning) is not suited to derive the SRC or $D_{\text{cum}}(365)$ of aquifer samples from in situ
945 denitrification rates under conditions where the groundwater is nitrate-free. Moreover, future routine applications of this approach could be facilitated by online field analysis using

membrane inlet mass spectrometry, which we demonstrated to be feasible and precise—(see Supplement). Still, the correction for dilution of the injected tracer solution with ambient groundwater is ~~requested~~ necessary when using membrane inlet mass spectrometry in the field (see Sect. 2.6 and the Supplement).

950

In the NO_3^- -free aquifer zone increasing denitrification rates were observed during the conducted push-pull tests, which ~~was~~ were interpreted as the result of adaptation processes of the denitrifying communities following NO_3^- injections. Also D_r (in situ) without pre-conditioning ~~were~~ was generally lower than average denitrification rates after one year of incubation ($D_r(365)$) in the laboratory. This was especially the case for D_r (in situ) measurements in the NO_3^- free groundwater zone. In this study it was demonstrated exemplarily that the microbial community in the NO_3^- -free zone ~~elose~~ just below the NO_3^- -bearing zone can be adapted to denitrification by amending wells with NO_3^- injections for an extended period. In situ denitrification rates measured after this pre-conditioning reflected the $D_{\text{cum}}(365)$ and SRC more satisfactorily. From this findings it is assumed that microbial adaptation after NO_3^- injection confounded the relationship between reactive compounds present in the tested aquifer material and D_r (in situ) measured during push-pull tests, which resulted in poor prediction of $D_{\text{cum}}(365)$ and SRC from D_r (in situ). Therefore we assume that pre-conditioning is a prerequisite for the measurement of in situ denitrification rates using push-pull tracer tests in the NO_3^- free groundwater zone. Further research is needed to check if this microbial adaptation would also work in deeper layers far below the NO_3^- -bearing zone.

955

960

965

Acknowledgements

This research was made possible by financial support from the Deutsche Bundesstiftung Umwelt (DBU). The authors would like to thank I. Ostermeyer and K. Schmidt for their assistance in the laboratory, L. Szvec and R. Langel (Centre for Stable Isotope Research, University of Göttingen) for stable isotope analyses, R. Hoppe and W. Raue (enercity Hannover) for support during pre-conditioning and W. Duijnsveld (Federal Institute for Geosciences and Natural Resources (Hannover), M. Dietze and R. Liedl (Institut für Grundwasserwirtschaft (Dresden)) for technical support the push-pull tests. We would also like to thank Jeremy Smith for suggestions to improve the language. Two anonymous reviewers and the associate editor of this journal are gratefully acknowledged for their valuable comments on a previous version of this manuscript.

970

975

The Supplement related to this article is available online at
 doi:10.5194/bgd-11-16527-2014-supplement.

References

Addy, K., Kellogg, D. Q., Gold, A. J., Groffman, P. M., Ferendo, G., and Sawyer, C.: In situ push-pull method to determine ground water denitrification in riparian zones, *J. Environ. Qual.*, 31, 1017-1024, 2002.

Addy, K., Gold, A., Nowicki, B., McKenna, J., Stolt, M., and Groffman, P.: Denitrification capacity in a subterranean estuary below a Rhode Island fringing salt marsh, *Estuaries*, 28, 896-908, 2005.

Böttcher, J., Strebel, O., and Duijnisveld, W. H. M.: Vertikale Stoffkonzentrationsprofile im Grundwasser eines Lockergesteins-Aquifers und deren Interpretation (Beispiel Fuhrberger Feld), *Z. dt. Geol. Ges.*, 136, 543-552, 1985.

Böttcher, J., Strebel, O., and Duijnisveld, W. H. M.: Kinetik und Modellierung gekoppelter Stoffumsetzungen im Grundwasser eines Lockergesteins-Aquifers., *Geoll Jahrb Reihe C 51*, 3-40, 1989.

Böttcher, J., Strebel, O., and Duijnisveld, W. H. M.: Reply (to a comment of Scott F. Korom), *Water Resources Research*, 27, 3275-3278, 1991.

Böttcher, J., Strebel, O., and Kölle, W.: Redox conditions and microbial sulfur reactions in the Fuhrberger Feld sandy aquifer., *Progress in Hydrogeochemistry*, 219-226, 1992.

Burgin, A. J., and Hamilton, S. K.: Have we overemphasized the role of denitrification in aquatic ecosystems? A review of nitrate removal pathways, *Front. Ecol. Environ.*, 5, 89-96, 10.1890/1540-9295(2007)5[89:hwotro]2.0.co;2, 2007.

Eschenbach, W., and Well, R.: Online measurement of denitrification rates in aquifer samples by an approach coupling an automated sampling and calibration unit to a membrane inlet mass spectrometry system, *Rapid Commun. Mass Spectrom.*, 25, 1993-2006, 10.1002/rcm.5066, 2011.

- 1010 Eschenbach, W., and Well, R.: Predicting the denitrification capacity of sandy aquifers from shorter-term incubation experiments and sediment properties, *Biogeosciences*, 10, 1013-1035, 10.5194/bg-10-1013-2013, 2013.
- Frind, E. O., Duynisveld, W. H. M., Strebel, O., and Boettcher, J.: Modeling of multicomponent transport with microbial transformation in groundwater - The Fuhrberg case, *Water Resources Research*, 26, 1707-1719, 1990.
- 1015 [Green, C. T., Puckett, L. J., Bohlke, J. K., Bekins, B. A., Phillips, S. P., Kauffman, L. J., Denver, J. M., and Johnson, H. M.: Limited occurrence of denitrification in four shallow aquifers in agricultural areas of the United States, *J. Environ. Qual.*, 37, 994–1009, doi:10.2134/jeq2006.0419, 2008.](#)
- 1020 [Green, C. T., Bohlke, J. K., Bekins, B. A., and Phillips, S. P.: Mixing effects on apparent reaction rates and isotope fractionation during denitrification in a heterogeneous aquifer, *Water Resour. Res.*, 46, W08525, doi:10.1029/2009wr008903, 2010.](#)
- Griebler, C., and Lueders, T.: Microbial biodiversity in groundwater ecosystems, *Freshw. Biol.*, 54, 649-677, 10.1111/j.1365-2427.2008.02013.x, 2009.
- 1025 Groffman, P. M., Altabet, M. A., Bohlke, J. K., Butterbach-Bahl, K., David, M. B., Firestone, M. K., Giblin, A. E., Kana, T. M., Nielsen, L. P., and Voytek, M. A.: Methods for measuring denitrification: Diverse approaches to a difficult problem, *Ecol. Appl.*, 16, 2091-2122, 2006.
- 1030 Harris, S. H., Istok, J. D., and Suffita, J. M.: Changes in organic matter biodegradability influencing sulfate reduction in an aquifer contaminated by landfill leachate, *Microb. Ecol.*, 51, 535-542, 10.1007/s00248-006-9043-y, 2006.
- Hiscock, K. M., Lloyd, J. W., and Lerner, D. N.: Review of natural and artificial denitrification of groundwater, *Water Res.*, 25, 1099-1111, 1991.
- 1035 Howar, M.: Geologische 3D-Untergrundmodellierung im Bereich Großenkneten/Ahlhorn., unpubl. Expertise: INSIGHT. Geologische Softwaresysteme GmbH. Köln., Germany, 11 S., 2005.

- Istok, J. D., Humphrey, M. D., Schroth, M. H., Hyman, M. R., and Oreilly, K. T.: Single-well, "push-pull" test for in situ determination of microbial activities, *Ground Water*, 35, 619-631, 1997.
- 1040 Istok, J. D., Senko, J. M., Krumholz, L. R., Watson, D., Bogle, M. A., Peacock, A., Chang, Y. J., and White, D. C.: In situ bioreduction of technetium and uranium in a nitrate-contaminated aquifer, *Environ. Sci. Technol.*, 38, 468-475, 10.1021/es034639p, 2004.
- Kellogg, D. Q., Gold, A. J., Groffman, P. M., Addy, K., Stolt, M. H., and Blazejewski, G.: In situ ground water denitrification in stratified, permeable soils underlying riparian wetlands, *J. Environ. Qual.*, 34, 524-533, 2005.
- 1045
- Kim, Y., Istok, J. D., and Semprini, L.: Push-pull tests for assessing in situ aerobic cometabolism, *Ground Water*, 42, 329-337, 10.1111/j.1745-6584.2004.tb02681.x, 2004.
- Kim, Y., Kim, J. H., Son, B. H., and Oa, S. W.: A single well push-pull test method for in situ determination of denitrification rates in a nitrate-contaminated groundwater aquifer, *Water Sci. Technol.*, 52, 77-86, 2005.
- 1050
- Kneeshaw, T. A., McGuire, J. T., Smith, E. W., and Cozzarelli, I. M.: Evaluation of sulfate reduction at experimentally induced mixing interfaces using small-scale push-pull tests in an aquifer-wetland system, *Applied Geochemistry*, 22, 2618-2629, 10.1016/j.apgeochem.2007.06.006, 2007.
- 1055
- Kölbelboelke, J., Anders, E. M., and Nehrkorn, A.: Microbial communities in the saturated groundwater environment .2. Diversity of bacterial communities in a Pleistocene sand aquifer and their invitro activities, *Microb. Ecol.*, 16, 31-48, 10.1007/bf02097403, 1988.
- 1060 Kölle, W., Strelbel, O., and Böttcher, J.: Formation of sulfate by microbial denitrification in a reducing aquifer, *Water Supply*, 3, 35-40, 1985.
- Kollmann, W.: Die Bestimmung des durchflußwirksamen Porenvolumens von Sedimenten und seine Bedeutung für den Grundwasserschutz, *Mitt. österr. geol. Ges.*, 79, 14, 1986.

- 1065 Konrad, C.: Methoden zur Bestimmung des Umsatzes von Stickstoff für drei pleistozäne Grundwasserleiter Norddeutschlands, PhD Thesis, Univ. of Tech. Dresden, Dresden, Germany, 161 pp., 2007.
- Korom, S. F.: Natural denitrification in the saturated zone - a review, *Water Resources Research*, 28, 1657-1668, 1992.
- 1070 [Korom, S. F., Schlag, A. J., Schuh, W. M., and Schlag, A. K.: In situ mesocosms: denitrification in the Elk Valley aquifer, *Ground Water Monit. R.*, 25, 79–89, 2005.](#)
- [Korom, S. F., Schuh, W. M., Tesfay, T., and Spencer, E. J.: Aquifer denitrification and in situ mesocosms: modeling electron donor contributions and measuring rates, *J. Hydrol.*, 432/433, 112–126, doi:10.1016/j.jhydrol.2012.02.023, 2012.](#)
- 1075 Law, G. T. W., Geissler, A., Boothman, C., Burke, I. T., Livens, F. R., Lloyd, J. R., and Morris, K.: Role of Nitrate in Conditioning Aquifer Sediments for Technetium Bioreduction, *Environ. Sci. Technol.*, 44, 150-155, 10.1021/es9010866, 2010.
- McGuire, J. T., Long, D. T., Klug, M. J., Haack, S. K., and Hyndman, D. W.: Evaluating behavior of oxygen, nitrate, and sulfate during recharge and quantifying reduction rates in a contaminated aquifer, *Environ. Sci. Technol.*, 36, 2693-2700, 10.1021/es015615q, 2002.
- 1080 [McMahon, P. B., Bohlke, J. K., and Christenson, S. C.: Geochemistry, radiocarbon ages, and paleorecharge conditions along a transect in the Central High Plains aquifer, Southwestern Kansas, USA, *Appl. Geochem.*, 19, 1655–1686, doi:10.1016/j.apgeochem.2004.05.003, 2004.](#)
- 1085 Rivett, M. O., Buss, S. R., Morgan, P., Smith, J. W. N., and Bemment, C. D.: Nitrate attenuation in groundwater: A review of biogeochemical controlling processes, *Water Res.*, 42, 4215-4232, 10.1016/j.watres.2008.07.020, 2008.
- 1090 Sanchez-Perez, J. M., Bouey, C., Sauvage, S., Teissier, S., Antiguada, I., and Vervier, P.: A standardised method for measuring in situ denitrification in shallow aquifers: numerical validation and measurements in riparian wetlands, *Hydrol. Earth Syst. Sci.*, 7, 87-96, 2003.

- 1095 Santoro, A. E., Boehm, A. B., and Francis, C. A.: Denitrifier community composition along a nitrate and salinity gradient in a coastal aquifer, *Appl. Environ. Microbiol.*, 72, 2102-2109, 10.1128/aem.72.3.2102-2109.2006, 2006.
- 1100 Schroth, M. H., Kleikemper, J., Bolliger, C., Bernasconi, S. M., and Zeyer, J.: In situ assessment of microbial sulfate reduction in a petroleum-contaminated aquifer using push-pull tests and stable sulfur isotope analyses, *J. Contam. Hydrol.*, 51, 179-195, 2001.
- Schuchert, A.: Zielflächenidentifikation für Grundwasserschutzmaßnahmen. Eine GIS-Datenanalyse im Wasserschutzgebiet Großenkneten, Landkreis Oldenburg, Diploma thesis, Institute for Geography, University of Bremen, Germany, 2007.
- 1105 Seitzinger, S., Harrison, J. A., Bohlke, J. K., Bouwman, A. F., Lowrance, R., Peterson, B., Tobias, C., and Van Drecht, G.: Denitrification across landscapes and waterscapes: A synthesis, *Ecol. Appl.*, 16, 2064-2090, 2006.
- Senko, J. M., Istok, J. D., Sufliya, J. M., and Krumholz, L. R.: In-situ evidence for uranium immobilization and remobilization, *Environ. Sci. Technol.*, 36, 1491-1496, 10.1021/es011240x, 2002.
- 1110 Strebel, O., Böttcher, J., and Duijnisveld, W. H. M.: Identifizierung und Quantifizierung von Stoffumsetzungen in einem Sand-Aquifer (Beispiel Fuhrberger Feld). DVGW Schriftenreihe Wasser, 73, 55-73, 1992.
- [Tesoriero, A. J. and Puckett, L. J.: O₂ reduction and denitrification rates in shallow aquifers, *Water Resour. Res.*, 47, W12522, doi:10.1029/2011wr010471, 2011.](#)
- 1115 Trudell, M. R., Gillham, R. W., and Cherry, J. A.: An insitu study of the occurrence and rate of denitrification in a shallow unconfined sand aquifer, *J. Hydrol.*, 83, 251-268, 1986.
- van Berk, W., Kübeck, C., Steding, T., van Straaten, L., and Wilde, S.: Vorstudie zur Hydrogeologie im Wassergewinnungsgebiet Großenkneten., 55 S., 2005.
- 1120 Vitousek, P. M., Aber, J. D., Howarth, R. W., Likens, G. E., Matson, P. A., Schindler, D. W., Schlesinger, W. H., and Tilman, G. D.: Human alteration of the global nitrogen cycle: Sources and consequences, *Ecol. Appl.*, 7, 737-750, 1997.

- von der Heide, C., Bottcher, J., Deurer, M., Weymann, D., Well, R., and Duijnisveld, W. H. M.: Spatial variability of N₂O concentrations and of denitrification-related factors in the surficial groundwater of a catchment in Northern Germany, *J. Hydrol.*, 360, 230-241, 10.1016/j.jhydrol.2008.07.034, 2008.
- 1125
- Weiss, R. F.: Solubility of nitrogen, oxygen and argon in water and seawater, *Deep-Sea Research*, 17, 721-&, 1970.
- Weiss, R. F., and Price, B. A.: Nitrous-oxide solubility in water and seawater, *Mar. Chem.*, 8, 347-359, 1980.
- 1130 Well, R., Becker, K. W., Langel, R., Meyer, B., and Reineking, A.: Continuous flow equilibration for mass spectrometric analysis of dinitrogen emissions, *Soil Sci. Soc. Am. J.*, 62, 906-910, 1998.
- Well, R., and Myrold, D. D.: Laboratory evaluation of a new method for in situ measurement of denitrification in water-saturated soils, *Soil Biology & Biochemistry*, 31, 1109-1119, 1999.
- 1135
- Well, R., and Myrold, D. D.: A proposed method for measuring subsoil denitrification in situ, *Soil Sci. Soc. Am. J.*, 66, 507-518, 2002.
- Well, R., Augustin, J., Meyer, K., and Myrold, D. D.: Comparison of field and laboratory measurement of denitrification and N₂O production in the saturated zone of hydromorphic soils, *Soil Biology & Biochemistry*, 35, 783-799, 10.1016/s0038-0717(03)00106-8, 2003.
- 1140
- Well, R., Höper, H., Mehranfar, O., and Meyer, K.: Denitrification in the saturated zone of hydromorphic soils-laboratory measurement, regulating factors and stochastic modeling, *Soil Biology & Biochemistry*, 37, 1822-1836, 10.1016/j.soilbio.2005.02.014, 2005.
- 1145
- Well, R., Eschenbach, W., Flessa, H., von der Heide, C., and Weymann, D.: Are dual isotope and isotopomer ratios of N₂O useful indicators for N₂O turnover during denitrification in nitrate-contaminated aquifers?, *Geochim. Cosmochim. Acta*, 90, 265-282, 10.1016/j.gca.2012.04.045, 2012.
- 1150 Wessolek, G., Renger, M., Strebel, O., and Sponagel, H.: Einfluß von Boden und Grundwasserflurabstand auf die jährliche Grundwasserneubildung unter Acker,

Grünland und Nadelwald., Z. f. Kulturtechnik und Flurbereinigung, 26, 130-137, 1985.

1155 Weymann, D., Well, R., Flessa, H., von der Heide, C., Deurer, M., Meyer, K., Konrad, C., and Walther, W.: Groundwater N₂O emission factors of nitrate-contaminated aquifers as derived from denitrification progress and N₂O accumulation, Biogeosciences, 5, 1215-1226, 2008.

1160 Weymann, D., Geistlinger, H., Well, R., von der Heide, C., and Flessa, H.: Kinetics of N₂O production and reduction in a nitrate-contaminated aquifer inferred from laboratory incubation experiments, Biogeosciences, 7, 1953-1972, 10.5194/bg-7-1953-2010, 2010.

1165 Wirth, K.: Hydrogeologisches Gutachten zur Bemessung und Gliederung der Trinkwasserschutzgebiete für die Fassungen Hagel, Sage und Baumweg, Wasserwerk Großenkneten (OOWV). Beratungsbüro für Hydrogeologie (Hrsg.), Göttingen, Germany, 18 S., 1990.

1170

Tables:

Table 1. Overview of the conducted push-pull ¹⁵N tracer tests, the used wells and the depth range of the respective filter screens in both aquifers. Push-pull test with and without pre-conditioning were conducted at multilevel well B4 in 7, 8, 9 and 10 m below soil surface.

	Fuhrberg					Großenkneten					
	(multilevel wells)					(conventional monitoring and multilevel wells)					

Monitoring well	B1	B2	B4	B6	N10	Gro	Gro	S1	S2	CMT	CMT2
						326	327			1	

filter screen m below soil ground surface

non-sulphidic zone	2.95- <u>3.05</u>			3		8.0- <u>10.0</u>					8.15- <u>8.40</u>
(NO ₃ ⁻ -bearing zone)	4.15- <u>4.25</u>			6							22.65- <u>22.90</u>
Transition zone	7.95- <u>8.05</u>				5						
(NO ₃ ⁻ -bearing zone)	8.95- <u>9.05</u>										
	9.95- <u>10.05</u>				8						
Sulphidic zone	6.95- <u>7.05</u>	13.95- <u>14.05</u>	6.95- <u>7.05*</u>				35.0- <u>39.0</u>	66.0- <u>67.0</u>	26.0- <u>27.0</u>		26.65- <u>26.90</u>
(NO ₃ ⁻ -free zone)	7.95- <u>8.05</u>		8.75- <u>8.85*</u>								29.15- <u>29.40</u>
			9.85- <u>9.95*</u>								31.15- <u>31.40</u>
			9.95- <u>10.05*</u>								33.35- <u>33.60</u>

* Push-pull tests with pre-conditioning.

Table 2. Background conditions of the groundwater at-from the injection depths of the locations of push-pull ¹⁵N tracer tests.

Location	inj.	aquifer zone	O ₂	N ₂ O	SO ₄ ²⁻	pH	redox	con ^b
----------	------	--------------	----------------	------------------	-------------------------------	----	-------	------------------

1175

	depth ^a		NO ₃ ⁻					mV	μS cm ⁻¹
	m		mg L ⁻¹	mg N L ⁻¹	μg N L ⁻¹	mg S L ⁻¹			
FFA B1	<u>6.95-7.05</u>	sulphidic	0.67	< 0.25	n.d.	27.64	6.00	-171	473
FFA B1	<u>7.95-8.05</u>	sulphidic	0.76	< 0.25	n.d.	24.73	6.04	-175	440
FFA B2	<u>2.95-3.05</u>	non-sulphidic	3.66	41.47	1.59	15.07	4.66	273	563
FFA B2	<u>4.15-4.25</u>	non-sulphidic	0.96	27.59	68.31	36.94	4.83	209	564
FFA B2	<u>7.95-8.05</u>	transition zone	0.16	12.58	0.03	32.52	4.48	341	553
FFA B2	<u>8.95-9.05</u>	transition zone	0.13	7.09	0.05	38.41	4.65	367	488
FFA B2	<u>9.95-10.05</u>	transition zone	0.06	1.0	n.d.	43.30	4.75	374	458
FFA B2	<u>13.95-14.05</u>	sulphidic	0.40	0.63	n.d.	42.51	6.75	117	453
FFA B4	<u>7.95-8.05</u>	sulphidic	0.22	< 0.25	1.14	42.30	5.28	-38	432
FFA B4	<u>8.95-9.05</u>	sulphidic	0.12	< 0.25	0.70	51.19	5.43	-	-
FFA B6	<u>2.95-3.05</u>	non-sulphidic	9.51	6.10	0.02	13.95	5.70	365	255
FFA B6	<u>5.95-6.05</u>	non-sulphidic	1.28	19.55	10.66	22.45	5.18	349	441
FFA N10	<u>4.95-5.05</u>	transition zone	0.12	13.12	184.8	59.87	4.61	341	660
FFA N10	<u>7.95-8.05</u>	transition zone	0.16	0.4	1.03	52.03	5.60	3	463
GKA 326	<u>8.0-10.0</u>	non-sulphidic	6.30	3.06	0.12	4.67	4.10	374	105
GKA CMT2	<u>8.15-8.40</u>	non-sulphidic	6.10	3.14	0.12	5.06	4.40	387	100
GKA CMT2	<u>22.65-22.90</u>	non-sulphidic	5.70	3.98	0.56	12.09	5.10	276	163
GKA CMT2	<u>26.65-26.90</u>	sulphidic	0.10	< 0.25	0.01	18.57	5.40	30	221
GKA S2	<u>26.0-27.0</u>	sulphidic	0.30	< 0.25	n.d.	17.85	5.30	161	217
GKA CMT1	<u>29.15-29.40</u>	sulphidic	0.20	< 0.25	n.d.	18.16	5.50	-24	240
GKA CMT1	<u>31.15-31.40</u>	sulphidic	0.14	< 0.25	n.d.	17.91	5.20	134	195
GKA CMT1	<u>33.35-33.60</u>	sulphidic	0.20	< 0.25	n.d.	18.60	5.10	122	272
GKA 327	<u>35.0-39.0</u>	sulphidic	0.10	< 0.25	0.13	10.85	5.30	26	275
GKA S1	<u>66.0-67.0</u>	non-sulphidic	0.13	< 0.25	0.02	5.10	5.72	-54	103

FFA Fuhrberger Feld aquifer;

GKA Großenkneten aquifer;

^a injection depth (the absolute depth can vary by a few cm);

^b conductivity.

1180

Table 3. In situ denitrification rates (D_r (in situ)) and minimum and maximum values of D_r (in situ) in dependence of the range of estimated effective porosities (0.2 to 0.4). D_r (in situ) were calculated from a regression line through the $(N_2+N_2O)_{den}$ concentrations at time intervals with the steepest increase of $(N_2+N_2O)_{den}$ during the respective push-pull test. Tracer tests after pre-conditioning are marked with *.

Location	Injection depth ^a	Aquifer zone	$D_r(\text{in situ})$		$R^a R^b$	
			Max	min		
			$\mu\text{g N kg}^{-1} \text{d}^{-1}$			
FFA B1	<u>6.95-7.05</u>	sulphidic ^{ed}	17.59	27.361	10.261	0.94
FFA B1	<u>7.95-8.05</u>	sulphidic ^{ed}	1.512	2.352	0.882	0.92
FFA B2	<u>2.95-3.05</u>	non-sulphidic ^{bc}	0.120	0.186	0.070	0.14
FFA B2	<u>4.15-4.25</u>	non-sulphidic ^{bc}	0.065	0.102	0.038	0.01
FFA B2	<u>7.95-8.05</u>	transition zone ^{bc}	0.429	0.667	0.250	0.95
FFA B2	<u>8.95-9.05</u>	transition zone ^{bc}	1.415	2.201	0.825	0.90
FFA B2	<u>9.95-10.05</u>	transition zone ^{bc}	8.650	13.456	5.046	0.99
FFA B2	<u>13.95-14.05</u>	sulphidic ^{ed}	51.47	80.078	30.029	0.82
FFA B4	<u>7.95-8.05</u>	sulphidic ^{ed}	2.755	4.286	1.607	0.98
FFA B4	<u>8.95-9.05</u>	sulphidic ^{ed}	2.278	3.544	1.329	0.86
FFA B6	<u>2.95-3.05</u>	non-sulphidic ^{bc}	0.057	0.089	0.033	0.02
FFA B6	<u>5.95-6.05</u>	non-sulphidic ^{bc}	4.998	7.774	2.915	0.96
FFA N10	<u>4.95-5.05</u>	transition zone ^{bc}	12.89	20.052	7.520	0.95
FFA N10	<u>7.95-8.05</u>	transition zone ^{bc}	23.19	36.074	13.528	0.99
FFA B4*	<u>6.95-7.05</u>	sulphidic ^{ed}	152.6	237.527	89.073	0.94
FFA B4*	<u>7.95-8.05</u>	sulphidic ^{ed}	67.83	105.514	39.568	0.99
FFA B4*	<u>8.95-9.05</u>	sulphidic ^{ed}	145.5	226.481	84.930	0.98
FFA B4*	<u>9.95-10.05</u>	sulphidic ^{ed}	150.7	234.530	87.949	1.00
GKA 326	<u>8.0-10.0</u>	non-sulphidic ^b	0.747	1.162	0.436	0.96
GKA CMT2	<u>8.15-8.40</u>	non-sulphidic ^b	0.051	0.079	0.030	0.02
GKA CMT2	<u>22.65-22.90</u>	non-sulphidic ^b	0.009	0.013	0.005	0.00
GKA CMT2	<u>26.65-26.90</u>	sulphidic ^{ed}	1.233	1.918	0.719	0.70
GKA S2	<u>26.0-27.0</u>	sulphidic ^{ed}	0.860	1.338	0.502	0.99
GKA CMT1	<u>29.15-29.40</u>	sulphidic ^{ed}	4.427	6.886	2.582	0.78
GKA CMT1	<u>31.15-31.40</u>	sulphidic ^{ed}	0.504	0.784	0.294	0.63
GKA CMT1	<u>33.35-33.60</u>	sulphidic ^{ed}	2.002	3.114	1.168	0.77
GKA 327	<u>35.0-39.0</u>	sulphidic ^{ed}	6.192	9.632	3.612	0.99
GKA S1	<u>66.0-67.0</u>	non-sulphidic ^{ed}	2.271	3.533	1.325	1.00

FFA Fuhrberger Feld aquifer; GKA Großenkneten aquifer; ^a(the absolute depth can vary by a few cm), ^{a, b} correlation coefficient of the regression line;

- ^{b, c}-NO₃⁻-bearing zone; ^{f, d}-NO₃⁻-free zone.

1185

Table 4. Means, standard deviation and ranges of $D_r(\text{in situ})$ of the data sets. Statistical significant differences (kw: $P < 0.05$) between $D_r(\text{in situ})$ values measured in the various ~~data subsets~~ ~~sub data sets~~ occurred only between $D_r(\text{in situ})$ measured in the non-sulphidic zone and some other partial data sets.

Data set	$D_r(\text{in situ})^a$ ($\mu\text{g kg}^{-1} \text{N d}^{-1}$)				$D_r(\text{in situ}) / D_r(365)^b$		
	N^c	means	range	non-sulphidic ^d	N^e	means	Range
Whole data set	24	6.07±11.36	0.00 – 51.48	s ¹	34	0.15±0.20	0.00 – 0.60
FFA	14	9.10±14.20	0.06 – 51.48	s ¹	16	0.26±0.24	0.01 – 0.60
GKA	10	1.83±2.02	0.00 – 6.19	Ns	18	0.06±0.06	0.00 – 0.20
non-sulphidic zone	8	1.04± 1.78	0.00 – 5.00	-	11	0.05±0.08	0.00 – 0.23
sulphidic zone	14	8.59±13.67	0.43 – 51.48	s ²	23	0.20±0.22	0.01 – 0.60
transition zone	5	9.32±9.32	0.43 – 23.19	s ¹	8	0.47±0.14	0.25 – 0.60
NO ₃ ⁻ -bearing zone	12	4.38±7.24	0.00 – 23.19	Ns	17	0.23±0.24	0.00 – 0.60
NO ₃ ⁻ -free zone	16	7.76±14.53	0.50 – 51.48	s ¹	17	0.10±0.10	0.01 – 0.37
B4 pre-conditioned	4	128.1±43.4	67.8 – 152.7	-	4	1.87±0.84	0.72 – 2.76
B4 un-conditioned	2	2.52±0.34	2.28 – 2.76	-	2	0.04±0.02	0.02 – 0.05

^a all $D_r(\text{in situ})$ measurements, ^b only $D_r(\text{in situ})$ measurements with corresponding incubated aquifer samples ^c number of $D_r(\text{in situ})$ measurements; ^d statistical differences between non-sulphidic and other data sets (s significant differences; ns not significant differences; ¹ differences significant at the 0.05 probability level; ² differences significant at the probability level; ³ differences significant at the 0.001 probability level); ^e number of comparisons between $D_r(\text{in situ})$ and corresponding incubated aquifer samples.

1190

1195

Table 5. Simple regressions between $D_r(\text{in situ})$ and $D_{\text{cum}}(365)$ and SRC from anaerobic incubations with corresponding aquifer material. $f^{B-C}(X) = A + B \times f^{B-C}(D_r(\text{in situ}))$.

calculated/measured	Deviation
---------------------	-----------

Data set	X ^a	N ^b	A	B	R ^c	(mg N kg ⁻¹ yr ⁻¹)			
						mean	range	mean	range
Whole data set	<i>D</i> _{cum} (365)	34	2.878	0.603	0.62	2.29±4.19	0.16 – 22.96	-3.07±14.67	-47.2 – 12.8
Whole data set	SRC	34	6.123	0.152	0.40	1.51±1.31	0.12 – 5.19	-671.2±2091	-7734 – 1379
FFA	<i>D</i> _{cum} (365)	16	2.640	0.578	0.52	2.83±4.90	0.13 – 19.18	-3.08±14.71	-49.1 – 7.0
FFA	SRC	16	3.772	0.006	0.07	1.22±0.82	0.11 – 2.92	-377.8±1375	-5317 – 413.7
GKA	<i>D</i> _{cum} (365)	18	3.046	0.818	0.82	1.34±0.92	0.26 – 3.85	-2.25±12.28	-30.8 – 15.5
GKA	SRC	18	8.024	0.613	0.75	1.43±1.23	0.178 – 4.47	-617.0±2179	-5780 – 2390
non-sulphidic	<i>D</i> _{cum} (365)	11	1.050	0.156	0.40	2.25±3.20	0.26 – 10.65	-0.10±2.41	-5.2 – 1.8
non-sulphidic	SRC	11	8407	752.8	0.43	1.50±0.84	0.46 – 3.19	31.54±240.7	-553 – 272.6
sulphidic	<i>D</i> _{cum} (365)	23	4.185	-0.033	0.04	1.33±0.90	0.30 – 4.19	-3.32±15.13	-39.4 – 13.1
sulphidic	SRC	23	21.40	-1.372	0.41	0.30±0.18	0.03 – 0.61	-1823±2313	-8564 – -144
transition zone	<i>D</i> _{cum} (365)	8	1.109	0.581	0.53	1.03±0.26	0.74 – 1.43	-0.36±2.84	-4.5 – 3.3
transition zone	SRC	8	5.349	-0.602	0.77	1.05±0.41	0.58 – 1.92	-50.11±340.6	-518.7 – 561
NO ₃ ⁻ -bearing	<i>D</i> _{cum} (365)	17	2.132	0.454	0.84	2.21±3.76	0.13 – 15.17	-0.67±2.52	-6.3 – 2.7
NO ₃ ⁻ -bearing	SRC	17	193.3	16.32	0.55	1.36±0.75	0.41 – 2.76	-19.35±365.2	-929 – 462.6
NO ₃ ⁻ -free	<i>D</i> _{cum} (365)	17	7.774	2.036	0.36	1.47±0.88	0.31 – 3.00	-1.69±16.23	-38.7 – 18.1
NO ₃ ⁻ -free	SRC	17	77.61	8.421	0.21	1.78±1.46	0.27 – 4.47	-485.4±2494	-6077 – 2095
pre-conditioned ¹	<i>D</i> _{cum} (365)	4	14.402	0.099	0.54	1.06±0.35	0.62 – 1.47	0.12±9.49.79	-12.95 – 9.41
pre-conditioned ¹	SRC	4	319.5	4.895	0.53	1.12±0.52	0.51 – 1.77	5.5±462	-638.0 – 464

¹ experimental data of pre-conditioned push-pull tracer tests was not Box-Cox transformed before regression analysis, because of the small number of data pairs. For these data pairs the following equation applies: $X = A + B \times D_i$ (in situ).

^a Independent sediment parameter

^b number of samples

^c correlation coefficient.

1200

Figure captions:

Fig. 1. Schematic of push-pull ^{15}N tracer tests at groundwater monitoring and multilevel wells.


Fig. 2. Time courses of denitrification derived $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ and dissolved O_2 during ^{15}N push-pull tests in the FFA (**A** and **C**) and GKA (**B** and **D**). FFA = Fuhrberger Feld aquifer; GKA = Großenkneten aquifer; ns non-sulphidic; s sulphidic and tZ transition zone aquifer material.

Fig. 3. Relation between in situ denitrification rates determined by ^{15}N push-pull tracer tests and average denitrification rates during one year of incubation (Eschenbach and Well, 2013). FFA Fuhrberger Feld aquifer; GKA Großenkneten aquifer; ns non-sulphidic; s sulphidic and tZ transition zone aquifer material.

Fig. 4. Time courses of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ during push-pull tests without pre-conditioning (**A**) (grey diamonds) and with pre-conditioning **B** (black diamonds) at multilevel well B4 in the FFA. The push-pull tests without pre-conditioning at B4 was conducted in April 2010. One year later in April 2011 the aquifer material of the respective depths was conditioned over 5 weeks with NO_3^- amended groundwater of natural ^{15}N abundance prior to the ^{15}N push-pull tests.

Fig. 5. D_r (in situ) after 5 weeks of pre-conditioning of aquifer material (black diamonds) in comparison to D_r (in situ) without pre-conditioning. The small diagram shows the difference between D_r (in situ) after pre-conditioning and unconditioned D_r (in situ) at multilevel well B4 in the FFA.

1205 **Fig. 6.** Schematic time courses of denitrification during push-pull tests in the NO_3^- -free groundwater zone. (D_r = measured in situ denitrification rates, saRC = surface area of reduced compounds present in the ~~testet~~ investigated aquifer.)

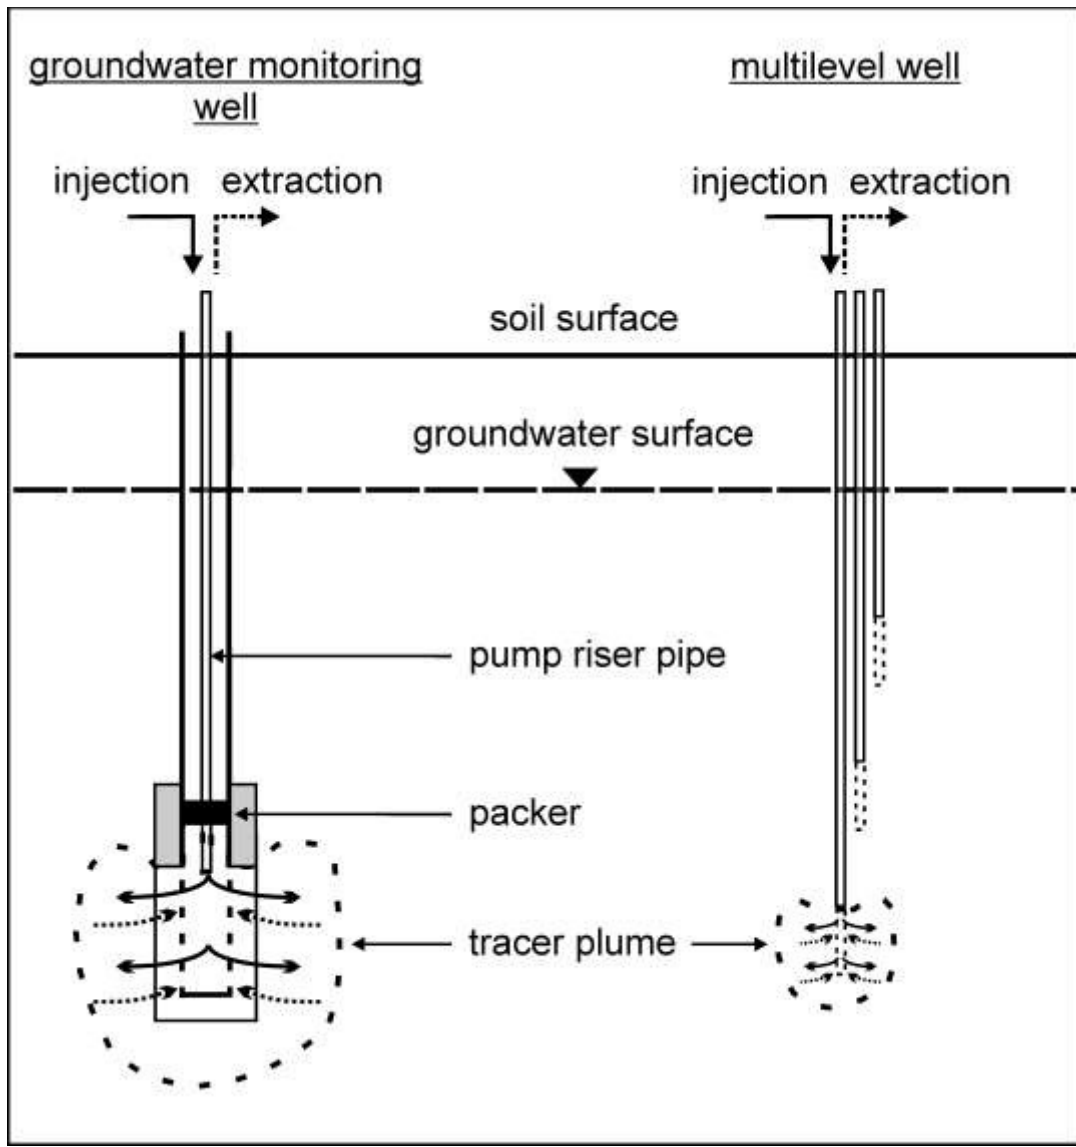

1210

Fig. 1.

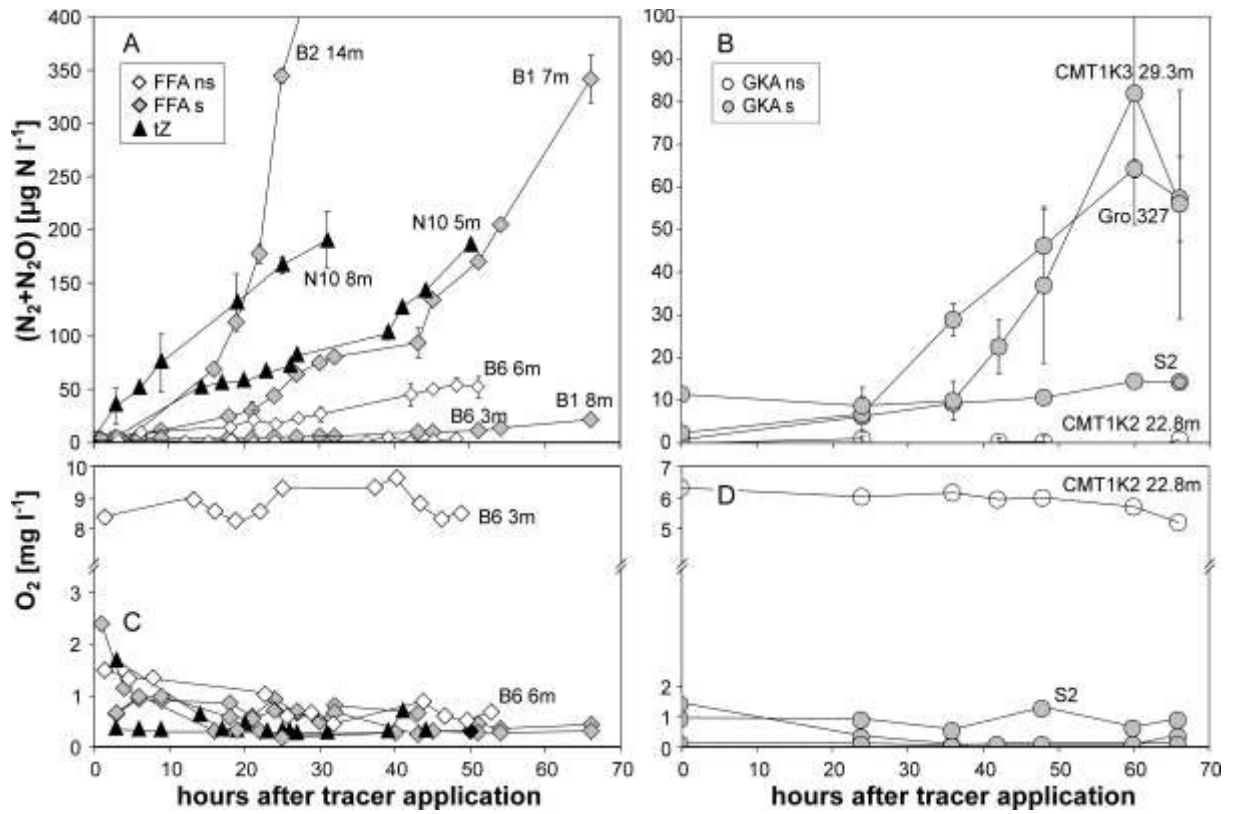


Fig. 2.

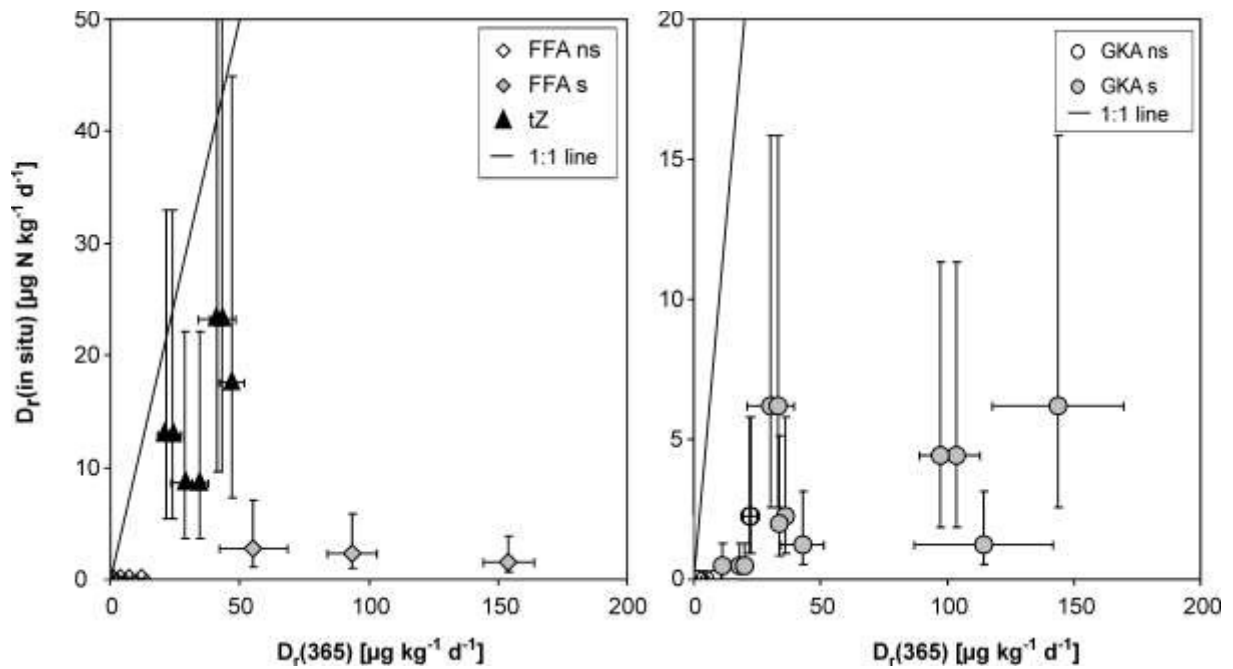


Fig. 3.

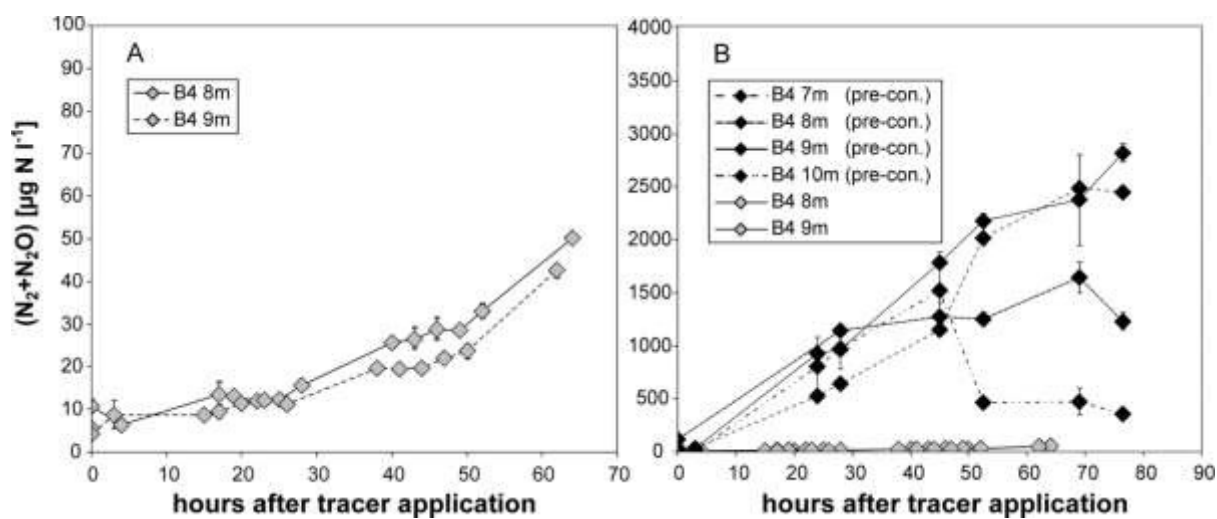


Fig. 4.


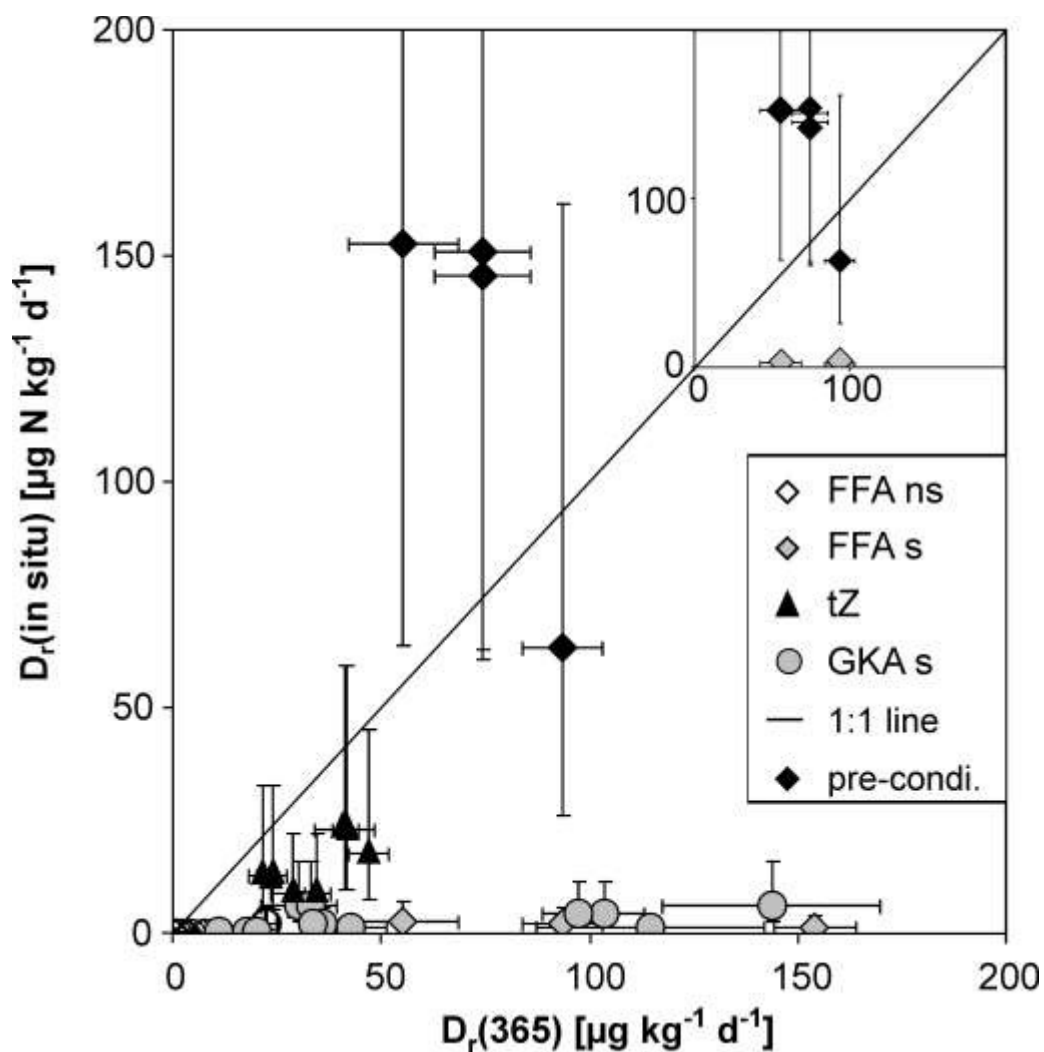


Fig. 5.

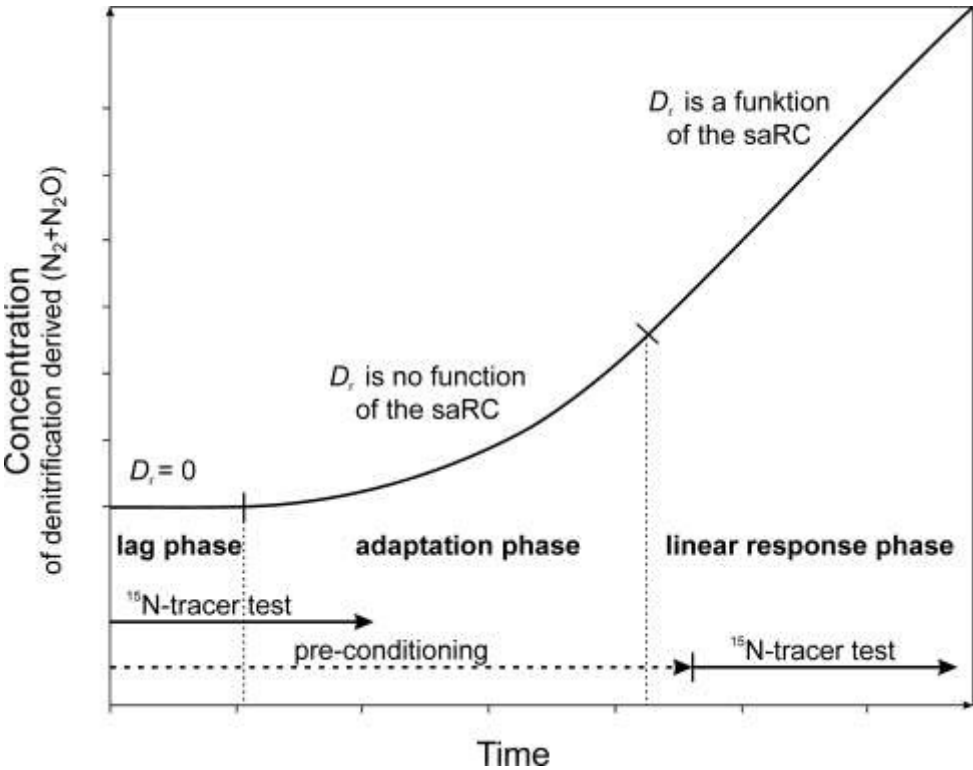

1220

Fig. 6.

Supplementing information for:

Predicting the denitrification capacity of sandy aquifers from in situ measurements using push-pull ^{15}N tracer tests

5

10

15

20

25

30

35

40

45

50

S1 In situ isotope analysis using MIMS

55 At two multilevel wells in the Fuhrberger Feld aquifer (FFA) (multilevel well B1 and B2) the concentration of ^{15}N labelled denitrification products in the sampled tracer solution was measured during the conducted push-pull tests directly in the field, using a membrane inlet mass spectrometer (MIMS) as described in Eschenbach and Well (2011). These measurements were done to compare online field MIMS measurements with the offline
60 laboratory analysis by isotope ratio mass spectrometry (IRMS) as described in section 2.5.1. The instrumental set up was similar to the laboratory setup described in Eschenbach and Well (2011) and installed inside a van. Briefly, it consisted of the quadrupole mass spectrometer a cryotrap, a membrane inlet, a cryostatic water bath, 2 peristaltic pumps, a reduction furnace and a T-connection.

65 After injection of tracer solution into the respective depths of the monitoring wells, samples of the tracer solution were extracted using a peristaltic pump (masterflex COLE-Parmer, Vernon Hills, USA) (see section 2.2). A subsample of the sampled tracer solution was then pumped through a T-connection using a second peristaltic pump (ISMATEC, BVP-Standard, Wertheim-Mondfeld, Germany). The T-connection was directly connected via stainless steel
70 tubing with the membrane inlet of the mass spectrometer (described in detail in Eschenbach and Well (2011)). The dissolved gasses in the sampled tracer solution diffused in the membrane inlet through the gas permeable membrane into the high vacuum of the mass spectrometer. A copper reduction furnace and a cryotrap were placed in the vacuum line between membrane inlet and the ion source of the mass spectrometer. N_2O was reduced to N_2
75 within the reduction furnace. Therefore ^{15}N labelled denitrification derived N_2 and N_2O was analyzed as $(\text{N}_2+\text{N}_2\text{O})$ on the molecular ion masses 28, 29 and 30 as $^{28}\text{N}_2$, $^{29}\text{N}_2$ and $^{30}\text{N}_2$. The cryotrap was filled with liquid N_2 in order to remove water vapour and CO_2 (see also Fig. 1 Analyser side, in Eschenbach and Well (2011)). The membrane inlet and a flask containing air-equilibrated standard water were placed within a cryostatic water bath (Thermo Haake,
80 HAAKE AG, Karlsruhe, Germany) to ensure constant membrane inlet, sample and air-equilibrated standard water temperatures. The air-equilibrated standard water was manufactured as described in Kana et al. (1994) and used to calibrate the MIMS.

5 push-pull tests (at multilevel well B1 and at B2, respectively) with parallel online MIMS measurements were conducted, in the depths of 7, 8 (B1) and 8, 9 and 10 m (B2) below soil
85 surface (Table 1). Overall, there were 58 pairs of IRMS and MIMS measurements. Both online field MIMS and offline laboratory IRMS measurement were in close agreement

(Fig. S1). The averaged concentrations of the sum of ^{15}N labelled denitrification derived N_2 and N_2O ($(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$) measured with both methods ranged from 0.9 to 99 and 0.3 to $16 \mu\text{g N l}^{-1}$, in samples from B1 and B2 respectively. Maximal differences between MIMS and IRMS measurements of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ were 6.6 and $2.5 \mu\text{g N l}^{-1}$ for samples from B1 and B2 respectively (Fig. S2).

The Bland-Altman-method for method comparison was used to evaluate the agreement of both methods (Bland and Altman, 1986) because correlation and regression analysis can result in the context of method comparison to significant misinterpretations (Altman and Bland, 1983; Bland and Altman, 2003, 1995, 1986). Denoting the results of the IRMS and MIMS measurement of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$, as $(\text{N}_2+\text{N}_2\text{O})_{\text{IRMS}}$ and $(\text{N}_2+\text{N}_2\text{O})_{\text{MIMS}}$, respectively. The differences between measurements of individual samples with both methods [$(\text{N}_2+\text{N}_2\text{O})_{\text{IRMS}} - (\text{N}_2+\text{N}_2\text{O})_{\text{MIMS}}$] were plotted against the average of both measurements [$(\text{N}_2+\text{N}_2\text{O})_{\text{IRMS}} + (\text{N}_2+\text{N}_2\text{O})_{\text{MIMS}}/2$] (Fig. S2). Furthermore the average of differences (\bar{d}), the 95 %-limits of method agreement and 95 %-confidence intervals were calculated as described in Bland and Altman (1986).

The distribution of the magnitude of differences in Figure S2 suggests that there is no substantial increase in variance between both methods with increasing magnitude of measurement, which is a prerequisite for the calculation of method bias and 95 %-limits of method agreement without the need of transforming the data. The average of differences (\bar{d}) of all parallel measurements (= estimated method bias) was rather small ($\bar{d} = 0.6 \mu\text{g N l}^{-1}$; Fig. S2). The 95 %-limits of method agreement calculated as described in Bland and Altman (1986) were $\bar{d} \pm 4 \mu\text{g N l}^{-1}$. This means that 95 % of observed differences are expected to fall within these limits. The confidence bands for (\bar{d}) and the 95 %-limits of method agreement are narrow (Fig. S2) with values of $\bar{d} \pm 0.46$ and 95 %-limits $\pm 0.8 \mu\text{g N l}^{-1}$, respectively, showing that sample size was sufficient for the calculation of relative precise values for the estimated method bias and estimated limits of method agreement.

The comparison of online field measurements using MIMS with laboratory offline measurements (IRMS) thus showed a good agreement between both methods (Figs. S1 and S2) with only minor bias under the experimental conditions such as those encountered during this study, i.e. were $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ was in the range of 0.9 to $99 \mu\text{g N l}^{-1}$ and ^{15}N abundances of denitrified NO_3^- were between 45 and 60 atom % ^{15}N . This close agreement is in line with our previous study where offline IRMS and online MIMS measurement were compared under laboratory conditions (Eschenbach and Well, 2011). This shows that in situ application does not alter the precision of the MIMS system.

In summary, the MIMS system was suitable for isotope analysis precise enough for the full range of measured concentrations, showing that this analytical system is suitable for in situ analysis during ^{15}N push pull tests. But still the correction for dilution of the injected tracer solution with ambient groundwater is necessary (see Sect. 2.6). Possibly this can be achieved with an additional inert gas like helium (He), which might be added to the tracer solution by stripping it with He before injection. Helium can then be measured online with the mass spectrometer. Or dilution correction might be achieved by the use of a tracer solution with a different salinity compared to the ambient groundwater.

The main advantages with respect to the conventional IRMS approach is that results can be obtained in the course of experiments directly in the field. Sampling intervals can thus be adapted to get more precise rates. Moreover, the length of the pull phase can be limited to the duration of clearly increasing $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ concentrations to save working time. Finally, the relatively low cost and simple handling of the MIMS system are favourable to enable extensive application of the ^{15}N push-pull approach to explore denitrification capacities of aquifers.


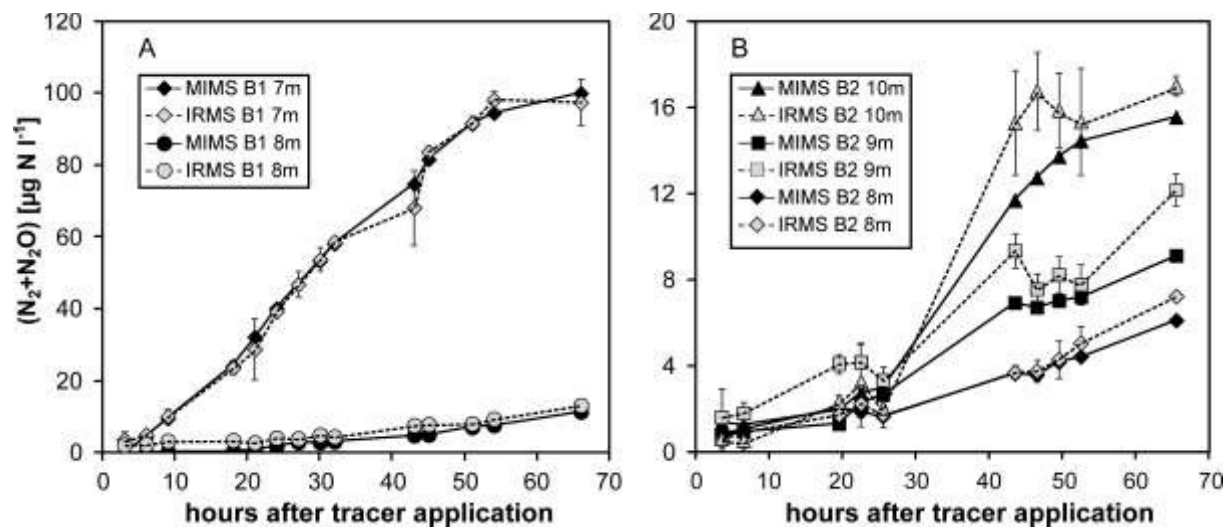


Fig. S1. Comparison of online field measurements of $(\text{N}_2+\text{N}_2\text{O})_{\text{den}}$ from aqueous samples, using a membrane inlet mass spectrometer (MIMS) with standard offline laboratory measurements by means of isotope ratio mass spectrometry (IRMS) at the multilevel wells B1 (A) and B2 (B) for 5 ^{15}N push-pull tracer tests in the Fuhrberger Feld Aquifer.

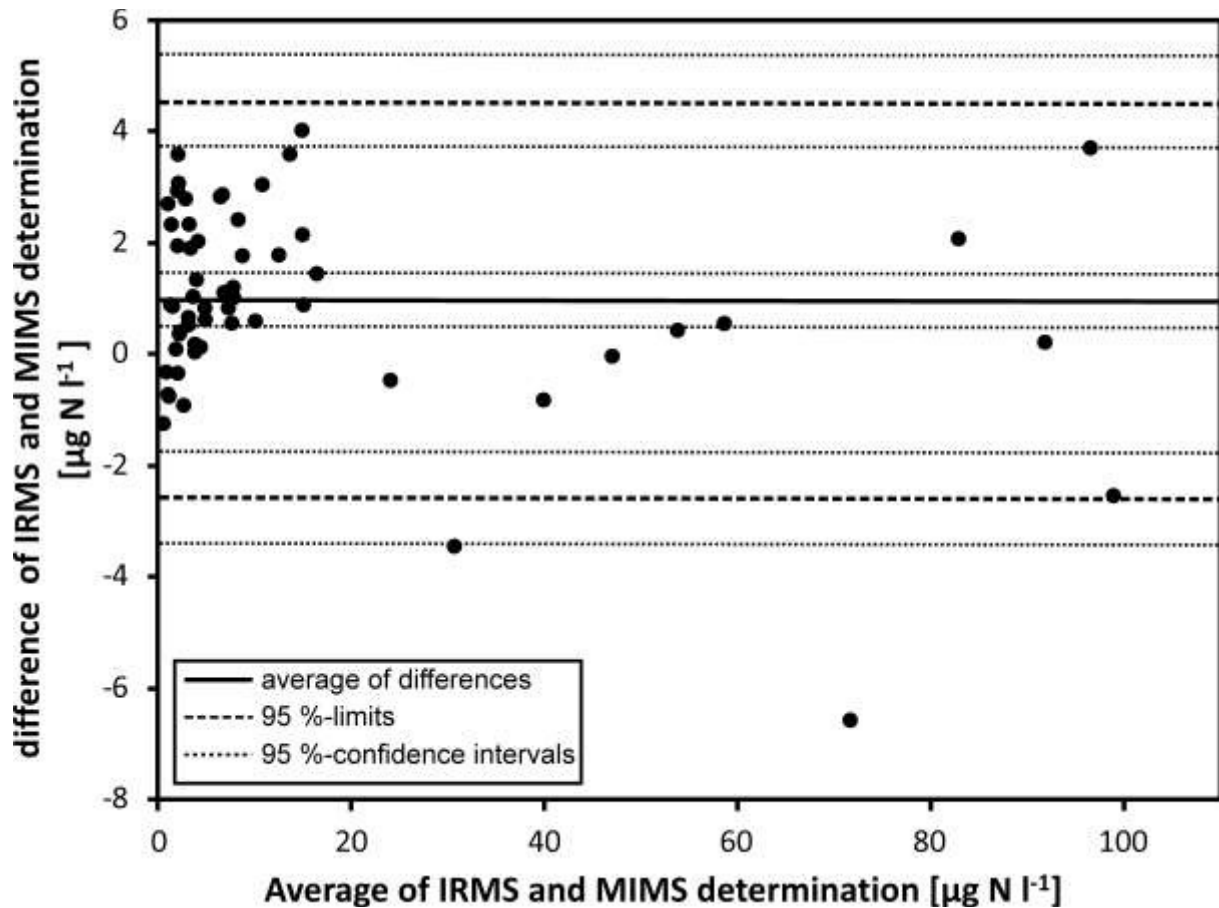

155 **Fig. S2.** Bland-Altman-Plot of the differences between online field MIMS analysis and offline laboratory IRMS measurement plotted against the average of both determinations.

S2 Possible confounding factors and uncertainties

160 Addy et al. (2002) discussed 3 potential confounding factors for the quantification of ^{15}N gas formation during push-pull tests: (i) dilution of denitrification derived gases, (ii) degassing of ^{15}N labelled denitrification derived gasses during the pull-phase of ^{15}N tracer tests (see therefore also discussion in Eschenbach and Well (2011)) and (iii) a lag phase between ^{15}N tracer injection and microbial response. In the following it is briefly referred to (iii).

165 Microbial adaptation processes after ^{15}N tracer injection might require time especially in the NO_3^- -free zone of aquifers (see Sect. 4.2), where aquifer material is brought into contact with NO_3^- for the first time. After pre-conditioning a clear lag phase was not observed during push-pull tests in the NO_3^- -free zone at multilevel well B4 in the FFA, therefore it is believed that this is attributed to the stimulation of denitrifiers due to the repeated injections of NO_3^- enriched groundwater at this multilevel well. Therefore, pre-conditioning might be a way to
 170 shorten or eliminate the observed lag phases between tracer injections and microbial response.

An additional uncertainty during push-pull tests (iv) is the effective porosity of investigated aquifer sediments. The effective porosity determines the volume of aquifer solids in reaction contact with 1 L test solution. Therefore, this value is needed to relate concentration data of evolved $(N_2+N_2O)_{den}$ from $(\mu\text{g N L}^{-1})$ to $(\mu\text{g N kg}^{-1})$. This conversion strongly increases the coefficient of variation (CV) of concentration measurements of $(N_2+N_2O)_{den}$ and thus increases the uncertainty of measured $D_r(\text{in situ})$ because of the uncertainty of the real effective porosity of the tested aquifer material (see Sect. 2.7). The effective porosity at the injection point can be measured with pumping tests prior or after the push-pull ^{15}N tracer test to reduce this source of uncertainty.

185

190

195

200

205

210

215

220

S 3. Additional detailed results from laboratory incubations and linear regression models

Table S1. Denitrification rates, cumulative denitrification, stock of reduced compounds, sulphate formation capacity and estimated minimal lifetime of denitrification of incubated samples from both aquifers (Eschenbach and Well, 2013) and corresponding in situ denitrification rates.

Sample location	Depth interval m	Aquifer zone ^a	$D_{cum}(365)^b$ mg N kg ⁻¹ yr ⁻¹	SRC ^c	SRC _C ^d	SRC _S ^e	SFC ^f mg S kg ⁻¹ yr ⁻¹	D _r (in situ)
								μg N kg ⁻¹ d ⁻¹
FFA B1	6.0-7.0	transition zone	17.18	659.6	599.5	60.1	6.1	17.59
FFA B1	7.0-8.0	sulphidic	56.24	5974.2	5552.7	421.5	39.4	1.51
FFA B2	2.0-3.0	non-sulphidic	0.19	240.8	220.7	20.1	0.1	0.12
FFA B2	3.0-4.0	non-sulphidic	0.37	215.4	189.2	26.3	-0.1	0.12
FFA B2	4.0-5.0	non-sulphidic	4.34	540.2	508.0	32.2	1.0	0.07
FFA B2	8.0-9.0	transition zone	10.53	1638.2	1515.5	122.7	3.5	8.65
FFA B2	9.0-10.0	transition zone	12.68	610.7	502.0	108.7	2.2	8.65
FFA B4	7.0-8.0	sulphidic	20.16	603.6	450.2	153.4	9.6	2.76
FFA B4	8.0-9.0	sulphidic	34.09	1289.5	1038.9	250.7	22.0	2.28
FFA B6	2.0-3.0	non-sulphidic	2.64	687.0	648.9	39.1	0.3	0.06
FFA B6	3.0-4.0	non-sulphidic	1.46	1017.4	976.5	40.9	0.1	0.06
FFA N10	4.5-5.0	transition zone	8.69	1239.0	1204.1	34.8	1.5	12.89
FFA N10	5.0-5.5	transition zone	8.75	721.6	687.1	34.5	2.1	12.89
FFA N10	5.5-6.0	transition zone	7.82	674.6	640.3	34.3	5.2	12.89
FFA N10	7.7-8.3	transition zone	15.04	329.5	290.0	39.5	1.5	23.19
FFA N10	8.3-8.6	transition zone	15.17	331.5	298.7	32.9	6.9	23.19
FFA N10	10.0-10.4	sulphidic	17.45	320.6	289.3	31.3	5.4	-
FFA N10	10.4-10.7	sulphidic	50.07	5571.6	5247.7	323.9	9.4	-
FFA N10	12.0-13.0	sulphidic	52.84	2771.3	2381.7	389.6	37.9	-
FFA N10	13.0-14.0	sulphidic	38.04	2134.1	1723.3	410.8	18.2	-
FFA N10	16.0-17.0	sulphidic	46.65	2744.7	2431.5	313.2	23.6	-
FFA N10	17.0-18.0	sulphidic	46.55	2642.7	2335.0	307.8	36.8	-
GKA	8.0-9.0	non-sulphidic	0.63	132.6	95.0	37.6	0.9	0.00
GKA	9.0-10.0	non-sulphidic	0.34	97.1	70.7	26.4	0.4	0.00
GKA	22.0-23.0	non-sulphidic	1.57	193.3	164.2	29.1	0.2	0.00
GKA	23.0-24.0	non-sulphidic	2.83	204.5	179.2	25.3	-0.0	0.00
GKA	25.9-27.0	sulphidic	15.63	2857.4	2381.0	476.4	1.2	1.23
GKA	27.0-28.3	sulphidic	41.82	6634.0	5943.2	690.8	8.3	1.23
GKA	28.3-29.3	sulphidic	37.82	4495.6	3878.5	617.2	13.8	4.43
GKA	29.3-30.3	sulphidic	35.49	4766.8	4236.0	530.8	8.1	4.43
GKA	30.3-31.2	sulphidic	6.54	1086.9	731.4	355.4	3.8	0.50
GKA	31.3-32.0	sulphidic	4.09	1122.4	777.7	344.7	5.0	0.50
GKA	32.9-33.7	sulphidic	7.28	1206.0	765.6	440.4	10.2	0.50
GKA	33.7-34.7	sulphidic	12.25	1057.4	700.9	356.6	17.7	2.00
GKA	35.7-36.7	sulphidic	52.46	8861.3	8366.7	494.6	30.0	6.19
GKA	36.7-37.7	sulphidic	11.07	689.6	216.7	472.8	9.2	6.19
GKA	37.7-38.7	sulphidic	12.06	1347.7	1083.1	264.7	4.6	6.19
GKA	65.1-65.4	sulphidic	13.22	1441.2	941.3	499.9	1.3	2.27
GKA	67.1-67.5	non-sulphidic	8.18	471.0	333.8	137.2	1.3	2.27
GKA	67.5-68.0	non-sulphidic	8.11	487.1	351.5	135.6	0.7	2.27

FFA Fuhrberger Feld aquifer; GKA Großenkneten aquifer; ^a sediment characteristic; ^b cumulative denitrification after one year of incubation; ^c stock of reactive compounds (SRC); ^d fraction of organic carbon in the SRC; ^e fraction of total-S in the SRC; ^f sulphate formation capacity (SFC).

Table S2. Lambda values of the Box-Cox transformed $D_r(\text{in situ})$ and variables measured during anaerobic incubation.

Data set	Lamda values		
	$D_r(\text{in situ})$	$D_{\text{cum}}(365)$	SRC
Whole data set	0.216	0.303	-0.024
FFA	0.214	0.369	-0.185
GKA	0.257	0.236	0.039
non-sulphidic zone	0.041	0.122	1.493
Sulphidic zone	0.190	0.260	0.229
transition zone	-0.150	-0.029	-0.159
NO_3^- -bearing	0.099	0.337	0.797
NO_3^- -free	0.319	0.670	0.492

Table S3. Simple regressions between $D_r(\text{in situ})$ and individual sediment parameters from aquifer parallels. $f^{B-C}(X) = A + B \times f^{B-C}(D_r(\text{in situ}))$. For each sub data set the two sediment parameters with the best correlation coefficient with $D_r(\text{in situ})$ are listed.

230

Data set	X^a	N^b	A	B	R^c	R^2
Whole data set	SO_4^{2-}	29	3.697	-0.564	0.58	0.33
Whole data set	C_{org}	34	5.516	0.134	0.40	0.16
FFA	C_{hws}	14	19.74	1.754	0.75	0.56
FFA	SO_4^{2-}	11	3.263	-0.472	0.72	0.52
GKA	total-S	18	92.88	17.51	0.75	0.56
GKA	C_{org}	18	5.612	0.324	0.69	0.48
non-sulphidic	total-S	11	5.128	0.150	0.62	0.38
non-sulphidic	C_{org}	11	680.1	51.58	0.42	0.18
sulphidic	total-S	23	543.2	-109.7	0.69	0.48
sulphidic	SO_4^{2-}	18	3.540	-0.614	0.49	0.24
transition zone	total-S	8	0.608	-0.001	0.60	0.36
transition zone	C_{org}	8	5.341	-0.601	0.73	0.53
NO_3^- -bearing	C_{org}	17	151.0	12.75	0.55	0.30
NO_3^- -bearing	SO_4^{2-}	14	5.612	-0.501	0.53	0.28
NO_3^- -free	SO_4^{2-}	15	3.085	-0.844	0.51	0.26
NO_3^- -free	C_1	14	34.51	5.418	0.29	0.08

^a Independent sediment parameter; ^b Sample number; ^c Correlation coefficient; SO_4^{2-} extractable sulphate-S; C_{hws} hot-water soluble organic carbon; C_1 KMnO_4 labile organic carbon; C_{org} total organic carbon; total-S total sulphur.

235

Table S4. Lambda values of the Box-Cox transformed sediment parameters.

Data set	Lamda values								
	$D_r(7)$	$D_{cum}(365)$	$D_r(\text{in situ})$	C_{org}	total-S	$SO_4^{2-}_{extr}$	DOC_{extr}	C_{hws}	C_l
Whole data set	0.487	0.303	0.216	-0.050	0.132	0.457	0.946	0.825	0.199
FFA	0.583	0.369	0.214	-0.191	-0.292	0.254	-	0.915	0.513
GKA	0.445	0.236	0.257	-0.052	0.685	0.628	-1.307	-0.203	0.291
non-sulphidic	-0.168	0.122	0.041	1.060	0.062	1.161	-	1.434	0.183
sulphidic	0.375	0.260	0.190	0.162	0.965	0.368	-1.931	1.314	-0.081
transition zone	0.397	-0.029	-0.150	-0.158	-1.649	0.642	-0.012	0.783	-0.834
NO_3^- -bearing	0.121	0.337	0.099	0.752	-0.228	0.679	-	2.949	0.492
NO_3^- -free	0.364	0.670	0.319	0.378	1.998	0.297	-3.158	0.970	0.452

240

Table S5. Lambda values of the Box-Cox transformed variables.

Data set	Lamda values				
	SRC	SRC_C	SRC_S	aF_{SRC}	SFC
Whole data set	-0.024	-0.050	0.132	0.155	0.176
FFA	-0.185	-0.191	-0.291	0.326	0.187
GKA	0.039	-0.052	0.685	-0.139	0.193
non-sulphidic	1.493	1.043	-0.054	0.095	-0.014
sulphidic	0.229	0.159	0.941	-0.313	0.117
transition zone	-0.159	-0.158	-1.650	-0.089	-0.152
NO_3^- -bearing	0.797	0.745	-0.307	0.069	0.120
NO_3^- -free	0.492	0.375	1.914	-0.266	0.344

245

250

References:

- 255 Addy, K., Kellogg, D. Q., Gold, A. J., Groffman, P. M., Ferendo, G., and Sawyer, C.: In situ push-pull method to determine ground water denitrification in riparian zones, *J. Environ. Qual.*, 31, 1017-1024, 2002.
- Altman, D. G. and Bland, J. M.: Measurement in Medicine - The analysis of method
260 comparison studies, *Statistician*, 32, 307-317, 1983.
- Bland, J. M. and Altman, D. G.: Applying the right statistics: Analyses of measurement studies, *Ultrasound in Obstetrics & Gynecology*, 22, 85-93, 2003.
- Bland, J. M. and Altman, D. G.: Comparing methods of measurement - Why plotting difference against standard method is misleading, *Lancet*, 346, 1085-1087, 1995.
- 265 Bland, J. M. and Altman, D. G.: Statistical methods for assessing agreement between two methods of clinical measurement, *Lancet*, 1, 307-310, 1986.
- Eschenbach, W. and Well, R.: Online measurement of denitrification rates in aquifer samples by an approach coupling an automated sampling and calibration unit to a membrane inlet mass spectrometry system, *Rapid Commun. Mass Spectrom.*, 25, 1993-2006,
270 2011.
- Kana, T. M., Darkangelo, C., Hunt, M. D., Oldham, J. B., Bennett, G. E., and Cornwell, J. C.: Membrane inlet mass-spectrometer for rapid high-precision determination of N₂, O₂, and Ar in environmental water samples, *Anal. Chem.*, 66, 4166-4170, 1994.