Interactive comment on "An estuarine tuned Quasi-Analytical Algorithm for VIIRS (QAA-V): assessment and application to satellite estimates of SPM in Galveston Bay following Hurricane Harvey"

The authors would like to thank the two anonymous reviewers for the detailed and helpful comments that will improve the quality and clarity of the paper. The author's responses are detailed below in italics.

# Response to Anonymous Reviewer #1

"The main objective of the paper is to propose an improved version of the Quasi-Analytical Algorithm for the VIIRS ocean color sensor (QAA-V) and for estuarine and near-shore water applications. Calibration and validation of the QAA-V are based on a large synthetic and in situ dataset. Results are convincing. I particularly appreciate the effort intended to present and motivate the modifications/improvements of the standard QAA. Otherwise, I think the paper is well written, clear and very readable."

Response: Thanks. We are glad that the reviewer recognizes our effort to improve the standard QAA.

"However, I note three major deficiencies before publication. By consequence, I recommend this manuscript for publication in Biogeosciences but only after minor revisions are made in order to address the following comments: 1- The QAA-V was developed for the VIIRS ocean color sensor. I find that the VIIRS-specific development of the QAA-V limits the scope of the study."

Response: We have added calibration coefficients for other ocean color (e.g., MERIS, MODIS-A, Sentinel3 OLCI, and SeaWiFS) and land observing (e.g., Landsat8 OLI and Sentinel2 MSI) sensors in revised manuscript (Table S1). Additionally, we also showed the performance of proposed calibration coefficients through performance comparisons between the sensors and field observations (Figure S1). We added Figure 10, Table 3, new sub-sections in "Result" and "Discussion". Based on the application of this study to a large number of ocean color sensors, we will modify the title to "An estuarine tuned Quasi-Analytical Algorithm (QAA-V): assessment and application to satellite estimates of SPM in Galveston Bay following Hurricane Harvey"

# Result Section

# 3.6 Extending the QAA-V tuning to various satellite sensors

The estuarine-specific green to red band tuning was further applied to evaluate and to extend its applicability to past and present ocean color (e.g., SeaWiFS, MERIS, MODIS-Aqua, and Sentinel3 OLCI) and land-observing sensors (Landsat8 OLI and Sentinel2 MSI) (Table 3). The validation analysis showed promising performance of QAA tuning in obtaining total non-water absorption coefficient ( $a_{tmw}443$ ) and total-non water backscattering coefficient ( $b_{btmw}470$ ) in optically complex and shallow waters of Galveston Bay (Fig. 10). Overall, different satellite sensors showed similar trends of  $a_{tmw}443$  and  $b_{btmw}470$  along the transect despite having different spectral and spatial sensor resolutions (Fig. 10I – 10IV). The MREs were ~15 %, 9 %, and 12 % for  $a_{tmw}443$  retrievals from VIIRS, MODIS-A, and Sentinel3 OLCI sensors, respectively (Fig. 10a-c & 10I), whereas they were ~26 %, 7 %, 22 % for  $b_{btmw}470$  retrievals on October 29, 2017 (Fig. 10f-h & 10III). For Landsat8 OLI, these MRE were ~20 % and ~10 % for  $a_{tmw}443$  and  $b_{btmw}470$ , respectively on September 29, 2017 (Fig. 10e, 10j, 10II, & 10IV).

# Discussion Section

4.4 Application of the QAA tuning to various ocean color and land observing sensors

Sensor-specific QAA tuning (e.g., QAA-V for VIIRS, MODIS, Landsat-8 OLI, and Sentinel3 OLCI) showed overall valid retrieval of absorption and backscattering coefficients with various ocean color and land-observation sensors (Fig. 10). Although satellite-derived values and trends of  $a_{mw}443$  and  $b_{bmw}470$  are similar to the field observations, the observed discrepancies could have in addition to the uncertainties in field measurements due to several sources of errors. For example, it is well-known that satellite products suffer from large errors in the blue region especially in coastal waters due to atmospheric correction (Table 4; Supplementary S4). The large errors between field and Landsat8 OLI derived  $a_{mw}443$  could have resulted due to the fact that the QAA processing chain uses these erroneous blue Rrs values to obtain  $a_{mw}$  at the blue wavelengths (Table 2; Level 3). However, the  $b_{bmw}$  retrievals at the blue wavelengths are unaffected by the blue Rrs inputs (Table; Level 2). Likewise, the errors were relatively smaller at the reference wavelength (Table 4) because the proposed QAA tuning avoided using blue wavelengths in the primary step of getting  $a_{mw}$  and  $b_{bmw}$  at a reference wavelength. Hence, the atmospheric correction procedure is an important step that would impact the performance of QAA-V in ocean color applications of shallow estuarine and near-shore waters.

Another important discrepancy among various sensor maps is the number of masked pixels in shelf waters (Fig. 10). We have used a VIIRS band-ratio based threshold ( $\rho$ =0.65) to separate green waters (e.g., productive coastal waters) and blue waters (e.g., open ocean) (Eq. 15) and applied it to various satellite sensors. Although this threshold worked well for the sensors with similar green and red bands (e.g., MODIS-A and VIIRS), it did not perform as well for Sentinel 3 OLCI and Landsat 8 OLI because of notable differences between the green and red bands of these sensors and the VIIRS sensor (Table 3). Although, the proposed threshold works well to represent estuarine and near-shore waters for various ocean color and land-observing sensors, it could be optimized for each satellite sensor.

"Moreover, authors do not motivate the choice of this sensor. For example, why choose VIIRS while Landsat-8/OLI or Sentinel-2/MSI provide data with a better spatial resolution (which is crucial for coastal applications)? I recommend to the authors to make explicit the choice of VIIRS. I also recommend that authors provide in a table the calibration coefficients for other ocean color sensors."

Response: We focused on VIIRS primarily due to our earlier work based on this sensor (Joshi et al. 2017). We appreciate the reviewer's suggestion for using land observing sensors for coastal applications. We worked on several ocean color and land observing sensors and provided their calibration coefficients and validation analysis in revised manuscript (Table S1 and Fig. S1). We strongly feel that our study is a wider ocean color application than for the VIIRS sensor. We included the following lines in "2.3 QAA-V processing chain in Materials and methods" to initiate discussion on this additional work,

To extend and to evaluate the applicability of estuarine-specific QAA tuning, it was further applied to various ocean color (Sentinel3 OLCI, MODIS-Aqua, MERIS, and SeaWiFS) and land observation sensors (Landsat8 OLI and Sentinel2 MSI). The calibration coefficients for obtaining total non-water absorption coefficient at a reference wavelength ( $a_{tmw}$  ( $\lambda_0$ ); Level 1B in Table 2) are given in Table 3.

"2- Authors mention that the QAA-V can be applied in optically shallow waters. For instance, p.1, lines 8-11: "The standard quasi-analytical algorithm (Lee et al., 2002) was tuned as QAA-V using a suite of synthetic data and in-situ measurements to improve its performance in OPTICALLY complex and shallow estuarine waters". p.4, lines 5-7: "In this study, we present a tuned multiband Quasi-Analytical Algorithm (QAA-V) optimized to estimate IOPs in

OPTICALLY shallow and near-shore waters for the Visible and Infrared Imaging Radiometric Suite (VIIRS) ocean color sensor". or, p.19, lines 12-14: "The QAA-V may not perform satisfactorily in optically deep waters as the empirical relationships were designed specifically for the optically shallow environments". I think this error comes from a lack of knowledge of the authors of the definition of "optically shallow waters". "Optically shallow waters" doesn't mean "shallow waters". A definition can be found in the IOCCG Report Number 3 (2000). "Optically shallow implies that the product of the diffuse attenuation coefficient Kd and the geometric depth z is small" (p.33). "Coastal waters can also be optically shallow, so that water-leaving radiance is affected by bottom reflectance" (p.94). "Where coastal waters are optically shallow, algorithms for water-column constituents need to remove contributions from bottom reflectance" (p.99). For highly absorbing and turbid waters (which is the case of this study), we can expect a high value of Kd and consequently a high value of the product of Kd and z (even in the case where z is small). It is difficult to believe that the water-leaving radiance is significantly affected by bottom reflectance. More important, the QAA is not designed to take into account the contribution from bottom reflectance. No study has ever shown that OAA works in optically shallow waters. By consequence, I recommend to the authors to replace "optically shallow waters" by "shallow waters. Moreover, for clarity, the author should also specify that the QAA-V was developed for optically deep waters."

<u>Response:</u> Thank you for pointing this out. We appreciate the reviewer's detailed comment and suggestion for this error. We have replaced "optically shallow waters" by "optically complex and shallow waters" or "shallow waters" at several locations in manuscript.

"3- The results do not really demonstrate the interest of using QAA rather than existing algorithms (for instance, Nechad et al. (2010) or Han et al.(2016)) to estimate SPM. P.16, lines 15-22, authors mention the limits of the use of Rrs to estimate SPM before to underline the interest of the use of bbp. They forget to mention the strong limits of this alternative method. bbp is not directly measured. The inversion model used to derivate bbp generates an inherent error that propagates for the SPM inversion. Another source of error is due to the fact that the bbp to SPM ratio is not constant and its value depends of the particle nature. I recommend to authors to discuss precisely the limits of the "bbp method" for the SPM estimation."

Response: Thank you very much for this suggestion. Because we obtained reasonable estimates of backscattering coefficients from QAA-V processing chain, we decided to include in latter part of this study (a case study of post-hurricane SPM dynamics in Galveston Bay) as an application of QAA-V for obtaining Level-2 products such as SPM (this study). We agree that there are a few limitations for bbp-based approach because the uncertainty in satellite estimates of bbp (and thus SPM estimates). We listed these limitations in Section 4.2 according to the reviewer's suggestion.

Some factors that limit the efficacy of "bbp method" and cause differences between field and satellite SPM matchups include:

1) propagation from various steps of the QAA-V processing chain to  $b_{btnw}532$  (e.g., 20–30 %, Fig. 7c) and hence, further down to the SPM inversion, 2) the uncertainty in the atmospheric-corrected green and red Rrs (e.g., 5–20 %, Table 4), 3) the uncertainty in SPM- $b_{btnw}532$  relationship due to limited observations, 4) the assumption of linearity beyond in SPM- $b_{btnw}532$  model beyond the instrument threshold which may not hold well because  $b_{btnw}532$  to SPM ratio depends on the particle nature and it may not be always constant especially in highly turbid waters, and 5) errors in SPM measurements.

"This study presents a tuning of the well-known standard quasi-analytical algorithm (QAA, Lee et al., 2002) to improve its performance in optically complex and shallow estuarine waters. This tuning is based on both synthetic data and in-situ measurements. The improvement due the tuned algorithm (called QAA-V) is assessed based on once again synthetic data (Hydrolight computations) and in-situ measurements in several US coastal and estuarine waters. The performance of the tuned algorithm is proved to be reasonable so as the improvement when compared to QAA last version (v6). Finally, QAA-V is applied to VIIRS satellite data recorded over turbid coastal waters (Galveston Bay, Texas) to retrieve then map the particulate light backscattering coefficient at 532 (bbp532) actually converted into suspended particulate matter concentrations (SPM) using an empirical relationship. SPM maps generated after an intense flooding event are analyzed using river discharge and wind speed/direction data. Overall, the manuscript presents a significant piece of work with interesting results. Moreover, it is well organized and written. The most convincing part is certainly the tuning of the QAA algorithm for shallow estuarine waters and the efforts made to validate the results obtained."

Response: We appreciate that the reviewer found this work interesting and significant.

"The less convincing section is the retrieval and mapping of SPM concentrations in Galveston Bay using VIIRS satellite data as: QAA allows retrieving the light absorption and particulate coefficients of colored water constituents on top of pure water (anw and bbnw, respectively), i.e. much more than SPM concentration. "One would expect maps of anw and bbnw to be presented and analyzed at the end of the study that could highlight interesting spatial and temporal variations of CDOM and SPM composition and size distribution over the study area. My recommendation is to accept the manuscript for publication if the authors can address in more details this last comment, at least in the Discussion and Conclusions sections."

Response: Because we obtained reasonable estimates of backscattering coefficients from QAA-V processing chain, we decided to include in latter part of this study an application of QAA-V for investigating post-hurricane SPM dynamics in Galveston Bay. In the revised version, we showed results of  $a_{tnw}$  and  $b_{bnw}$  maps for VIIRS and additional ocean color and land observing sensors during our field campaigns in Galveston Bay (Table S1, Fig. S1). The same are discussed briefly in "Results" and "Discussion" Sections. In a separate study, we are presenting more detailed study of CDOM and particulate absorption dynamics and fluxes associated with Hurricane Harvey.

"Page 6 SPM uncertainty? Sensor used for bbp measurements and data processing/corrections?"

<u>Response:</u> We did not have the replicates of SPM measurements, therefore uncertainty in sample collection and filtering process is unknown. However, the uncertainty in weighing scale measurement is  $\pm 0.1$  mg. We have used WETLabs VSF-3 (470 nm, 530 nm, and 660 nm) and ECO-BB (532 nm) sensors for  $b_{bp}$  measurements (D'Sa et al., 2006).

"Eq. 2: Rrs (residual)? Please define and justify"

Response: Rrs (residual) is attributed to residual sky-radiance. Generally, it is assumed that water-leaving radiance is zero at 750 nm in open ocean, which may not hold well in coastal and estuarine waters. We moved residual wavelength to 950 nm in this study with an assumption that water-leaving radiance is zero at 950 nm (Which may not be true in highly turbid regions of Galveston Bay such as near the Trinity River). We have updated text accordingly in revised manuscript.

"Eqs. 1-3: provide physical unit for each parameter"

Response: Units will be provided in revised manuscript.

Table S1: The calibration coefficients for sensor-specific QAA tuning.  $\lambda_0$  is a sensor-specific reference wavelength.

wavelength.							
G.	(= 0= (= ))				(1	2\	
Sensor	$\rho = log_{10} \left( \frac{R_{rs}^{0-}(\lambda_0)}{R_{rs}^{0-}(\lambda_1)} \right)$	$a_{tnw}(\lambda_0) = 10^{(a+b\times \rho + c\times \rho^2)}$ (Level 1B — Table 2)					
		ρ < 0.25			$\rho \ge 0.25$ and $\rho \le 0.65$		
		a	b	c	a	b	c
VIIRS	$\lambda_0 = 551 \text{ nm } \& \lambda_1 = 671 \text{ nm}$	0.139	-1.788	0.490	0.406	-2.940	0.928
MODIS-Aqua	$\lambda_0 = 555 \text{ nm } \& \lambda_1 = 667 \text{ nm}$	0.091	-1.800	0.560	0.275	-2.674	0.813
Sentinel3 OLCI	$\lambda_0 = 560 \text{ nm } \& \lambda_1 = 674 \text{ nm}$	0.176	-1.830	0.528	0.397	2.940	0.800
MERIS	$\lambda_0 = 560 \text{ nm } \& \lambda_1 = 665 \text{ nm}$	0.081	-1.868	0.688	0.314	-2.733	0.713
SeaWiFS	$\lambda_0 = 555 \text{ nm } \& \lambda_1 = 670 \text{ nm}$	0.128	-1.792	0.505	0.276	-2.742	0.842
Sentinel2 MSI	$\lambda_0 = 560 \text{ nm (Band 3)}$	0.0814	-1.868	0.688	0.223	-2.732	0.740
	&						
	$\lambda_1 = 665 \text{ nm (Band 4)}$						
Landsat8 OLI	$\lambda_0 = 560 \text{ nm (Band 3)}$	-0.087	-1.900	0.952	0.057	-2.667	0.753
	&						
	$\lambda_1 = 655 \text{ nm (Band 4)}$						

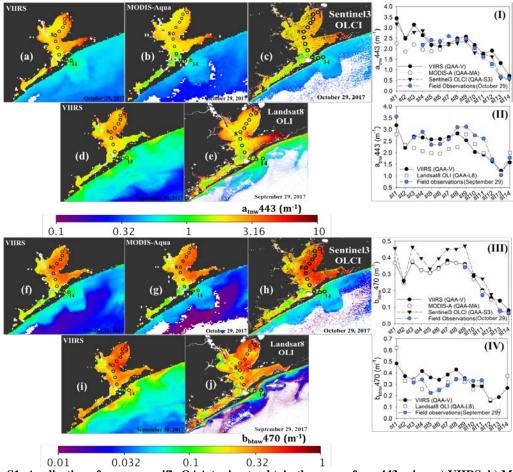


Figure S1: Application of sensor-specific QAA tuning to obtain the maps of  $a_{tnw}443$  using a) VIIRS, b) MODIS-Aqua and c) Sentinel3 OLCI on October 29, 2017, and d) VIIRS and e) Landsat8 OLI on September 30, 2017 and September 29, 2017, respectively. The validation of these maps with field observation along the transect (St. 1 to St. 14) is shown in (I) for figs. 8a-8c and in (II) for figs. 8d & 8e. The maps of  $b_{btnw}470$  were obtain similarly for f) VIIRS (October 29, 2017), g) MODIS-Aqua, h) Sentinel3 MSI, i) VIIRS (September 30, 2017), and j) Landsat8 OLI (September 29, 2017) with their validation results in (III) and (IV), respectively. Parameter values beyond the upper limit of tuned QAA ( $\rho > 0.65$ ) are shown masked in white.

# Additional references:

Ishan D. Joshi, Eurico J. D'Sa, Christopher L. Osburn, Thomas S. Bianchi, Dong S. Ko, Diana Oviedo-Vargas, Ana R. Arellano, Nicholas D. Ward, Assessing chromophoric dissolved organic matter (CDOM) distribution, stocks, and fluxes in Apalachicola Bay using combined field, VIIRS ocean color, and model observations, Remote Sensing of Environment, Volume 191, 2017, Pages 359-372, ISSN 0034-4257, https://doi.org/10.1016/j.rse.2017.01.039.

D'Sa, E. J., Miller R. L., and Del Castillo, C.: Bio-optical properties and ocean color algorithms for coastal waters influenced by the Mississippi River during a cold front, Applied Optics, 45, 7410-7428, 2006.

# An estuarine tuned Quasi-Analytical Algorithm (QAA-V): assessment and application to satellite estimates of SPM in Galveston Bay following Hurricane Harvey

5 Ishan D. Joshi<sup>1</sup>, Eurico J. D'Sa<sup>1,\*</sup>

15

<sup>1</sup>Department of Oceanography and Coastal Sciences, Louisiana State University, Baton Rouge, LA 70803, USA; (ijoshi1@lsu.edu, ejdsa@lsu.edu)

Correspondence to: Eurico J. D'Sa (ejdsa@lsu.edu; Tel: +1-225-578-0212)

Abstract. The standard quasi-analytical algorithm (Lee et al., 2002) was tuned as QAA-V using a suite of synthetic data and in-situ measurements to improve its performance in optically complex and shallow estuarine waters. Two modifications were applied to the standard OAA: 1) a semi-analytical relationship for obtaining remote sensing reflectance just below the water-surface as a function of absorption and backscattering coefficients was updated using Hydrolight<sup>®</sup> simulations, and 2) an empirical model of the total non-water absorption coefficient was proposed using a ratio of green to red bands of a VIIRS satellitean ocean color sensor, which is known to work well in various inland and estuarine environments. The QAA-V derived total absorption and backscattering coefficients, which were evaluated in a variety of waters ranging from the highly absorbing and turbid to relatively clear shelf waters, showed satisfactory performance on Hydrolight<sup>®</sup>-simulated synthetic dataset (R<sup>2</sup>>0.87, MRE<17 %), in-situ estuarine & near-shore dataset (R<sup>2</sup>>0.70, MRE<35 %), and the NOMAD dataset (R<sup>2</sup>>0.90, MRE<30 %), respectively. When compared to the standard OAA (OAA-v6), the OAA-V showed an obvious improvement with ~30–40 % reduction in absolute mean relative error for Hydrolight<sup>®</sup>simulated synthetic and in-situ estuarine & near-shore datasets, respectively. The methodology of tuning QAA was applied to other ocean color and land observing sensors with promising validation results. methodology of tuning QAA was applied to the VIIRS ocean color sensor and validation results suggest that the proposed methodology can also be applied to other ocean color & land-observing sensors. -The OAA-V-OAA-V was also assessed on VIIRS imagery using a regional relationship between suspended particulate matter (SPM) and particulate backscattering coefficient at 532nm (b<sub>bnw</sub>532) (R<sup>2</sup>=0.89, N=33). As a case-study, the QAA-V processing chain and VIIRS imagery were used to generate a sequence of SPM maps of Galveston Bay, Texas following the unprecedented flooding of Houston and surrounding regions due to Hurricane Harvey in August 2017. The record discharge of floodwaters through two major rivers into the bay resulted in very high SPM concentrations over several days throughout the bay, with wind forcing additionally influencing its distribution into the coastal waters of the northern Gulf of Mexico. The promising results of this study suggest that the application of QAA-V- to various ocean color and land-observing satellite imagerys could can be used to assess the bio-optical state and water quality dynamics in a variety of coastal systems around the world.

[Keywords: QAA, VIIRS, SPM, Hurricane Harvey, Galveston Bay, ocean color]

#### 1 Introduction

5

20

25

Urbanization and associated anthropogenic stressors are of major concern for ecosystem health and water quality of estuarine environments, affecting cumulatively the coastal and marine ecosystems through estuarine-shelf exchange processes (Haynes et al., 2007; Bricker et al., 2008; Jutterström et al., 2014). Inherent optical properties (IOPs) such as absorption and backscattering coefficients have immense potential to capture changes in the biooptical state of an aquatic system and hence, provide crucial information about regional alterations in water quality associated with terrestrial pollution (Zielinski et al., 2009), harmful algal bloom (Hu et al., 2008), floods (Álvarez-Romero et al., 2013), hurricanes (Lohrenz et al., 2008; Chen et al., 2009), seasonal cycles (D'Sa and Miller, 2003; D'Sa et al., 2006; Singh et al., 2010; Joshi and D'Sa, 2015), and even man-made catastrophe such as oil spills (Ramsey III et al., 2011; D'Sa et al., 2016). In addition to water itself, there are three major water constituents that contribute to the water-leaving radiance (Lw), namely, colored dissolved organic matter (CDOM; also called as "gelbstoff" or "gilvin"), suspended sediments (detritus and minerals), and phytoplankton. CDOM and suspended sediments are strongly associated with light absorption in the blue and, therefore, high concentrations may reduce light quality for the photosynthetic organisms (e.g., phytoplankton and submerged vegetation) in estuarine waters (Keith et al., 2002; Ralph et al., 2007; Pedersen et al., 2012). The effects of water turbidity caused by dissolved and particulate components on the physical and behavioral changes of aquatic species are have been well reported in the literature (Wang et al., 2008; Kjelland et al., 2015). Collectively, these water constituents attenuate incoming light, while a fraction of it is backscattered out of water by the water itself and particles. Therefore, deciphering Lw (or remote sensing reflectance-Rrs) to separate the individual contributions of optically active components may provide crucial information about the bio-optical state of a water body.

Field-based sampling methods are traditional and accurate ways to measure bio-optical properties; however, they lack adequate spatial and temporal coverage for capturing short-period bio-optical alterations and estuarine-scale dynamics. In contrast, remote sensing platforms (e.g., satellite sensors) sense  $L_w$  (or Rrs) signal and are advantageous over field observations in providing better synoptic spatiotemporal coverage if the signal is

successfully linked to in-water IOPs. As such, satellite-based remote sensing has been widely used to monitor harmful algal blooms (Carvalho et al., 2011; Hu et al., 2016), pollution events (Mishra et al., 2013; Zhao et al., 2014), suspended sediment dynamics (D'Sa et al., 2007), CDOM distribution and carbon flux (Joshi and D'Sa, 2015; Joshi et al., 2017a), phytoplankton biomass and primary production (Uitz et al., 2010; Matsumoto et al., 2014), and to evaluate the effects of climate change on exotic marine biota (Liu et al., 2006; Castillo and Lima, 2010; Cavanaugh et al., 2011; Pu and Bell, 2017).

In recent years, both empirical and semi-analytical models have been frequently used to link satellite observations and in-water properties,  $\frac{1}{100}$  each  $\frac{1}{100}$  s. Yertical diffuse attenuation coefficients- $\frac{1}{100}$  s. Suspended particulate matter concentrations-SPM, CDOM, pigment concentrations, phytoplankton cell counts and cell size, and particle size (D'Sa et al., 2003; 2006; 2007; Pan et al., 2010; Chen et al., 2013; Brewin et al., 2015; Joshi et al., 2017b). Empirical relationships are mathematical formulations (e.g., simple or multiple regressions) that directly link water-leaving measurements to the parameter of interest in surface waters. They are simple in nature, easy to implement, and do not require deep understanding of the underlying relationships between light and water properties. Because the performance of empirical relationships is uncertain outside the range of observations that are used to develop them, their applicability is doubtful and may cause significant errors if used in waters with different optical properties. In contrast, semi-analytical models, which are based on radiative transfer theory, invert Rrs using a suite of analytical and empirical relationships to derive the water IOPs (absorption and backscattering coefficients of water constituents) (Lee et al., 2002). Because they solely depend on the waterleaving radiance and require less information about in-water bio-optical properties, they have better applicability and accuracy as compared to the empirical methods in a variety of waters (IOCCG, 2006). However, a major drawback is that the retrieval of IOPs for individual water components is strongly dependent on the performance of the respective empirical models.

10

15

To some extent, this drawback is minimized in a multiband quasi-analytical algorithm (QAA) for optically deep waters (Lee et al., 2002). This algorithm analytically decomposes total non-water absorption coefficients ( $a_{tnw}$ ) for combined CDOM and suspended sediments ( $a_{dg}$ ) and phytoplankton ( $a_{\varphi}$ ) using their spectral information. The QAA has been improved (e.g., QAA-v5 and QAA-v6) for better performance in the turbid coastal waters (Lee et al., 2009). Several studies have also contributed to the standard QAA with regional/global modifications in a variety of waters such as turbid waters of the Mississippi and Atchafalaya River system (Zhu et al., 2011), coastal waters of South China Sea (Dong et al., 2013), and inland waters of the USA and China (Li et al., 2013). A large number of studies have evaluated the standard QAA in different regions (e.g., turbid inland waters of northeast China, shallow ponds of the northwestern Mississippi, Lake Taihu, Yellow

Sea, East China Sea, Arctic, and low-latitude oceans) with acceptable performance in coastal and oceanic waters, but decreasing accuracy towards CDOM-rich and sediment-rich estuarine and inland waters (Lee et al., 2010; Qing et al., 2011; Zhu et al., 2011; Mishra et al., 2013; Mitchell et al., 2014; Zheng et al., 2014; Pitarch et al., 2016). Several factors could be responsible for the QAA's poor performance in shallow waters, including: 1) the empirical relationships of QAA were designed using field observations in coastal and oceanic environments and may not be suitable to-for the optically deep deep (e.g., estuarine and near-shore waters), and 2) majority of empirical models of the standard QAA use Rrs at blue wavelengths (e.g., 443nm and 490nm); however, it is well-known that satellite products suffer from large errors at short wavelengths due to uncertainties in atmospheric-correction, especially in coastal waters. This suggests the need for an estuarine-specific tuning of the QAA and its evaluation and application to newer ocean color satellite sensors.

10

15

20

In this study, we present a tuned multiband Quasi-Analytical Algorithm (QAA-V) that is optimized primarily for the Visible and Infrared Imaging Radiometric Suite (VIIRS) ocean color sensor and calibrated for various other ocean color sensors, such as Sentinel-3 Ocean and Land Colour Instrument (Sentinel3 OLCI), MODerate resolution Imaging Spectroradiometer (MODIS-Aqua), MEdium Resolution Imaging Spectroradiometer (MERIS) and Sea-viewing Wide Field-of-view Sensor (SeaWiFS), and land-observing sensors, such as Landsat-8 Operational land imager (Landsat8 OLI) and Sentinel2 Multispectral instrument (Sentinel2 MSI) to estimate IOPs in shallow estuarine and near-shore waters. First, synthetic data are-were generated using Hydrolight<sup>®</sup> simulations (Mobley and Sundman, 2013) for highly absorbing and scattering waters, and used collectively with estuarine in-situ observations to update coefficients for the semi-analytical and empirical models of the standard QAA processing chain. The algorithm's performance is then evaluated on three datasets: 1) Hydrolight® simulated dataset, 2) a subset of well-known National bio-Optical Marine Algorithm Dataset (NOMAD), and 3) field observations that were obtained in various estuaries in the U.S. East Coast and the Gulf of Mexico. The QAA-V performance is compared to the QAA-v6, which was mainly tuned to improve OAA's performance in turbid coastal waters. Additionally, using a linear backscattering-SPM relationship, the QAA-V's applicability to VIIRS and estuarine waters is analysed for SPM of various coastal sites, including Galveston Bay (USA). Finally, as a case study, VIIRS-derived SPM imagery of Galveston Bay are-were obtained following Hurricane Harvey to assess SPM dynamics in the bay and its impact on the coastal ocean.

Formatted: Font: Not Italic

Formatted: Font: Not Italic

#### 2 Materials and methods

10

20

## 2.1 Data for QAA-V algorithm

Three datasets were used for tuning and evaluating OAA-V's performance in a variety of waters ranging from highly turbid estuarine environments to the relatively clear shelf waters. These datasets include: 1) a synthetic dataset, 2) NASA's bio-optical marine algorithm dataset, and 3) an estuarine dataset. Availability of numerous observations representing a true state of natural systems is the primary requirement for any algorithm development and validation analysis. Hydrolight<sup>®</sup> radiative transfer model (Mobley and Sundman, 2013) was used to generate a large set of synthetic data (HL; N=561) for tuning and extending QAA-V's ability to perform in highly absorbing and highly scattering waters (e.g., turbid estuarine environments). The process of generating synthetic data using Hydrolight<sup>®</sup> simulations was similar to the International Ocean Color Coordinating Group report (IOCCG Report-5) (IOCCG, 2006) and is briefly described in the supplementary section (S1) with necessary modifications based on in-situ estuarine observations. In-situ estuarine & near-shore dataset (IES) included 340 concurrent water inherent optical properties (IOPs; e.g., absorption and backscattering coefficients) and above-water Rrs measurements at various locations in the U.S. East Coast and the northern Gulf of Mexico (Fig. 1a). Data were compiled from NASA's SeaBASS repository by applying a depth threshold of 10 m for obtaining measurements in estuarine and near-shore waters (Werdell et al., 2003). The IES dataset was further divided into a training set (EcoHAB & Tampa Bay; N=121) and a testing set (N=219) for tuning and validating OAA-V, respectively (Table 1). NOMAD (NASA bio-Optical Marine Algorithm Dataset) is a freely available, high quality field dataset for ocean color algorithm development and validation (Werdell and Bailey, 2005). It includes IOPs and Rrs collected in waters ranging from oceanic to estuarine environments, but mostly in shelf waters around the world. We extracted a subset (N=547) containing complete observations of IOPs and Rrs (Fig. 1b). Data distributions of synthetic data clearly showed the representation of CDOM-rich and sediment-rich waters, whereas phytoplankton absorption was of secondary importance as generally observed in several estuarine environments (Fig. 2). The training and testing data (HL and IES datasets) ranged from approximately 0.1 to 7 m<sup>-1</sup> for the CDOM absorption coefficient (a<sub>g</sub>443), 0.05 to 4.5 m<sup>-1</sup> for (detritus+minerals, or non-algal particles) absorption coefficient (a<sub>NAP</sub>443), 0.05 to 2 m<sup>-1</sup> for the phytoplankton absorption coefficient (a<sub>0</sub>443), and 0.04 to 0.2 m<sup>-1</sup> for the particle backscattering coefficient (b<sub>btnw</sub>532) (Fig. 2).

## 2.2 Data for Galveston Bay

10

15

20

Galveston Bay, the seventh-largest estuary in the United States (area=\_~1600 km²; mean depth=\_~2 m), is located along the upper coast of Texas in the northern Gulf of Mexico (Fig. 1c). The Trinity River is the major source of fresh water (~50 %) to the bay followed by the San Jacinto River (~30 %) and local watersheds (~20 %) (Guthrie et al., 2012; Lucena and Lee, 2017). With the busiest petrochemical port in the US, Galveston Bay experiences frequent oil spills; ~3,500 oil spills (~4,16,000 gallons) incidences were reported between 1998-2009 (Lester and Gonzalez, 2011). The bay is connected to the Gulf of Mexico via 3 passes: Bolivar Roads Pass, Rollover Pass, and San Luis Pass. Galveston Bay can be divided into four sections, 1) Trinity Bay (TB), 2) upper Galveston Bay (UGB), 3) the lower Galveston Bay (LGB), and 4) East Bay (EB) (Fig. 1c).

Surface water samples were collected at several stations during two field surveys in on September (September 29, 2017) and October (October 29–30, 2017) as a part of a larger study to investigate the aftereffects of Hurricane Harvey (August 25-29, 2017) on the water quality of Galveston Bay. Available measurements of suspended particulate matter (SPM) concentration were utilized for evaluating the applicability of QAA-V in estuarine environments. Samples were filtered using pre-combusted and pre-weighed 47 mm, 0.7µm porosity Whatman GFF filters for SPM concentrations (Neukermans et al., 2012). A weighting scale with an accuracy of ±0.1 mg was used to measure mass of SPM. Profiling measurements of b<sub>brow</sub> were collected at each station using WETLabs VSF3 (470 nm, 530 nm, 670 nm) and ECO BB (532 nm) sensors. An analytical scale with an accuracy of ±0.1 mg was used to measure mass of SPM. Profiles of b<sub>btnw</sub> were obtained at each station using the WETLabs VSF-3 (470 nm, 530 nm, 670 nm) and ECO BB (532 nm) backscattering sensors (D'Sa et al. 2006) and surface values were averaged for depth <1 m. Above-water measurements of water-surface radiance (L $_{\rm w}$ , <u>Unit:</u> Wm<sup>-2</sup>nm<sup>-1</sup>sr<sup>-1</sup>, nadir= $40^{\circ}$ - $50^{\circ}$ , azimuth= $90^{\circ}$ - $135^{\circ}$ ), sky radiance (L<sub>sky</sub>, <u>Unit:</u> Wm<sup>-2</sup>nm<sup>-1</sup>sr<sup>-1</sup>, zenith= $40^{\circ}$ - $50^{\circ}$ , azimuth=90°-135°), and reference-plate radiance (L<sub>plate</sub>, <u>Unit</u>: Wm<sup>-2</sup>nm<sup>-1</sup>sr<sup>-1</sup>, nadir=0°, azimuth=90°-135°) were collected using GER1500 512iHR spectroradiometer under clear-sky conditions (Mobley, 1999). The spectroradiometer was set to provide an average of 3 internal scans for considering the variability in reference and target conditions. Hence, the final spectrum was an average of 9 spectra (3 replicates with 3 internal scans per measurement) at each station (Joshi et al., 2017a). The above-water remote sensing reflectance (Rrs<sup>0+</sup>, Unit: sr<sup>-1</sup>) was obtained using the following equations (Mueller et al., 2003),

Downwelling Irradiance  $(E_d)$   $(Wm^{-2}nm^{-1}sr^{-1}) = \pi \times \frac{L_{plate}}{\rho_{plate}}$   $(Unit: Wm^{-2}nm^{-1}sr^{-1})$  (1)

Above – water remote sensing reflectance  $(R_{rs}^{0+})$   $(sr^{-1}) = \frac{L_W - \rho \times L_{sky}}{E_d} - R_{rs}(residual)$  (Unit:

where  $\rho_{plate}$  is reference plate reflectance (99%) and  $R_{rs}(residual)$  is attributed to residual sky-radiance whichwas taken as  $Rrs^{0+}(950 \text{ nm})$  (Mobley, 1999).

Formatted: Indent: First line: 0", Don't adjust space between Latin and Asian text

In addition, discharge data were acquired from USGS river gauge sites for the Trinity River (Romayor site-USGS 08066500 & Wallisville site-USGS 08067252) and at the San Jacinto River (the eastern flank-USGS 8070200 & the western flank-USGS 8068090) for examining variations in freshwater flows after Hurricane Harvey. Wind speed and direction were acquired from NOAA Eagle Point station (ID-8771013) in Galveston Bay. Nine Level 1 VIIRS (9 images) imagesand MODIS Aqua (1 image) products Level-1 VIIRS (9 images) and MODIS-Aqua (1 image) products were obtained from NASA's Ocean Color data archive (OBPG, NASA), including three images during field surveys in Galveston Bay. VIIRS imagery was not available on September 29, 2017 corresponding to the first field survey; hence, the next day image (September 30, 2017) was used in this analysis. Sentinel3 OLCI Level-2 image was downloaded from Earth Observation Portal (EUMETSAT) and Lansat8 OLCI Level-1 image was downloaded from Earth Observation Portal (EUMETSAT) and Landsat8 OLI Level-1 image was downloaded from Earth Observation Portal (EUMETSAT) and Landsat8 OLI Level-1 image was downloaded from USGS Earth Explorer for October 29, 2017.

#### 2.3 QAA processing chain

5

15

The underlying structure of QAA-V is similar to the standard quasi-analytical algorithm (QAA; Lee et al., 2002) and its modifications (e.g., QAA-v5 and QAA-v6) suitable to coastal and open oceans (Lee et al., 2007; Lee et al., 2009). The processing pathway of QAA-V is illustrated in Table 2 and briefly mentioned here with justifications for necessary modifications. The QAA and its updated versions rely upon the principle that the spectral remote sensing reflectance just below the water surface (Rrs<sup>0</sup>) is a function of the spectral backscattering and absorption coefficients (Gordon et al., 1988) and it can be modeled using the following equation (Table 2 – Level 1A),

$$R_{rs}^{0-}(\lambda) = g_0 \times u(\lambda) + g_1 \times [u(\lambda)]^2 - (sr^{-1}); \quad u(\lambda) = \frac{b_{bt}(\lambda)}{a_t(\lambda) + b_{bt}(\lambda)}$$
(3)

 $a_t$  and  $b_{bt}$  are total absorption coefficient and total backscattering coefficient  $\underline{(m^{-1})}$ , respectively. Rrs<sup>0</sup> can be easily computed from above surface remote sensing reflectance (Rrs<sup>0+</sup>) using the following relationship (Lee et al., 1999) (Table 2 – Level 0),

$$R_{rs}^{0-}(\lambda)(sr^{-1}) = \frac{R_{rs}^{0+}(\lambda)}{(0.52 + 1.7 \times R_{rs}^{0+}(\lambda))}$$
(4)

The coefficients  $g_0$  and  $g_1$  are empirically derived parameters related to the directional nature of the upwelling light field (Q), and f (well-known as f/Q term). These coefficients depend on sun angle, viewing geometry, wind speed, and the bio-optical state of natural waters and vary with phase function (Morel and Gentili, 1991; 1993; 1996). Thus, appropriate coefficients are needed for different aquatic environments (Lee et al., 2002). For example, the values of  $g_0$  and  $g_1$  were previously suggested as 0.0949 and 0.0794, respectively, for the oceanic waters (Gordon et al., 1988). Later, better approximations of g<sub>0</sub> (0.0895) and g<sub>1</sub> (0.1247) were proposed for the reflective coastal waters using radiative transfer models on simulated data (Lee et al., 1999). Average values of g<sub>0</sub> and g<sub>1</sub> from Gordon et al. (1988) and Lee et al. (1999) were also used for both coastal and oceanic waters (Lee et al., 1999). The synthetic data for obtaining these historic values of go and g1 were generated using Case-1 radiative transfer models. As the first modification, we updated these coefficients using Hydrolight<sup>®</sup> simulations with a 4-component case-2 model (supplementary S1) because a shallow water environment was the main focus of this study. In addition, it has been previously suggested that the molecular scattering may primarily contribute to the Rrs especially in the blue and green wavelengths in oceanic waters. However, the phase function effect of water molecules could be much smaller than that of particles in near-shore and estuarine waters. Hence, we have avoided separating Eq. (3) as it is usually done for accounting phasefunction effects of individual backscattering contributors (Lee et al., 2013; Zheng et al., 2014).

Next, QAA-v6 uses a set of empirical models (e.g., Eq. 5) based on above-surface Rrs threshold (0.0015 sr<sup>-1</sup>) to estimate total non-water absorption coefficient at a reference wavelength in coastal and oceanic waters (Table 2 – Level 1B),

If 
$$R_{rs}^{0+}(670) \leq 0.0015 \text{ sr}^{-1}$$

5

25 
$$a_{tnw}(\lambda_0) = 10^{(-1.146-1.366\times x-0.469\times x^2)}$$
, where  $x = \log_{10}\left(\frac{R_{rs}^{0-}(443) + R_{rs}^{0-}(490)}{R_{rs}^{0-}(\lambda_0) + 5\times R_{rs}^{0-}(670)\times \frac{R_{rs}^{0-}(670)}{R_{rs}^{0-}(490)}}\right)$ , else,  $a_{tnw}(\lambda_1) = 0.39 \times \left[\frac{R_{rs}^{0+}(670)}{R_{rs}^{0+}(443) + R_{rs}^{0+}(490)}\right]^{1.14}$  \_\_\_\_ (5) where  $a_{tnw}$  is total non-water absorption coefficient  $\underline{(m^{-1})}$  and  $\lambda_0 = 555$  and  $\lambda_1 = 670$  nm.

We avoided using blue wavelengths in our empirical models as blue bands, especially 443 nm or lower bands suffer from large errors in atmospheric-correction due to the high abundance of CDOM and suspended particles, and absorbing aerosols in a coastal environment. In contrast, the green to red band ratio (GRBR) can be used for estimating the absorption coefficient of an individual water constituent with the primary condition of their dominance in the study region. The GRBR has been used, for example, to monitor water constituents in various estuarine and coastal waters, e.g., a<sub>e</sub>355 in Barataria Bay, USA (Joshi and D'Sa, 2015), a<sub>e</sub>412 in Apalachicola Bay, USA (Joshi et al., 2017a), a<sub>dg</sub>412 in Galveston Bay, USA (D'Sa et al., submitted), suspended particulate matter (D'Sa et al., 2007), and chlorophyll index (harmful algal bloom) in the northern Gulf of Mexico (Qi et al., 2015). Estuarine waters are generally characterized by a high abundance of CDOM, mineral particles, or both and thus, known to have strong light absorption towards shorter wavelengths, sometimes even in the green region. In contrast, the light absorption in the red region usually remains minimal for CDOM and mineral particles. As a result, the green band can be considered as a pilot band to capture variations in dissolved or mineral particle absorption, whereas the red band as a reference band. Hence, small variations in the GRBR are suitable to capture large variations in absorption at shorter wavelengths due to the exponential nature of CDOM and particle absorption. Similar band ratio (RGCI-red to green chlorophyll index) has been used in a semianalytical approach to obtain chlorophyll-a concentration for estimating phytoplankton absorption a<sub>0</sub>670 and subsequently, a<sub>tray</sub> 670 in the productive waters of Tampa Bay, USA (Le et al., 2013). The red to green band ratio (RGBR) works well to quantify variations in chlorophyll concentrations, especially in phytoplankton-dominated waters. Therefore, the GRBR (or RGBR) can be overall associated with the dominant water constituent in the study area. However, optically active water constituents collectively contribute to total light absorption and hence, these band ratios can also be used for the remote estimation of atmw at green wavelengths, especially in estuarine waters where variations in total absorption coefficients are often noticeable due to high abundance of one or more (e.g., CDOM and particles) water components. A ratio of Rrs at the red and green wavelengths (e.g., 640/645 nm and 555 nm of MODIS) was previously used in the standard QAA to improve the estimates of a<sub>mw</sub> at a reference wavelength (e.g., 555 nm for MODIS) in turbid waters, which worked reasonably in coastal waters (Lee et al., 2002; Chen and Zhang, 2015). The processing of high spatial resolution I-1 band (640 nm; spatial resolution: 375 m) is not supported by NASA's SeaDAS tool; therefore, our analysis was limited to the available ocean color bands (M1 to M5; spatial resolution: 750 m).

10

15

20

Additionally, selection of the reference wavelength in Eq. 5 is another important factor affecting the retrieval of IOPs in QAA. The use of a reference wavelength at red wavelengths (e.g., >600 nm) was suggested for the relatively turbid coastal waters where particulate and dissolved absorption is much lower than water

absorption (Lee et al., 2002; Aurin and Dierssen, 2012). We used 555 nm as a reference wavelength for three reasons, 1) lack of absorption measurements at red wavelengths (e.g., IES dataset) to tune empirical models (Table 2 – Level 1B), and 2) the use of red reference wavelength would likely deteriorate the estimations in the blue wavelengths due to errors in spectral extrapolation corresponding to the empirical nature of backscattering power law exponent,  $\eta$ , and 3) a strong relationship between green to red band ratio and total non-water absorption at 555 nm is observed in this study.

Once,  $u(\lambda_0)$  is obtained as the positive root of Eq. 3 using  $Rrs^{0-}$  and the coefficient  $g_0$  and  $g_1$ , backscattering coefficient at a reference wavelength  $(b_{btnw}(\lambda_0))$  can be easily obtained with  $u(\lambda_0)$ ,  $a_{tnw}(\lambda_0)$ , and the following analytical model (Table 2 – Level 1C0),

10 
$$b_{\text{btnw}}(\lambda_0)(m^{-1}) = \left(\frac{u(\lambda_0)}{1 - u(\lambda_0)}\right) \times (a_{\text{tnw}}(\lambda_0) + a_{\text{w}}(\lambda_0)) - b_{\text{bw}}(\lambda_0)$$
(6)

5

where,  $a_w$  and  $b_{bw}$  are water absorption and backscattering coefficients, respectively. The spectral distribution of particulate backscattering coefficient ( $b_{btnw}$ ) can be modeled using the power-law model (Lee et al., 2002) (Table 2 – Level 1C2),

$$b_{bt}(\lambda) (m^{-1}) = b_{bw}(\lambda) + b_{btnw}(\lambda_0) \times \left(\frac{\lambda_0}{\lambda}\right)^{\eta}$$
(7)

where  $\eta$  is the spectral shape of  $b_{btnw}$  distribution.\_The standard QAA-v6 uses the following empirical model to obtain  $\eta$ ,

$$\eta = 2 \times \left(1 - 1.2 \times e^{\left(-0.9 \times \frac{R_{rs}^{0} - (443)}{R_{rs}^{0} - (555)}\right)}\right)$$
 \_\_(8)

The variation of power law exponent η depends on water properties and size of particles according to 20 Mie theory and it is extremely difficult to retrieve η from Rrs in near-shore waters (Aurin and Dierssen, 2012). Thus, we adopted a different approach of obtaining η from b<sub>btnw</sub>555 with a linear relationship that was formulated using field observations in the turbid waters near the Mississippi River's delta (D'Sa et al., 2007) (Table 2 – Level 1C1),

$$\eta = -0.566 - 1.395 \times log_{10}(b_{btnw}555)$$
 \_\_(9)

25 The spectral distribution of total absorption coefficients was then obtained using b<sub>btnw</sub> and u (Table 2 – Level 1C3),

$$a_{t}(\lambda)(m^{-1}) = \left(\frac{1 - u(\lambda)}{u(\lambda)}\right) \times b_{bt}(\lambda) \tag{10}$$

Formatted: Right: -0.03"

Formatted: Indent: First line: 0.5", Don't adjust space between Latin and Asian text

To extend and to evaluate the applicability of estuarine-specific QAA tuning, it was further applied tovarious ocean color (Sentinel3 OLCI, MODIS-Aqua, MERIS, and SeaWiFS) and land-observing sensors
(Landsat8 OLI and Sentinel2 MSI). The calibration coefficients for obtaining total non-water absorption
coefficient at a reference wavelength ( $a_{true}$  ( $\lambda_0$ ); Level 1B in Table 2) are given in Table 3.

## 2.4 Atmospheric-correction of satellite satellite imagery

10

20

<u>-Level-1</u> <u>satellite</u> imagery were corrected for the atmosphere using SeaDAS 7.4 image processing tool as described previously (Joshi et al., 2017a) and mean values of a 3x3 pixel box centered at a station location were considered as reasonable satellite matchups for the field measurements. In addition, in-situ Rrs were matched to the central wavelengths of spectral bands using spectral response functions of respective satellite sensors prior to the sensor-specific tuning and validation,

$$R_{rs_{RSR}}(sr^{-1}) = \frac{\int_{\lambda_1}^{\lambda_2} RSR(\lambda) \times R_{rs_{insitu}}(\lambda) d\lambda}{\int_{\lambda_1}^{\lambda_2} RSR(\lambda) d\lambda}$$
 (11)

where RSR = relative spectral response for <u>satellite sensor</u>,  $\lambda_1$  is the lower bound of a spectral band and  $\lambda_2$  is the upper bound of a spectral band.

An iterative NIR atmospheric correction scheme was previously evaluated for estuarine environments (Bailey et al., 2010; Werdell et al., 2010; Joshi et al., 2017a); however, it yielded negative Rrs at blue wavelengths and atmospheric-correction failure at several pixels in Galveston Bay. In comparison, the errors in atmospheric-correction were considerably reduced with the MUMM NIR correction as it was designed for low to moderate turbid waters (Ruddick et al., 2006; Novoa et al., 2017). Furthermore, the validation of atmospheric-corrected VIIRS imagery showed reasonable performance of the MUMM atmospheric-correction scheme during both field campaigns in Galveston Bay (Table 44). The MRE, which was relatively higher at the blue wavelengths, was greatly reduced towards the green and red wavelengths. Thus, the success of the atmospheric correction procedure was decided based on the green and red bands, since only these bands were used to tune QAA in this study. However, the observed large errors at other wavelengths (e.g., blue bands) were likely due to the high abundance of CDOM and particles in the study region, and the aerosol model selection in the atmospheric correction procedure (Minu et al., 2014). The time-difference between field and satellite measurements resulted in an error enhancement at longer wavelengths with relatively smaller errors in October (difference=\_0 day) and larger errors in September (difference=\_+1 day) (Table 44). Overall, low MRE in the

green and red wavelengths indicated the usefulness of the MUMM atmospheric-correction for investigating the bio-optical properties with QAA-V processing chain and VIIRS ocean color data in Galveston Bay (USA).

## 2.5 Statistical analysis

The algorithm's performance and atmospheric-corrected VIIRS imagery were evaluated using coefficients of determination ( $R^2$ ), root mean square error (RMSE<sub>log10</sub>), bias (Bias<sub>log10</sub>), and absolute mean relative error (MRE),

$$Bias_{log10} = \frac{1}{n} \times \sum_{i=1}^{n} [log_{10}(y_i) - log_{10}(x_i)]$$
 (12)

$$RMSE_{log10} = \sqrt{\frac{1}{n} \times \sum_{i=1}^{n} [log_{10}(y_i) - log_{10}(x_i)]^2}$$
\_\_(13)

MRE (%) = 
$$\frac{100}{n} \times \sum_{i=1}^{n} \left[ \left| \frac{y_i - x_i}{x_i} \right| \right]$$
 \_\_\_\_\_(14)

R software was used to generate synthetic IOPs for Hydrolight® case-2 model and the statistical analysis presented in this study.

## 3 Results

15

#### 3.1 Modifications to standard QAA algorithm

A new set of  $g_0$  (0.0788) and  $g_1$  (0.2379) obtained using Hydrolight<sup>®</sup> simulated IOPs and Rrs is proposed for the highly attenuating waters of this study. These coefficients showed a notable departure of the quadratic relationship, especially in highly scattering waters when compared to Gordon et al. (1988) and Lee et al. (1999; 2002) (Fig. 3a). We used the historical values  $g_0$  (0.0895) and  $g_1$  (0.1245) for less reflecting near-shore and shelf waters (i.e., threshold  $\rho \ge 0.25$ ) in the validation analysis (Fig. 3b). Overall, the threshold-based selection of u vs. Rrs<sup>0-</sup> model showed a valid retrieval of u ( $\approx b_{bt}/(a_t+b_{bt})$ ) as seen when u was analytically used to obtain total absorption coefficient ( $a_t$ 555) and total backscattering coefficients ( $b_{bt}$ 555) (HL dataset) and vice versa (Fig. 4a & 4b; Table 2 – Level 1A).

The performance of QAA-V was largely dependent on the estimation of total non-water absorption coefficient ( $a_{tnw}$ ) in level 1B (Table 2). In this study, the empirical model of standard QAA-v6 (Eq. 5) was replaced by a tuned empirical power-law relationship using a training set (IES; N=121; Table 1) of in\_-situ observations and Hydrolight® synthetic data (HL; N=561),

$$a_{tnw}(\lambda_0) = \begin{cases} 10^{(0.139 - 1.788 \times \rho + 0.490 \times \rho^2} & \text{if } \rho < 0.25 \\ 10^{(0.406 - 2.940 \times \rho + 0.928 \times \rho^2} & \text{if } \rho \ge 0.25 \end{cases}; \ \rho = \log_{10} \left( \frac{R_{rs}^{\ 0^-}(\lambda_0)}{R_{rs}^{\ 0^-}(\lambda_1 \lambda_2)} \right)$$
 (15)

where  $a_{tnw}$  is total non-water absorption coefficient and  $\lambda_0 = 551$  or 555 nm and  $\lambda_1 = 671$  nm.

A threshold value of 0.25 was set for o to merge HL and IES datasets excluding the NOMAD dataset (Fig. 3b). The a<sub>truv</sub>555 (ρ>1.0) nearly reached the lower limit close to zero for oceanic waters likely due to low concentrations of reflecting and absorbing materials. Thus, we suggest the upper threshold of  $\rho$ =0.65 beyond which level 1B fails and overestimates water  $a_{\rm mw}(\lambda_0)$ . Likewise, negative  $\rho$  values of synthetic data represented CDOM-rich waters with very strong absorption even at the green wavelengths (e.g., 555 nm). For HL data, the modeled a<sub>truw</sub>555 showed a reasonable performance of the green to red band ratio model (MRE=16.3 %, bias<sub>log10</sub>=-0.0208, RMSE<sub>log10</sub>=0.0963 m<sup>-1</sup>, N=561) (Fig. 4c). The performance of the empirical model, however, showed a significant difference within the IES training data (R<sup>2</sup>=0.90, MRE=21 %, bias<sub>log10</sub>=-0.0015,  $RMSE_{log10} = 0.12 \text{ m}^{-1}$ , N=120) and testing data (R<sup>2</sup>=0.72, MRE=34 %, bias<sub>log10</sub> = -0.0294, RMSE<sub>log10</sub>=0.19 m<sup>-1</sup>, N=209) (Fig. 4d).

## 3.2 Comparison of OAA-V with the standard OAA-v6

15

The QAA-v6 algorithm was applied separately on HL synthetic data and IES field observations for a direct comparison with QAA-V in retrieving optical properties in estuarine waters. Figure 4e shows the performance of QAA-v6 in estimating total non-water absorption coefficient at 555 nm (atmw555) with HL synthetic data. In comparison to QAA-V, the QAA-v6 showed an obvious underestimation at 555 nm especially for atmw555>~0.3 m<sup>-1</sup>. Statistical assessment showed that QAA-V is more accurate than the QAA-v6 with approximately 83 % less bias, 35 % decreased RMSE, and 1.5-fold lower MRE (Fig. 5, Supplementary S2). For IES data, the QAA-v6 showed a clear difference with poor performance at several stations (Fig. 4f) as compared to QAA-V (Fig. 4d). 20 Furthermore, the retrieval errors were large towards upper and lower ends (e.g. a<sub>mw</sub>555 >~0.3 m<sup>-1</sup> and <~0.1 m<sup>-1</sup>). Overall, the QAA-v6 had an obvious underestimation with approximately 75 % greater bias, 31 % increased RMSE, and 2-fold higher MRE than the QAA-V at 555 nm (Fig. 5, Supplementary S2).

#### 3.3 Evaluation of OAA-V on synthetic HL data, NOMAD data, and IES data

Hydrolight® simulated case-2 water Rrs<sup>0+</sup> spectra were fed into QAA-V to derive a<sub>trus</sub> and b<sub>btrus</sub> at 411 nm, 443 nm, 489 nm, and 555 nm (Fig. 6). Although a negative bias indicated overall underestimation of modeled absorption coefficient at 555 nm (Fig. 4c), QAA-V performed satisfactorily in the blue region (Fig. 6a). Furthermore, the modeled atm at the blue wavelengths showed relatively lower MRE<13 % and  $RMSE_{log10}$ <0.075 m<sup>-1</sup> despite the errors in modeled  $a_{ttw}$ 555 at values less than 0.3 m<sup>-1</sup> (relatively low CDOM and mineral particle abundance), indicating the secondary importance of the green reference wavelengths in transferring errors to the blue wavelengths in QAA-V's processing chain as compared to the red reference wavelengths (Aurin and Dierssen, 2012). Similarly, QAA-V also estimated  $b_{btnw}$  with MRE<16 % at four wavelengths (Fig. 6b). When compared to the QAA-v6, QAA-V performed with approximately 80–90 % lower bias, 30-40 % reduced RMSE, and 1–2-fold decreased MRE at blue wavelengths (Fig. 5, Supplementary S2). QAA-V's performance on standard NOMAD dataset showed that the MRE was <30 % for all blue wavelengths with  $a_{tnw}$ 443 being the best-retrieved parameter ( $R^2$ =0.94, MRE=24.3 %, N=547). However, large errors were observed for  $a_{tnw}$ <0.1m<sup>-1</sup> at all wavelengths (Fig. 7a).

For field validation, Rrs<sup>0+</sup> spectra from 15 experiments of IES data were fed to QAA-V for obtaining a<sub>tnw</sub>443 and b<sub>btnw</sub>532 (Fig. 7b and 7c; Table 1). Modeled IOPs showed overall good results for a<sub>tnw</sub>443 (MRE=15 % for training data and 23 % for testing data; Fig. 7b) and b<sub>btnw</sub>532 (MRE=32 % for all data and 26 % for all data except Apalachicola Bay; Fig. 7c). A further analysis of individual datasets showed noticeable variations in MRE. For example, MRE varied from ~11–24 % among five best performing datasets for estimating a<sub>tnw</sub>443, whereas it varied from ~40–75 % for three poorly performing datasets with preliminary processing status (Table 1). On the IES data, QAA-V showed fewer errors in retrieving water IOPs than QAA-v6 (Fig. 5, Supplementary S2).

## 3.4 SPM-b<sub>btnw</sub>532 relationship and validation

20

A linear relationship ( $R^2$ =0.89; N=33) was observed between  $b_{btnw}$ 532 and SPM (Eq. 16; Fig. 7d). It was used for evaluating the applicability of QAA-V to get synoptic maps of SPM using VIIRS ocean color sensor in estuarine environments.

SPM = 
$$103.07 \times (b_{btnw}532) + 0.24$$
; where  $b_{btnw}532 = backscattering coefficient at 532 nm (16)$ 

It is important to note that the backscattering sensor had an upper threshold of 0.23 m<sup>-1</sup> where the sensor saturated and failed to detect variability in SPM; however, the linearity in SPM–b<sub>bmw</sub>532 relationship was assumed beyond the threshold (0.23 m<sup>-1</sup>) in this study. The SPM–b<sub>bmw</sub>532 relationship was compared to a similar relationship developed in turbid coastal waters of the Mississippi River (D'Sa et al., 2007) and a generic multisensor algorithm (Nechad et al., 2010) using IES dataset (Fig. 7e; Table 2). The three algorithms showed quite similar trends despite different water properties of the IES dataset. When compared to field observations of SPM in Apalachicola Bay, Barataria Bay, and Galveston Bay, these algorithms showed good performance with

the lowest error for the single wavelength generic algorithm of Nechad et al. (MRE=32.1 %, N=57) and the highest error for SPM-b<sub>btow</sub>555 relationship of D'Sa et al. (MRE=38.8 %, N=57) (Fig. 7e).

## 3.5 Evaluation of QAA-V in a turbid estuarine environment

The SPM-b<sub>btnw</sub>532 relationship of this study was applied to VIIRS imagery for evaluating satellite-based application of QAA-V in a turbid estuarine environment (Fig. 8). The regional SPM-b<sub>btnw</sub>532 relationship showed ~35 % overall MRE in satellite-field comparison (Fig. 8a) for Galveston Bay during the two field campaigns (Figure 8b-d). Both field and estimated SPM concentrations followed a similar pattern of high to low values along the north-to-south transect. A large-to-small error trend from September 30 (MRE=39.9 %) to October 30 (MRE=26.6 %) was similar to the error trend in the atmospheric-correction of the VIIRS imagery (Table 44). Based on these results, a sequence of cloud-free and atmospherically-corrected VIIRS imagery were converted to SPM maps using the QAA-V processing chain (Table 2) for analyzing post-hurricane SPM dynamics in Galveston Bay (Fig. 9).

## 3.6 Extending the QAA-V tuning to various satellite sensors

The estuarine-specific green to red band tuning was further applied to evaluate and to extend its applicability to past and present ocean color (e.g., SeaWiFS, MERIS, MODIS-Aqua, and Sentinel3 OLCI) and land-observing sensors (Landsat8 OLI and Sentinel2 MSI) (Table 3). The validation analysis showed promising performance of QAA tuning in obtaining total non-water absorption coefficient (a<sub>tmw</sub>443) and total-non water backscattering coefficient (b<sub>btmw</sub>470) in optically complex and shallow waters of Galveston Bay (Fig. 10). Overall, different satellite sensors showed similar trends of a<sub>tmw</sub>443 and b<sub>btmw</sub>470 along the transect despite having different spectral and spatial sensor resolutions (Fig. 10I – 10IV). The MREs were ~15 %, 9 %, and 12 % for a<sub>tmw</sub>443 retrievals from VIIRS, MODIS-A, and Sentinel3 OLCI sensors, respectively (Fig. 10a-c & 10I), whereas they were ~26 %, 7 %, 22 % for b<sub>btmw</sub>470 retrievals on October 29, 2017 (Fig. 10f-h & 10III). For Landsat8 OLI, these MRE were ~20 % and ~10 % for a<sub>tmw</sub>443 and b<sub>btmw</sub>470, respectively on September 29, 2017 (Fig. 10e, 10j, 10II, & 10IV).

#### 4. Discussion

15

20

# 25 4.1 QAA-V algorithm

The standard QAA (Lee et al., 2002) was <u>first</u> tuned with VIIRS sensor bands as QAA-V<u>and then extended to</u> other satellite sensors to obtain more accurate estimates of water IOPs (e.g., total absorption and backscattering

coefficients) in shallow estuarine and near-shore waters. For this purpose, two modifications were applied to the QAA, 1) the coefficients  $g_0$  and  $g_1$  of a quadratic model were updated using Hydrolight<sup>®</sup> simulations for highly absorbing and highly scattering waters (Eq. 3, Fig. 3a), and 2) an empirical model of QAA for obtaining total absorption coefficient at a reference wavelength was replaced by a set of empirical models that were optimized for highly attenuating estuarine and near-shore waters (Eq. 15, Fig. 3b). The validity of these modifications is demonstrated in Figure 4. The updated coefficients,  $g_0$  and  $g_1$ , showed a significant departure from historical values (Gordon et al., 1998; Lee et al., 1999; 2002) especially at green and red wavelengths in highly attenuating waters. Likewise, these coefficients were updated using a synthetic dataset representing highly attenuating waters and they may not perform satisfactorily in less reflective near-shore and coastal environments. This limitation was addressed by adopting a water-type switching of u vs. Rrs<sup>0-</sup> algorithm based on a green to red band ratio threshold ( $\rho$ ) in the QAA-V processing chain (Table 2). The effectiveness of tuning  $g_0$  and  $g_1$  is also supported by a previous study showing an ~5-fold bias reduction in obtaining total non-water IOPs at 440 nm (Aurin and Dierssen, 2012).

10

15

Overall, negative bias for HL datasets indicated that the threshold-based empirical models underestimated the a<sub>tmw</sub>555; however, a major error in the model performance was observed at the lower end of absorption of values, likely due to two reasons, 1) the failure of the threshold (ρ) in providing a smooth switching of empirical relationships between the highly absorbing and scattering waters (synthetic HL dataset) and estuarine and near-shore waters (IES dataset) (Fig. 4b), and 2) the unsuitability of green to red band ratio based empirical relationship for some Rrs spectra in the HL synthetic data (e.g. a<sub>tmw</sub>555<0.3 m<sup>-1</sup>) (Fig. 4a). In contrast, both empirical relationships worked reasonably well in providing a smooth transition from near-shore waters to highly turbid and highly absorbing waters of the IES data (Fig. 4b). However, the large differences within an IES dataset (e.g., training data and test data) could be explained by the processing status of different individual experiments in the IES dataset (Table 1). Training data included Rrs Rrs measurements in the final processing status from two well-known experiments, namely, EcoHAB (N=74) and Tampa Bay monitoring program (N=47) (Table 1). Individual absolute mean relative errors (MRE) for these data are 24 % and 16 %, respectively. In contrast, few datasets used in the testing set were in the preliminary processing stage with MRE>35 % (e.g., Chesapeake Bay–Light house, Horn Island, Cojet 7, and Lake Erie).

The validation of QAA-V in a variety of waters yielded reasonable performance as shown in Figures 6 and 7. For HL dataset, an error difference ( $\sim$ 2 %) between  $a_{tnw}$  (Fig. 6a) and  $b_{btnw}$  (Fig. 6b) could be associated with errors in levels 0 and 1A of the QAA processing chain (Table 2). The effect of this systematic error ( $\sim$ 1–2 %) is also present in the estimates of backscattering coefficients at blue wavelengths; this could be due to

uncertainties in various parameters of the semi-analytical power law model such as the power-law exponent n (Table 2; Level 1C1). It has previously been shown that  $\eta$  is important for obtaining  $b_{h}$  and its tuning can be responsible for an ~4-fold decrease in the percentage difference for b<sub>bt</sub>440 in estuarine waters than QAA's η model (Eq. 8) (Aurin and Dierssen, 2012). As we used a linear model based on behaw (Λο) behaw (Λο) for η (D'Sa et al., 2007), the modeled backscattering coefficient may suffer from the errors due to uncertainties in the empirical estimation of power law exponent.  $\eta$  does not play any role in retrieving  $b_{\text{bunw}} \frac{(\lambda_0)}{(\lambda_0)} = 551 - (\lambda_0)$  and hence, errors associated with  $\eta$  should not affect modeled  $b_{btnw}(\underline{\lambda_0})$ . However, the errors in  $\eta$  may affect the retrieval of b<sub>btnw</sub> at other wavelengths (e.g., b<sub>btnw</sub> 470 b<sub>btnw</sub> 470) (Table 2). For the NOMAD dataset, the observed large MRE in relatively clearer waters  $(a_{tmw}<0.1 \text{ m}^{-1})$  can be due to the fact that the empirical relationships for modeling  $a_{tmw}(\lambda_0)$  was not designed to work with very low values of non-water absorption coefficients, as generally observed in the shelf and oceanic environments (Fig. 7a; Eq. 5). For IES datasets, the retrieval of a<sub>tmw</sub>443 is obviously improved compared to atmw555 (Figs. 4d and 7b); however, 1 to 2-fold increase in errors is observed in IOP retrieval when QAA-V is applied to the field data in contrast to synthetic data. This error enhancement can be due to several factors including, 1) failure to achieve a smooth switching between highly absorbing and reflecting waters and estuarine and near-shore waters in real data (Fig. 4a), 2) inclusion of preliminary data in validation analysis (Table 1), 3) the uncertainty propagation of the previous levels of the OAA-V processing chain (e.g., errors in various empirical, semi-analytical, and analytical relationships) (Table 2), and 4) the difference in methodology of data collection, raw data processing, instrumentation, and measurement and instrument errors. For example, reflectance measurements, the primary input of OAA-V, can have large errors if measured in turbid waters and with large viewing angles (Lee et al., 1999), while bottom contamination may introduce an additional error since in-situ data represent shallow water environments. The bottom effect could probably be reduced with sophisticated correction schemes (Lee et al., 1999; Li et al., 2017; Lee et al., 1998).

A statistical comparison showed that the QAA-V provided better estimations of IOPs than the standard QAA-v6 in estuarine and near-shore waters (Fig. 5). Also, a green to red band ratio is better suited for satellite application of QAA in shallow waters due to <u>fewer errorsfewer errors</u> in these bands (Table <u>44</u>). In contrast, several studies have demonstrated an over-estimation in blue bands in turbid waters, likely due to errors in the atmospheric-correction (Joshi et al., 2017a; Chen and Zhang, 2015 and reference therein). This over-estimation could lead to the observed underestimation of  $a_{tnw}555$  and subsequently, the underestimation of  $a_{\underline{\phantom{-}}}$  and  $b_b$  at different wavelengths in lower levels of the QAA processing chain (Fig. 5, Table 2).

## 4.2 The SPM optical model

10

Traditionally, suspended particulate matter (SPM) has been retrieved from remote sensing imagery using single or multiband empirical relationships between above-surface Rrs and SPM concentrations (Doxaran et al., 2002; Miller & McKee, 2004; D'Sa et al., 2007; Han et al., 2016). While empirical relationships are easy to implement, they are regionally limited and may cause large errors if applied to different waters due to differences in particle properties such as absorption, particle size and composition, and refractive index. Furthermore, above-surface Rrs, even at red and NIR wavelengths where particle attenuation controls the Rrs signal, is not a "true" representation of particles as Rrs signal is also marginally contributed by absorption of water and other optically active materials. Hence, this approach has limitation as it can have robust performance only in particle-dominated waters. Another way for estimating SPM concentration is to relate to particle backscattering coefficients (b<sub>bp</sub>). Several studies have reported efficacy of this approach in estimating concentrations of total suspended material (TSM) and particulate organic carbon (POC) in a variety of waters ranging from estuarine to open oceans (Stramski et al., 1999; Loisel et al., 2001; Aurin and Dierssen, 2012).

10

15

When the SPM-b<sub>btnw</sub>532 relationship was applied to the VIIRS imagery, both field and satelliteestimated SPM concentrations showed a similar pattern of high to low along a north-to-south transect in Galveston Bay; however, the differences remained elevated in the turbid region of Trinity Bay (st-2 to st-6 in Fig. 8b and st-16 to st-23 in Fig. 8c). Factors contributing to these differences include, 1) the error propagation from various steps of the QAA-V processing chain to b<sub>htm</sub> 532 (e.g., 20–30 %, Fig. 7c) and hence, further down to the SPM inversion, 2) the uncertainty in the atmospheric-corrected green and red Rrs (e.g., 5–20 %, Table 4), 3) the uncertainty in SPM-b<sub>btnw</sub>532 relationship due to limited observations, 4) the assumption of linearity in SPMb<sub>btnw</sub>532 model beyond the instrument threshold which may not hold well because b<sub>btnw</sub>532 to SPM ratio depends on the particle nature and it may not always be constant especially in highly turbid waters, and 5) errors in SPM measurements. For example, SPM is usually measured with 0.7-um (average pore size) GFF filter, which only represents the total concentration of particles greater than this size. However, while smaller particles may not have significant contributions to the mass-specific property of SPM (e.g., concentration), particles smaller than this size can contribute notably to the underestimation of SPM concentrations in highly turbid waters (Supplementary S3). Furthermore, small particles and even colloidal particles (<0.2 µm) are known to contribute significantly to the total particle backscattering in coastal waters (Zhang and Gray, 2015; Zhang et al., 2011). For instance, high winds associated with the passage of a cold front on October 28, 2017 (not shown) could have resulted in resuspension of smaller particles at the shallower stations on October 29 (Fig. 8c) and contributed to greater differences between satellite estimates and field SPM measurements. Interestingly, on the following day (October 30) under calmer conditions, the differences reduced substantially (Fig. 8d). Thus, the mismatch

between mass-specific and optical properties could be a major source of error in the SPM-b<sub>btm</sub>532 relationship and hence, the observed difference in field-satellite matchups.

## 4.3 Satellite application of QAA-V to Galveston Bay: post-Hurricane Harvey SPM dynamics

10

15

A sequence of SPM maps derived from VIIRS imagery using QAA-V revealed interesting patterns of SPM concentrations in Galveston Bay following Hurricane Harvey (Figs. 8 & 9). Hurricane Harvey, a category 4 hurricane, caused catastrophic flooding in the Houston metropolitan area and surrounding regions of Galveston's Bay drainage basin with great potential to degrade the bay's water quality.

The dramatic increase in the discharge of water from the Trinity and San Jacinto Rivers into Galveston Bay (Fig. 9a) following the record rainfall and flooding associated with Hurricane Harvey reveals different patterns of discharge, with the San Jacinto River peaking and retreating to pre-hurricane levels much quicker than the Trinity River. This reflects the differences of the two river basins, as well as the intensity and variability of the precipitation associated with the hurricane in the two basins. A sequence of post-hurricane SPM maps of Galveston Bay (Fig. 9b-9g) reveals distinct spatial and temporal patterns of SPM variations within and outside the bay including the offshore shelf waters that appeared to be strongly influenced by the river discharge and wind forcing. The immediate effect of Hurricane Harvey was clearly evident on August 31 when unusually high SPM concentrations (>75 mg L<sup>-1</sup>) were observed throughout the bay corresponding to high freshwater inputs from the Trinity and the San Jacinto Rivers into Galveston Bay (Fig. 9a & 9b). The SPM-rich plume (>75 mg L<sup>-1</sup>) extended from the Bolivar Roads pass to a large region of the coastal and shelf waters. In contrast, the bay experienced elevated SPM concentrations on September 02, but the plume was limited by wind forcing and a reduction in freshwater to the bay (Fig. 9a & 9c).

The strong northeasterly winds (~5–6 m s<sup>-1</sup>) observed on September 07 and 08 appeared to restrict the SPM plume closer to the bay entrance and the inner shelf waters (Fig. 9d & 9e). Despite the reduced freshwater inflow into the upper Galveston Bay, sustained fresh water inputs from the Trinity River (~500 m³ s<sup>-1</sup>) and strong northeasterly winds (e.g. sediment resuspension) could have resulted in elevated SPM concentrations throughout the bay. Furthermore, wind-induced downwelling currents appeared to transport low SPM offshore waters near-shore while the high SPM near-shore and plume waters were likely downwelled and could have eventually settled into the shelf sediments.

Despite the noticeable reduction in the Trinity River flow, SPM concentrations remained high within the bay on September 12, indicating the importance of wind-induced sediment resuspension on SPM dynamics in the

shallow\_ewater environments. However, outside the bay, a well-defined and elevated SPM plume extended offshore, likely associated with the southwesterly winds which induced offshore transport of the inner shelf waters (Fig. 9f). On September 16, total fresh water inflow to Galveston Bay was reduced significantly (~500 m<sup>3</sup> s<sup>-1</sup> to ~100 m<sup>3</sup> s<sup>-1</sup> in the Trinity River) with SPM generally reduced throughout the bay. However, Trinity Bay and East Bay showed relatively higher SPM than the upper and lower Galveston Bay (Fig. 9g), likely due to a more delayed discharge through the Trinity River and the wetlands.

Overall, the QAA-V based SPM maps of Galveston Bay showed distinct variations in SPM concentrations following Hurricane Harvey. Although the Trinity Bay and the upper Galveston Bay responded similarly a few days following the hurricane, distinct SPM patterns emerged (e.g., lower SPM in the western and higher in the eastern part of the bay) just after two weeks, suggesting different influences in the eastern and western parts of the bay. For example, flood waters from the Houston metropolitan and surrounding region appeared to have receded within a few days of the hurricane event (Fig. 9a), whereas the discharge of flood waters were elevated through the Trinity River over the course of several weeks after Hurricane Harvey. These flood waters could have accumulated first in wetlands and numerous water bodies in the eastern region and lower Trinity Basin during the hurricane event and eventually emptied to the main Trinity River channel. SPM was also elevated in the East Bay, but concentrations were generally lower within the within the first two weeks suggesting this region of the bay mostly remained isolated from the other regions of Galveston Bay. Nonetheless, this region receives discharge from the surrounding wetlands which could have been elevated during this period. Overall, wind forcing was also important in controlling the extent and the dispersal of the sediment-rich plume waters into the shelf and in contributing to the SPM variability within the bay due to sediment resuspension and its transport into the shelf waters.

## 4.4 Application of the QAA tuning to various ocean color and land observing sensors

10

15

Sensor-specific QAA tuning (e.g., QAA-V for VIIRS, MODIS, Landsat-8 OLI, and Sentinel3 OLCI) showed overall valid retrieval of absorption and backscattering coefficients with various ocean color and land-observation sensors (Fig. 10). Although satellite-derived values and trends of at the sensors, the observed discrepancies could have in addition to the uncertainties in field measurements due to several sources of errors. For example, it is well-known that satellite products suffer from large errors in the blue region especially in coastal waters due to atmospheric correction (Table 4; Supplementary S4). The large errors between field and Landsat8 OLI derived atmospheric correction due to the fact that the QAA processing chain

uses these erroneous blue Rrs values to obtain  $a_{inw}$  at the blue wavelengths (Table 2; Level 3). However, the  $b_{btnw}$  retrievals at the blue wavelengths are unaffected by the blue Rrs inputs (Table; Level 2). Likewise, the errors were relatively smaller at the reference wavelength (Table 4) because the proposed QAA tuning avoided using blue wavelengths in the primary step of getting  $a_{tnw}$  and  $b_{btnw}$  at a reference wavelength. Hence, the atmospheric correction procedure is an important step that would impact the performance of QAA-V in ocean color applications of shallow estuarine and near-shore waters.

Another important discrepancy among various sensor maps is the number of masked pixels in shelf waters (Fig. 10). We have used a VIIRS band-ratio based threshold ( $\rho$ =0.65) to separate green waters (e.g., productive coastal waters) and blue waters (e.g., open ocean) (Eq. 15) and applied it to various satellite sensors. Although this threshold worked well for the sensors with similar green and red bands (e.g., MODIS-A and VIIRS), it did not perform as well for Sentinel 3 OLCI and Landsat 8 OLI because of notable differences between the green and red bands of these sensors and the VIIRS sensor (Table 3). Thus, while the proposed threshold works well to represent estuarine and near-shore waters for various ocean color and land-observing sensors, it could be further optimized for each satellite sensor.

#### 15 5 Conclusions

A multiband quasi-analytical algorithm tuned for the VIIRS ocean color sensor (QAA-V) and for the estuarine and near-shore waters was proposed. Two major changes were applied to the standard QAA (Lee et al., 2002), 1) the coefficients  $g_0$  and  $g_1$  of a semi-analytical quadratic relationship were updated to obtain u from the Rrs (Eq. 1), and 2) a threshold-based empirical model was proposed using the green to red band ratio (GRBR) to estimate the total absorption coefficient at a reference wavelength. The QAA-V derived total absorption and backscattering coefficients showed a good relationship in a variety of waters ranging from highly turbid and highly absorbing (MRE<17 %) to relatively clearer coastal waters (MRE<30 %). Moreover, a reasonable performance (MRE<25 %) using in-situ estuarine and near-shore data indicated the usefulness of the GRBR in modeling total absorption coefficients in estuarine waters regardless of the dominance of one or more water constituent (e.g., CDOM, mineral particles, or phytoplankton). This band ratio needs to be explored further for other-various ocean color sensors and in different estuarine and near-shore environments around the world. The QAA-V may not perform satisfactorily in optically shallow waters as the empirical relationships were designed specifically for the optically deep environments. This study showed good retrieval of backscattering coefficients (MRE=~25–30 %); however, the errors increased towards the lower levels of the QAA-V processing chain (e.g.,

MRE= $\sim$ 35 % in estimating SPM) likely due to the lack of bb<sub>tnw</sub>–SPM matchups in variety of waters in formulating a robust SPM–b<sub>btnw</sub>532 relationship corresponding to estuarine waters. This limitation suggested suggests an immensea great need of in-situ backscattering measurements in various shallow environments and their availability for the public use.

The QAA-V and a regional SPM-b<sub>btnw</sub>532 relationship were applied to a sequence of VIIRS imagery for investigating post-hurricane SPM dynamics in Galveston Bay. Despite noticeable errors, especially in turbid regions of the bay, the application of QAA-V showed great potential in revealing the SPM patterns due to post-hurricane variations linked to freshwater inflow to the bay and wind forcing. A sequence of SPM maps after the passage of Hurricane Harvey showed that Galveston Bay received massive amounts of SPM due to large volumes of freshwater inputs from the two major rivers and surrounding regions. However, while the freshwater inflow reduced within a few days in the western part of the bay, it remained high over the course of several weeks in the eastern part of the bay providing evidence of the short-term storage capacity of wetlands and numerous freshwater reservoirs in the lower Trinity Basin. This discharge pattern coupled with different residence times in the western and eastern parts of the bay resulted in distinct SPM patterns in the two regions of the bay. Furthermore, while winds appeared to have played an important role in re-suspending sediments within the bay, they were critical in the transport and dispersion of sediments into the shelf waters of the Gulf of Mexico.

This study did not address bottom reflectance effects (e.g., during clear water conditions), Raman scattering, and chlorophyll fluorescence that may have degraded the QAA-V's performance. Furthermore, the tuning of the semi-analytical and empirical relationships (e.g.,  $\eta$  in Table 2) was not possible due to scarcity of field IOPs (e.g., backscattering measurements). Although, further refinements and validation studies are necessary to improve the performance and applicability of QAA-V in spatially and temporally distinct shallow waters around the world, the promising results of this study suggest that the eombination application of QAA-V with to various ocean color and land observation satellites can be a useful tool to reveal-assess the bio-optical state and water quality dynamics in a variety of shallow-watercoastal systems around the world.

## 25 Data availability

5

10

Data from field measurements are available upon request from the corresponding author.

#### **Competing interests**

The authors declare that they have no conflict of interest.

## Acknowledgements

We thank NASA Ocean Color Biology Processing Group (OBGP) for providing access to the VIIRS ocean color data. We also acknowledge NASA OBGP for SeaBASS data repository, and individual project PIs who made their bio-optical observations available for public use. We thank USGS and NOAA for providing various meteorological and hydrological data to support this work. The authors acknowledge NASA funding through grant No. 80NSSC18K0177. We are also thankful to two anonymous reviewers for their insightful comments and suggestions that greatly improved this manuscript.

#### References

15

- Álvarez-Romero, J. G., Devlin, M., da Silva, E. T., Petus, C., Ban, N. C., Pressey, R. L., Kool, J., Roberts, J. J.,

  Cerdeira-Estrada, S., and Wenger, A. S.: A novel approach to model exposure of coastal-marine ecosystems to riverine flood plumes based on remote sensing techniques, Journal of Environmental Management, 119, 194-207, 2013.
  - Aurin, D.A. and Dierssen, H.M.: Advantages and limitations of ocean color remote sensing in CDOM-dominated, mineral-rich coastal and estuarine waters, Remote Sensing of Environment, 125, 181-197, 2012.
  - Bailey, S. W., Franz, B. A., and Werdell, P. J.: Estimation of near-infrared water-leaving reflectance for satellite ocean color data processing, Optics Express, 18, 7521-7527, 10.1364/OE.18.007521, 2010.
  - Brewin, R. J. W., Sathyendranath, S., Müller, D., Brockmann, C., Deschamps, P.-Y., Devred, E., Doerffer, R., Fomferra, N., Franz, B., Grant, M., Groom, S., Horseman, A., Hu, C., Krasemann, H., Lee, Z., Maritorena, S., Mélin, F., Peters, M., Platt, T., Regner, P., Smyth, T., Steinmetz, F., Swinton, J., Werdell, J., and White Iii, G. N.: The Ocean Colour Climate Change Initiative: III. A round-robin comparison on in-water bio-optical algorithms, Remote Sensing of Environment, 162, 271-294, 2015.
  - Bricker, S. B., Longstaff, B., Dennison, W., Jones, A., Boicourt, K., Wicks, C., and Woerner, J.: Effects of nutrient enrichment in the nation's estuaries: a decade of change, Harmful Algae, 8, 21-32, 2008.
- 25 Carvalho, G. A., Minnett, P. J., Banzon, V. F., Baringer, W., and Heil, C. A.: Long-term evaluation of three satellite ocean color algorithms for identifying harmful algal blooms (Karenia brevis) along the west coast of Florida: A matchup assessment, Remote Sensing of Environvironment, 115, 1-18, 2011.

- Castillo, K. D., and Lima, F. P.: Comparison of in situ and satellite-derived (MODIS-Aqua/Terra) methods for assessing temperatures on coral reefs, Limnology Oceanography—, Methods, 8, 107-117, 2010.
- Cavanaugh, K. C., Siegel, D. A., Reed, D. C., and Dennison, P. E.: Environmental controls of giant-kelp biomass in the Santa Barbara Channel, California, Marine Ecology Progress Series, 429, 1-17, 2011.
- 5 Chen, J., Quan, W., Wen, Z., and Cui, T.: An improved three-band semi-analytical algorithm for estimating chlorophyll-a concentration in highly turbid coastal waters: a case study of the Yellow River estuary, China, Environtal Earth Sciences, 69, 2709-2719, 2013.
  - Chen, S., Huang, W., Wang, H., and Li, D.: Remote sensing assessment of sediment re-suspension during Hurricane Frances in Apalachicola Bay, USA, Remote Sensing of Environment, 113, 2670-2681, 2009.
- 10 Chen, S., and Zhang, T.: Evaluation of a QAA-based algorithm using MODIS land bands data for retrieval of IOPs in the Eastern China Seas, Optics Express, 23, 13953-13971, 10.1364/OE.23.013953, 2015.
  - D'Sa, E. J., and Miller R. L.: Bio-optical properties in waters influenced by the Mississippi River during low flow conditions, Remote Sensing of Environment., 84, 538–549, 2003.
  - D'Sa, E. J., Miller R. L., and Del Castillo C.: Bio-optical properties and ocean color algorithms for coastal waters influenced by the Missis—sippi River during a cold front, Applied Optics, 45, 7410–7428, 2006.

20

- D'Sa, E. J., Miller, R. L., and McKee, B. A.: Suspended particulate matter dynamics in coastal waters from ocean color: Application to the northern Gulf of Mexico, Geophysical Research Letters, 34, 2007.
- D'Sa, E. J., Overton, E. B., Lohrenz, S. E., Maiti, K., Turner, R. E., and Freeman, A.: Changing Dynamics of Dissolved Organic Matter Fluorescence in the Northern Gulf of Mexico Following the Deepwater Horizon Oil Spill, Environmental Science & Technology, 50, 4940-4950, 2016.
- Dong, Q., Shang, S., and Lee, Z.: An algorithm to retrieve absorption coefficient of chromophoric dissolved organic matter from ocean color, Remote Sensing of Environment, 128, 259-267, 2013.
- Gordon, H. R., Brown, O. B., Evans, R. H., Brown, J. W., Smith, R. C., Baker, K. S., and Clark, D. K.: A semianalytic radiance model of ocean color, Journal of Geophysical Research: Atmospheres, 93, 10909-10924, 1988.
- Doxaran, D., Froidefond, J.M., Lavender, S. and Castaing, P.: Spectral signature of highly turbid waters: Application with SPOT data to quantify suspended particulate matter concentrations, Remote sensing of Environment, 81(1), 149-161, 2002.
- Guthrie, C. G., Matsumoto, J., and Solis, R. S.: Analysis of the influence of water plan strategies on inflows and salinity in Galveston Bay., United States Army Corps of Engineers, Texas Water Development Board, Austin, Texas., pp 71, 2012.

- Han, B., Loisel, H., Vantrepotte, V., Mériaux, X., Bryère, P., Ouillon, S., Dessailly, D., Xing, Q. and Zhu, J.: Development of a semi-analytical algorithm for the retrieval of suspended particulate matter from remote sensing over clear to very turbid waters, Remote Sensing, 8(3), 211, 2016.
- Haynes, D., Brodie, J., Waterhouse, J., Bainbridge, Z., Bass, D., and Hart, B.: Assessment of the Water-water Quality-quality and Ecosystem ecosystem Health health of the Great Barrier Reef (Australia): Conceptual Models models, Environmental Management, 40, 993-1003, 10.1007/s00267-007-9009-y, 2007.

- Hu, C., Luerssen, R., Muller-Karger, F. E., Carder, K. L., and Heil, C. A.: On the remote monitoring of Karenia brevis blooms of the west Florida shelf, Continental Shelf Research, 28, 159-176, 2008.
- Hu, C., Murch, B., Corcoran, A. A., Zheng, L., Barnes, B. B., Weisberg, R. H., Atwood, K., and Lenes, J. M.:
   Developing a smart semantic web with linked data and models for near-real-time monitoring of red tides in the Eastern Gulf of Mexico, IEEE Systems Journal, 10, 1282-1290, 2016.
  - IOCCG: Remote Sensing of Inherent Optical Properties: Fundamentals, Tests of Algorithms, and Applications, Reports of the International Ocean-Colour Coordinating Group, No. 5, IOCCG, Dartmouth, Canada, 2006.
- Joshi, I., and D'Sa, E. J.: Seasonal variation of colored dissolved organic matter in Barataria Bay, Louisiana, using combined Landsat and field data, Remote Sensing, 7, 12478-12502, 2015.
  - Joshi, I. D., D'Sa, E. J., Osburn, C. L., Bianchi, T. S., Ko, D. S., Oviedo-Vargas, D., Arellano, A. R., and Ward, N. D.: Assessing chromophoric dissolved organic matter (CDOM) distribution, stocks, and fluxes in Apalachicola Bay using combined field, VIIRS ocean color, and model observations, Remote Sensing of Environment, 191, 359-372, 2017a.
  - Joshi, I. D., D'Sa, E. J., Osburn, C. L., and Bianchi, T. S.: Turbidity in Apalachicola Bay, Florida from Landsat 5 TM and Field Data: Seasonal Patterns patterns and Response response to Extreme extreme Eventsevents, Remote Sensing, 9, 367, 2017b.
- Jutterström, S., Andersson, H. C., Omstedt, A., and Malmaeus, J. M.: Multiple stressors threatening the future of the Baltic Sea–Kattegat marine ecosystem: Implications for policy and management actions, Marine Pollution Bulletin, 86, 468-480, 2014.
  - Keith, D., Yoder, J., and Freeman, S.: Spatial and temporal distribution of coloured dissolved organic matter (CDOM) in Narragansett Bay, Rhode Island: implications for phytoplankton in coastal waters, Estuarine, Coastal and Shelf Science, 55, 705-717, 2002.

- Kjelland, M. E., Woodley, C. M., Swannack, T. M., and Smith, D. L.: A review of the potential effects of suspended sediment on fishes: potential dredging-related physiological, behavioral, and transgenerational implications, Environment Systems and Decisions, 35, 334-350, 10.1007/s10669-015-9557-2, 2015.
- Le, C., Hu, C., English, D., Cannizzaro, J., and Kovach, C.: Climate-driven chlorophyll-a changes in a turbid estuary: Observations from satellites and implications for management, Remote Sensing of Environment, 130, 11-24, 2013.

10

15

- Lee, Z., Carder, K. L., Mobley, C. D., Steward, R. G., and Patch, J. S.: Hyperspectral remote sensing for shallow waters. I. A semianalytical model, Applied optics Optics, 37, 6329-6338, 1998.
- Lee, Z., Carder, K. L., Mobley, C. D., Steward, R. G., and Patch, J. S.: Hyperspectral remote sensing for shallow waters: 2. Deriving bottom depths and water properties by optimization, Applied Optics, 38, 3831-3843, 10.1364/AO.38.003831, 1999.
- Lee, Z., Carder, K. L., and Arnone, R. A.: Deriving inherent optical properties from water color: a multiband quasi-analytical algorithm for optically deep waters, Applied opticsOptics, 41, 5755-5772, 2002.
- Lee, Z., Weidemann, A., Kindle, J., Arnone, R., Carder, K. L., and Davis, C.: Euphotic zone depth: Its derivation and implication to ocean-color remote sensing, Journal of Geophysical Research: Oceans, 112, 2007.
- Lee, Z., Lubac, B., Werdell, J., and Arnone, R.: An update of the quasi-analytical algorithm (QAA\_v5), International Ocean Color Group Software Report, 1-9, 2009.
- Lee, Z., Arnone, R., Hu, C., Werdell, P. J., and Lubac, B.: Uncertainties of optical parameters and their propagations in an analytical ocean color inversion algorithm, Applied Optics, 49, 369-381, 10.1364/AO.49.000369, 2010.
- Lee, Z., Hu, C., Shang, S., Du, K., Lewis, M., Arnone, R., and Brewin, R.: Penetration of UV-visible solar radiation in the global oceans: Insights from ocean color remote sensing, Journal of Geophysical Research: Oceans, 118, 4241-4255, 2013.
- Lester, L. J., and Gonzalez, L. A.: The State of the Bay: A <u>Characterization characterization</u> of the Galveston Bay <u>Ecosystemecosystem</u>, Texas Commission on Environmental Quality, Galveston Bay Estuary Program, Houston, Texas, 356 pp., 2011.
- Li, J., Yu, Q., Tian, Y. Q., and Becker, B. L.: Remote sensing estimation of colored dissolved organic matter (CDOM) in optically shallow waters, ISPRS Journal of Photogrammetry and Remote Sensing, 128, 98-110, 2017.

- Li, L., Li, L., Song, K., Li, Y., Tedesco, L. P., Shi, K., and Li, Z.: An inversion model for deriving inherent optical properties of inland waters: Establishment, validation and application, Remote Sensing of Environment, 135, 150-166, 2013.
- Liu, G., Strong, A. E., Skirving, W., and Arzayus, L. F.: Overview of NOAA coral reef watch program's nearreal time satellite global coral bleaching monitoring activities, Proceedings of the 10th International Coral Reef Symposium. June, 2006.
  - Loisel, H., Bosc, E., Stramski, D., Oubelkheir, K. and Deschamps, P.Y.: Seasonal variability of the backscattering coefficient in the Mediterranean Sea based on satellite SeaWiFS imagery, Geophysical Research Letters, 28(22), 4203-4206, 2001.
  - Lohrenz, S., Cai, W.-J., Chen, X., and Tuel, M.: Satellite <u>Assessment assessment of Biobio-Optical optical Properties properties of Northern northern Gulf of Mexico Coastal Waters waters Following Hurricanes hurricanes Katrina and Rita, Sensors, 8, 4135, 2008.</u>
  - Lucena, Z., and Lee, M. T.: Characterization of streamflow, suspended sediment, and nutrients entering Galveston Bay from the Trinity River, Texas, May 2014–December 2015: U.S. Geological Survey Scientific Investigations Report 2016–5177, Reston, VA, USGS Numbered Series, vii, 37-38 p., 2017.

20

- Matsumoto, K., Honda, M. C., Sasaoka, K., Wakita, M., Kawakami, H., and Watanabe, S.: Seasonal variability of primary production and phytoplankton biomass in the western Pacific subarctic gyre: control by light availability within the mixed layer, Journal of Geophysical Research: Oceans, 119, 6523-6534, 2014.
- Miller, R.L. and McKee, B.A.: Using MODIS Terra 250 m imagery to map concentrations of total suspended matter in coastal waters, Remote sensing of Environment, 93(1-2), 259-266, 2004.
- Minu, P., Lotliker, A. A., Shaju, S. S., Santhosh\_Kumar, B., Ashraf, P. M., and Meenakumari, B.: Effect of optically active substances and atmospheric correction schemes on remote-sensing reflectance at a coastal site off Kochi, International Journal of Remote Sensing, 35, 5434-5447, 10.1080/01431161.2014.926420, 2014.
- 25 Mishra, S., Mishra, D. R., Lee, Z., and Tucker, C. S.: Quantifying cyanobacterial phycocyanin concentration in turbid productive waters: A quasi-analytical approach, Remote Sensing of Environment, 133, 141-151, 2013.
  - Mitchell, C., Cunningham, A., and McKee, D.: Remote sensing of particulate absorption coefficients and their biogeochemical interpretation: A case study in the Irish Sea, Remote Sensing of Environment, 152, 74-82, 2014.

- Mobley, C. D.: Estimation of the remote-sensing reflectance from above-surface measurements, Applied Optics, 38, 7442-7455, 10.1364/AO.38.007442, 1999.
- Mobley, C. D., and Sundman, L. K.: Hydrolight Ecolight 5.2 user's guide, Sequoia Scientific, Inc., Bellevue, WA 2013.
- 5 Morel, A., and Gentili, B.: Diffuse reflectance of oceanic waters: its dependence on Sun angle as influenced by the molecular scattering contribution, Applied Optics, 30, 4427-4438.
  - Morel, A., and Gentili, B.: Diffuse reflectance of oceanic waters. II. Bidirectional aspects, Applied Optics, 32, 6864-6879.
  - Morel, A., and Gentili, B.: Diffuse reflectance of oceanic waters. III. Implication of bidirectionality for the remote-sensing problem, Applied Optics, 35, 4850-4862, 10.1364/AO.35.004850, 1996.

- Mueller, J.L., Davis, C., Arnone, R., Frouin, R., Carder, K., Lee, Z., Steward, R., Hooker, S., Mobley, C.D., McLean, S.: Above-<u>Water\_water\_Radiance\_radiance\_and\_Remote\_remote\_Sensing\_Reflectance\_reflectance\_Measurements\_measurements\_and\_Analysis\_analysis\_Protocolsprotocols.</u> Ocean Optics Protocols for Satellite Ocean Color Sensor Validation. Revision 4, pp. 21–31.
- Naik, P., D'Sa, E. J., Grippo, M., Condrey, R., and Fleeger, J.: Absorption properties of shoal-dominated waters in the Atchafalaya Shelf, Louisiana, USA, International Journal of Remote Sensing, 32:15, 4383-4406, 2011.
  - Nechad, B., Ruddick, K.G. and Park, Y.: Calibration and validation of a generic multisensor algorithm for mapping of total suspended matter in turbid waters, Remote Sensing of Environment, 114, 4, 854-866, 2010.
  - Neukermans, G., Ruddick, K., Loisel, H., and Roose, P.: Optimization and quality control of suspended particulate matter concentration measurement using turbidity measurements, Limnology and Oceanography: Methods, 10, 1011-1023, 2012.
  - Novoa, S., Doxaran, D., Ody, A., Vanhellemont, Q., Lafon, V., Lubac, B., and Gernez, P.: Atmospheric 
    Corrections corrections and Multimulti-Conditional Conditional Algorithm algorithm for MultimultiSensor Sensor Remote remote Sensing of Suspended Suspended Particulate particulate Matter 
    matter in Lowlow-to-High high Turbidity turbidity Levels levels Coastal Coastal Waterswaters, Remote 
    Sensing, 9, 61, 2017.
- Pan, X., Mannino, A., Russ, M. E., Hooker, S. B., and Harding Jr, L. W.: Remote sensing of phytoplankton pigment distribution in the United States northeast coast, Remote Sensing of Environment, 114, 2403-2416, 2010.

Pitarch, J., Bellacicco, M., Volpe, G., Colella, S., and Santoleri, R.: Use of the quasi-analytical algorithm to retrieve backscattering from in-situ data in the Mediterranean Sea, Remote Sensing Letters, 7, 591-600, 10.1080/2150704X.2016.1171922, 2016.

5

- Pu, R., and Bell, S.: Mapping seagrass coverage and spatial patterns with high spatial resolution IKONOS imagery, International Journal of Applied Earth Observation and Geoinformation, 54, 145-158, 2017.
- Qi, L., Hu, C., Cannizzaro, J., Corcoran, A. A., English, D., and Le, C.: VIIRS Observations of a Karenia brevis Bloom bloom in the Northeastern northeastern Gulf of Mexico in the Absence absence of a Fluorescence Fluorescence Bandband, IEEE Geoscience and Remote Sensing Letters, 12, 2213-2217, 2015.
- Qing, S., Tang, J., Cui, T., and Zhang, J.: Retrieval of inherent optical properties of the Yellow Sea and East China Sea using a quasi-analytical algorithm, Chinese Journal of Oceanology and Limnology, 29, 33-45, 2011.
- 15 Ralph, P., Durako, M. J., Enriquez, S., Collier, C., and Doblin, M.: Impact of light limitation on seagrasses, Journal of Experimental Marine Biology and Ecology, 350, 176-193, 2007.
  - Ramsey III, E., Rangoonwala, A., Suzuoki, Y., and Jones, C. E.: Oil detection in a coastal marsh with polarimetric synthetic aperture radar (SAR), Remote Sensing, 3, 2630-2662, 2011.
- Ruddick, K. G., De Cauwer, V., Park, Y.-J., and Moore, G.: Seaborne measurements of near infrared waterleaving reflectance: The similarity spectrum for turbid waters, Limnology and Oceanography, 51, 1167-1179, 2006.
  - Singh, S., D'Sa, E. J., and Swenson, E. M.: Chromophoric dissolved organic matter (CDOM) variability in Barataria Basin using excitation-emission matrix (EEM) fluorescence and parallel factor analysis (PARAFAC), Science of the <a href="tetal-Total">tetal-Total</a> environment, 408, 3211-3222, 2010.
- 25 Stramski, D., Reynolds, R.A., Kahru, M. and Mitchell, B.G.: Estimation of particulate organic carbon in the ocean from satellite remote sensing, Science, 285(5425), 239-242, 1999.
  - Uitz, J., Claustre, H., Gentili, B., and Stramski, D.: Phytoplankton class-specific primary production in the world's oceans: seasonal and interannual variability from satellite observations, Global Biogeochemical Cycles, 24, 2010.

- Wang, H., Huang, W., Harwell, M. A., Edmiston, L., Johnson, E., Hsieh, P., Milla, K., Christensen, J., Stewart, J., and Liu, X.: Modeling oyster growth rate by coupling oyster population and hydrodynamic models for Apalachicola Bay, Florida, USA, Ecological Modelling, 211, 77-89, 2008.
- Werdell, P. J., Bailey, S., Fargion, G., Pietras, C., Knobelspiesse, K., Feldman, G., and McClain, C.: Unique data repository facilitates ocean color satellite validation, Eos, Transactions American Geophysical Union, 84, 377-387, 2003.

- Werdell, P. J., and Bailey, S. W.: An improved in-situ bio-optical data set for ocean color algorithm development and satellite data product validation, Remote sensing of environment environment, 98, 122-140, 2005.
- Werdell, P. J., Franz, B. A., and Bailey, S. W.: Evaluation of shortwave infrared atmospheric correction for ocean color remote sensing of Chesapeake Bay, Remote Sensing of Environment, 114, 2238-2247, 2010.
  - Zhang, X., Twardowski, M., and Lewis, M.: Retrieving composition and sizes of oceanic particle subpopulations from the volume scattering function, Applied Optics, 50, 1240-1259, 10.1364/AO.50.001240, 2011.
  - Zhang, X., and Gray, D. J.: Backscattering by very small particles in coastal waters, Journal of Geophysical Research: Oceans, 120, 6914-6926, 10.1002/2015JC010936, 2015.
  - Zhao, J., Temimi, M., Ghedira, H., and Hu, C.: Exploring the potential of optical remote sensing for oil spill detection in shallow coastal waters-a case study in the Arabian Gulf, Opt—ics\_Express, 22, 13755-13772, 10.1364/OE.22.013755, 2014.
- Zheng, G., Stramski, D., and Reynolds, R. A.: Evaluation of the Quasi-Analytical Algorithm for estimating the inherent optical properties of seawater from ocean color: Comparison of Arctic and lower-latitude waters, Remote Sensing of Environment, 155, 194-209, 2014.
  - Zhu, W., Yu, Q., Tian, Y. Q., Chen, R. F., and Gardner, G. B.: Estimation of chromophoric dissolved organic matter in the Mississippi and Atchafalaya river River plume regions using above-surface hyperspectral remote sensing, Journal of Geophysical Research: Oceans, 116, 2011.
- 25 Zielinski, O., Busch, J. A., Cembella, A. D., Daly, K. L., Engelbrektsson, J., Hannides, A. K., and Schmidt, H.: Detecting marine hazardous substances and organisms: sensors for pollutants, toxins, and pathogens, Marine Science Faculty Publications, 159, 2009.

Table 1: In\_situ estuarine & near-shore dataset (IES: IOPs and Rrs matchups), compiled from the SeaBASS, with locations, possessing status, project instructors, and the purpose in this analysis. Apalachicola Bay, Barataria Bay, and Galveston Bay datasets were collected by the authors during various field surveys.

Experiment	Location	N	Processing	Investigator(s)	Purpose for
	(Depth <10 m)		status		QAA-V
SWFL	South-west Florida	5	Final	Chuanmin Hu	Validation
EcoHAB	South-west Florida	74	Final	Kendall Carder	Tuning
Chesapeake Bay –	Chesapeake Bay	8	Preliminary	Richard Zimmermann &	Validation
Light Tower				Glenn Cota	
GEO-CAPE	Chesapeake Bay	19	Final	Richard Miller	Validation
Tampa Bay	Tampa Bay	47	Final	Chuanmin Hu	Tuning
Lake Erie	Lake Erie	3	Preliminary	Rick Gould	Validation
Horn Island	Horn Island	6	Preliminary	Bob Arnone	Validation
CoJet-4,5,6	Mobile Bay	18	Preliminary	Don Johnson	Validation
Cojet-7	Mississippi Sound	6	Preliminary	Rick Gould	Validation
BluCAR	Apalachicola Bay	32	Final	Eurico D'Sa &	Validation
				Christopher Osburn	
BluCAR	Barataria Bay	31	Final	Eurico D'Sa &	Validation
				Christopher Osburn	
Bio-optics	Chesapeake Bay	43	Final	Alex Gilerson	Validation
SFP	Florida Bay	8	Final	Frank Muller-Karger	Validation
Hurricane Harvey	Galveston Bay	27	Final	Eurico D'Sa & Ishan Joshi	Validation
GEOCAPE	Northern Gulf of	13	Final	Antonio Mannino &	Validation

GOMEX Mexico shelf	Michael Novak
--------------------	---------------

Table 2: Processing steps of QAA-V for obtaining total absorption  $(a_t)$  and backscattering coefficients  $(b_{b_t})$ . Levels 0 and 1C were adopted from Lee et al. (2002), whereas 1A and 1B were modified in this study<sup>1</sup>. Level 1C1 is adopted from D'Sa et al. (2007).

Level	Parameter	Model	Type
0	$R_{rs}^{0-}(\lambda)$	$R_{rs}^{\ 0-}(\lambda) = \frac{R_{rs}^{\ 0+}(\lambda)}{0.52 + 0.17 \times R_{rs}^{\ 0+}(\lambda)}$	Semi- analytical
1A	u(λ)	$\begin{split} u(\lambda) &= \frac{-g_0 + [g_0^2 + 4 \times g_1 \times R_{r_0}^{-1} \circ (1)]^{0.5}}{2 \times g_1} \\ \rho &= \log_{10} \left( \frac{R_{r_0}^{-1} \circ (0)}{R_{r_0}^{-1} \circ (671)} \right) \\ g_0 &= 0.0788 \text{ and } g_1 = 0.2379 \text{ for } \rho < 0.25 \\ g_0 &= 0.0895 \text{ and } g_1 = 0.1247 \text{ for } \rho \geq 0.25 \end{split}$	Semi- analytical
1B	$\lambda_0 = 551 \text{ or } 555$ $\lambda_1 = 671$	$\begin{split} a_{tnw}(\lambda_0) &= \begin{cases} 10^{(0.139-1.788\times\rho+0.490\times\rho^2)} & \text{if } \rho < 0.25 \\ 10^{(0.406-2.940\times\rho+0.928\times\rho^2)} & \text{if } \rho \geq 0.25 \end{cases} \\ \rho &= \log_{10}\left(\frac{R_{rs}^{0^-}(\lambda_0)}{R_{rs}^{0^-}(\lambda_1671)}\right) \end{split}$	Empirical
1C 0	$b_{b_{\mathrm{tnw}}}(\lambda_0)$	$b_{b_{tnw}}(\lambda_0) = \frac{(a_{tnw}(\lambda_0) + a_w(\lambda_0)) \times u(\lambda_0)}{1 - u(\lambda_0)} - b_{b_w}(\lambda_0)$	Analytical
1	η	$\eta = -0.566 - 1.395 \times \log_{10}(b_{btnw}555)$	Empirical
2	$b_{b_t}(\lambda)$	$b_{b_t}(\lambda) = b_{b_w}(\lambda) + b_{b_{tnw}}(\lambda_0) \times \left(\frac{\lambda_0}{\lambda}\right)^{\eta}$	Semi- analytical
3	a <sub>t</sub> (λ)	$a_t(\lambda) = b_{b_t}(\lambda) \times \left(\frac{1 - u(\lambda)}{u(\lambda)}\right)$	Analytical

SPM models					
This study	$SPM = (103.07 \times b_{b_{tnw}} 532) + 0.24$	Empirical			
D'Sa et al. (2007)	$SPM = (106.93 \times b_{b_{tnw}} 555) + 0.61$	Empirical			
Nechad et al. (2010)	$SPM = \left(\frac{A^{\rho} \times \rho_{w}}{1 - {}^{\rho}w/_{C^{\rho}}}\right) + B^{\rho};$	Empirical			
	where $A^{\rho}$ =373.79 mg $L^{-1}$ , $B^{\rho}$ =1.47 mg $L^{-1}$ , $C^{\rho}$ = 0.1747 for $\lambda$ =670 nm				

Parameters  $g_0 = 0.0788$  and  $g_1 = 0.2379$  were derived with HL datasets.  $\lambda_0 = 551$  or 555nm;  $R_{rs}^{0-}$  = remote-sensing reflectance just below water surface;  $a_{tnw} =$  total non-water absorption coefficient;  $b_{b_{tnw}} =$  total non-water backscattering coefficient;  $a_{tnw} =$  total non-water backscattering coeffici

<u>Table 3: The calibration coefficients for sensor-specific QAA tuning.</u>  $\lambda_0$  is a sensor-specific reference wavelength.

Sensor	$\rho = log_{10} \left( \frac{{R_{rs}}^{0-}(\lambda_0)}{{R_{rs}}^{0-}(\lambda_1)} \right)$	$a_{tnw}(\lambda_0) = 10^{(a+b\times\rho+c\times\rho^2)}$ (Level 1B — Table 2)						
		$\rho < 0.25$ $\rho \ge 0.25 \text{ and } \rho \le 0.6$			o ≤ 0.65			
		<u>a</u>	<u>b</u>	<u>c</u>	<u>a</u>	<u>b</u>	<u>c</u>	
VIIRS	$\lambda_0 = 551 \text{ nm } \& \lambda_1 = 671 \text{ nm}$	0.139	-1.788	0.490	0.406	-2.940	0.928	
MODIS-Aqua	$\lambda_0 = 555 \text{ nm } \& \lambda_1 = 667 \text{ nm}$	0.091	-1.800	0.560	0.275	-2.674	0.813	
Sentinel3 OLCI	$\lambda_0 = 560 \text{ nm } \& \lambda_1 = 674 \text{ nm}$	0.176	-1.830	0.528	0.397	2.940	0.800	
MERIS	$\lambda_0 = 560 \text{ nm } \& \lambda_1 = 665 \text{ nm}$	0.081	-1.868	0.688	0.314	-2.733	0.713	
<u>SeaWiFS</u>	$\lambda_0 = 555 \text{ nm } \& \lambda_1 = 670 \text{ nm}$	0.128	-1.792	0.505	0.276	-2.742	0.842	
Sentinel2 MSI	$\lambda_0 = \underline{560 \text{ nm (Band 3)}}$	0.0814	-1.868	0.688	0.223	-2.732	0.740	
	<u>&amp;</u>							
	$\lambda_1 = 665 \text{ nm (Band 4)}$							
Landsat8 OLI	$\lambda_0 = \underline{560 \text{ nm (Band 3)}}$	<u>-0.087</u>	<u>-1.900</u>	0.952	0.057	<u>-2.667</u>	0.753	
	<u>&amp;</u>							
	$\Delta_1 = 655 \text{ nm (Band 4)}$							

Table 4: The performance evaluation of the atmospheric correction procedure (MUMM) in Galveston Bay (USA) during two field campaigns (September 29, 2017 & October 29–30, 2017).

Image date	Difference of	Number	Absolute Mean relative error (MRE) (%)					
	days for field	of stations	410	443	486	551	671	All
	observation		nm	nm	Nm	nm	nm	bands
September 30, 2017	+1	9	114.7	40.5	19.8	10.9	18.1	40.8
October 29, 2017	0	10	55.8	12.4	5.1	6.3	8.9	17.7
October 30, 2017	0	7	139.6	42.1	21.5	7.5	7.6	43.7

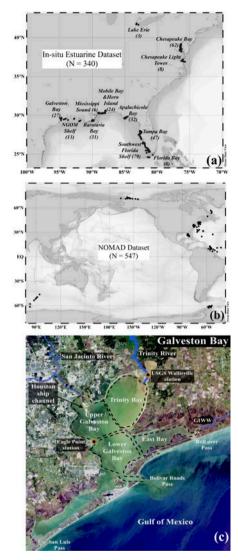


Figure 1: a) In-situ dataset (IES) representing estuarine and near-shore waters (< 10 m) in the U.S. East Coast and northern Gulf of Mexico (N=340), b) NOMAD dataset (N=547), and c) Galveston Bay, Texas (USA). GIWW=Gulf Inter-Coastal Water Way.

Formatted: Font: Not Italic

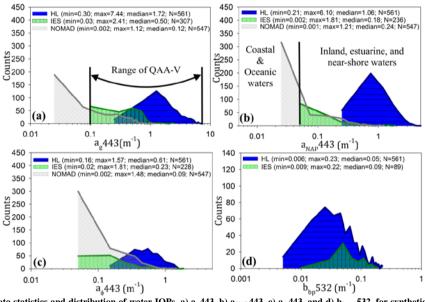


Figure 2: Data statistics and distribution of water IOPs, a)  $a_g443$ , b)  $a_{NAP}443$ , c)  $a_{\varphi}443$ , and d)  $b_{btm}$ 532, for synthetic data (HL-Hydrolight®; blue color), in\_situ estuarine & near-shore data (IES; green color), and NOMAD data set (NOMAD; grey color). Range of QAA-V indicates data that are used to update QAA-V for optically shallow waters (e.g., HL and IES).

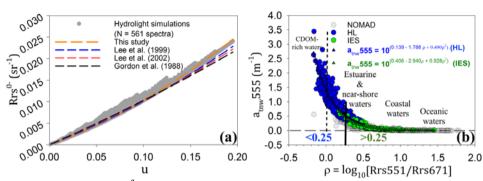


Figure 3. a)  $u = b_b/(a+b_b)$  vs.  $R_{rs}^{0.}$  for various studies (this study-orange, Lee et al. (1999)-blue, Lee et al. (2002)-red, and Gordon et al. (1988)-black) using HL datasets, b) a relationship between green to red band ratio and  $a_{tnw}$ 555 for different dataset (HL-blue, IES-green, and NOMAD-grey). Black line shows a threshold to facilitate a smooth transition from in\_situ to synthetic data in modeling of  $a_{tnw}$ 555. A dashed line is separating data with negative  $\rho$ .

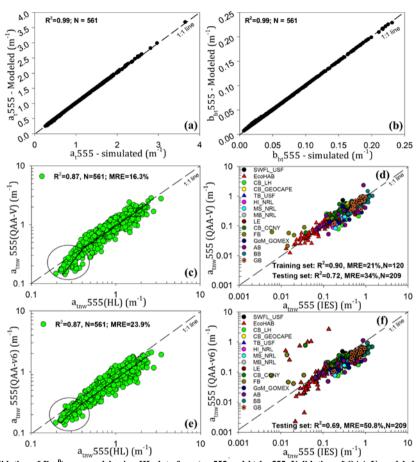


Figure 4. Validation of Rrs<sup>0</sup> vs. u model using HL data for, a) a<sub>1</sub>555 and b) b<sub>b1</sub>555. Validation of QAA-V modeled a<sub>tmv</sub>555 with "true" a<sub>tmv</sub>555 for c) HL synthetic dataset (bias<sub>log10</sub>=-0.0208, RMSE<sub>log10</sub>=0.0963 m<sup>-1</sup>) and d) IES dataset (bias<sub>log10</sub>=-0.0294, RMSE<sub>log10</sub>=0.190 m<sup>-1</sup>). Validation of QAA-v6 modeled a<sub>tmv</sub>555 with "true" a<sub>tmv</sub>555 for e) HL synthetic dataset (bias<sub>log10</sub>=-0.1180, RMSE<sub>log10</sub>=0.1490 m<sup>-1</sup>) and f) IES dataset (bias<sub>log10</sub>=-0.1252, RMSE<sub>log10</sub>=0.278 m<sup>-1</sup>). [Note: Training set includes EcoHAB and Tampa Bay data (Table 1). IOP measurements of Galveston Bay (this study) are shown with orange hexagons. MRE= absolute mean relative error (%). TB=Tampa Bay, AB=Apalachicola Bay, BB=Barataria Bay, CB=Chesapeake Bay, FB=Florida Bay, GoM=Gulf of Mexico, HI=Horn Island, LE=Lake Erie, MS=Mississippi Sound, MB=Mobile Bay, SWFL=Southwest Florida, GB=Galveston Bay (Table 1).]

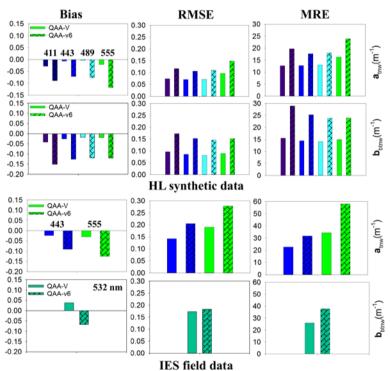
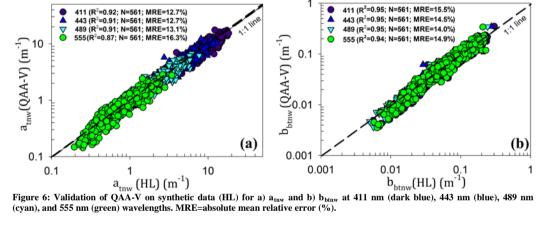


Figure 5: Statistical assessment of QAA-V in comparison to QAA-v6 (updated on May 2015) using synthetic data (HL) (top two panel) and estuarine & near-shore field data (IES) (bottom two panels). Color scheme indicates a<sub>tuw</sub> and b<sub>btuw</sub> at 411 nm (dark blue), 443 nm (blue), 489 nm (cyan), 555 nm (green), and 532nm (dark green) wavelengths. MRE=absolute mean relative error (%). RMSE and bias are in m<sup>-1</sup>.





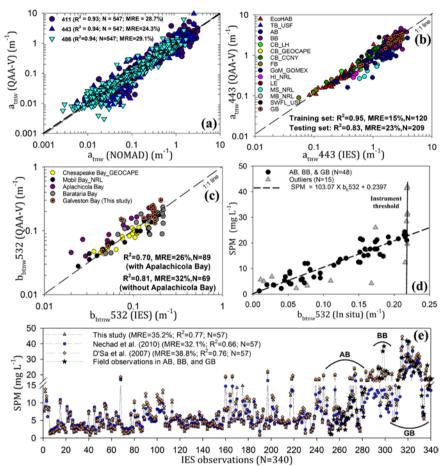


Figure 7: Evaluation of QAA-V's performance on estuarine & near-shore dataset (IES): a)  $a_{tnw}$ 443 and b)  $b_{btnw}$ 532, and on NOMAD datasets: c)  $a_{tnw}$  at 411 nm (dark blue), 443 nm (blue), and 488 nm (cyan) wavelengths. d) SPM- $b_{btnw}$ 532 relationship ( $R^2$  = 0.89 without outliers) that was formulated based on field observations in Apalachicola Bay, Barataria Bay, and Galveston Bay. e) A comparison of SPM- $b_{btnw}$ 532 relationship of this study (grey triangles) with SPM models from Nechad et al. (2010) (blue circles) and D'Sa et al. (2007) (orange squares), and with field observations in AB, BB and GB (black stars). TB=Tampa Bay, AB=Apalachicola Bay, BB=Barataria Bay, CB=Chesapeake Bay, FB=Florida Bay, GOM=Gulf of Mexico, HI=Horn Island, LE = Lake Erie, MS=Mississippi Sound, MB=Mobile Bay, SWFL=Southwest Florida, GB=Galveston Bay (Table 1). Training set includes EcoHAB and Tampa Bay datasets. MRE=absolute mean relative error (%).

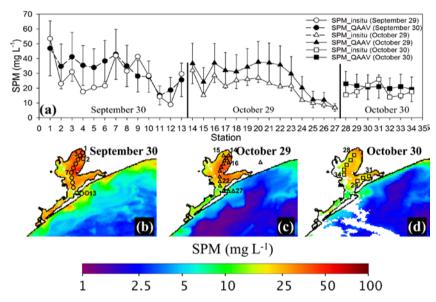


Figure 8: a) Validation of QAA-V derived SPM vs. in\_situ SPM for b) September 30, 2017 (MRE=39.9 %, N=13), c) October 29, 2017 (MRE=39.1%, N=14), and d) October 30, 2017 (MRE=26.6 %, N=7). Stations for validation analysis (Fig. 8a) are also illustrated in corresponding SPM maps.

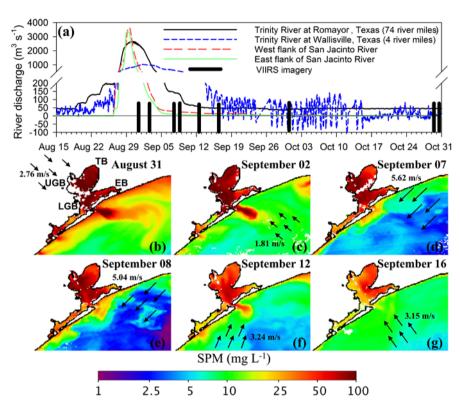


Figure 9: a) River discharge of the Trinity River at Romayor, Texas (black line) and at Walllisville, Texas (blue line), and the west flank of the San Jacinto River (red line) and the east flank of the San Jacinto River (green line). The river discharge at Wallisville site was not corrected for the tides. Black bars represent the days of VIIRS satellite imagery for SPM analysis in Galveston Bay. bg) Post-hurricane SPM maps of Galveston Bay. TB=Trinity Bay, UGB=Upper Galveston Bay, LGB=Lower Galveston Bay, and EB=East Bay (Fig. 1c).



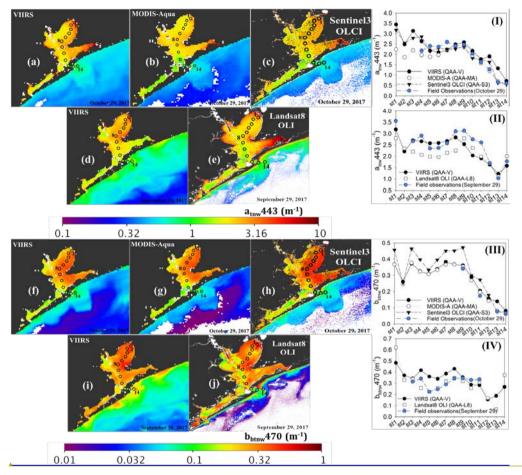


Figure 10: Application of sensor-specific QAA-V tuning to obtain the maps of  $a_{tinw}$ 443 using a) VIIRS, b) MODIS-Aqua and c) Sentinel3 OLCI on October 29, 2017, and d) VIIRS and e) Landsat8 OLI on September 30, 2017 and September 29, 2017, respectively. The validation of these maps with the field observations along the transect (St. 1 to St. 14) is shown in (I) for figs. 8a-8c and in (II) for figs. 8d & 8e. The maps of  $b_{btuw}$ 470 were obtained similarly for f) VIIRS (October 29, 2017), g) MODIS-Aqua, h) Sentinel3 MSI, i) VIIRS (September 30, 2017), and j) Landsat8 OLI (September 29, 2017) with their validation results in (III) and (IV), respectively. Parameter values beyond the upper limit of tuned QAA ( $\rho$  > 0.65) are shown masked in white.