

Stability of alkalinity in Ocean Alkalinity Enhancement (OAE) approaches - consequences for durability of CO₂ storage

5 Jens Hartmann^{1)*}, Niels Suitner^{1)*}, Carl Lim²⁾, Julieta Schneider³⁾, Laura Marín-Samper⁴⁾, Javier Arístegui⁴⁾, Phil Renforth⁵⁾, Jan Taucher³⁾, Ulf Riebesell³⁾

1) Institute for Geology, Universität Hamburg, Bundesstrasse 55, D-20146 Hamburg, Germany

2) Faculty of Physics/Electrical Engineering, Universität Bremen, Otto-Hahn-Allee 1, 28359 Bremen, Germany

3) Geomar Helmholtz Centre for Ocean Research Kiel, Kiel, Germany

10 4) Instituto de Oceanografía y Cambio Global, Universidad de Las Palmas de Gran Canaria, Las Palmas, Spain

5) School of Engineering and Physical Sciences, Heriot-Watt University, Edinburgh, EH14 4AS, UK

*) These authors contributed equally

Correspondence to: Jens Hartmann (geo@hannes.de), Niels Suitner (niels.suitner@uni-hamburg.de)

15 **Abstract.** According to modelling studies, ocean alkalinity enhancement (OAE) is one of the proposed carbon dioxide removal (CDR) approaches with large potential, and the beneficial side effect of counteracting ocean acidification. The real-world application of OAE, however, remains unclear as most basic assumptions are untested. Before large-scale deployment can be considered, safe and sustainable procedures for the addition of alkalinity to seawater must be identified and governance established. One of the concerns is the stability of alkalinity when added to seawater. The surface ocean is already 20 supersaturated with respect to calcite and aragonite, and an increase in total alkalinity together with a corresponding shift in carbonate chemistry towards higher carbonate ion concentrations would result in further increase in supersaturation, and potentially to solid carbonate precipitation. Precipitation of carbonate minerals consumes alkalinity and increases dissolved CO₂ in seawater, thereby reducing the efficiency of OAE for CO₂ removal. In order to address the application of alkaline solution as well as fine particulate alkaline solids, a set of six experiments was performed using natural seawater with alkalinity 25 of around 2,400 µmol/kgw. The application of CO₂-equilibrated alkaline solution bears the lowest risk of losing alkalinity due to carbonate phase formation if added total alkalinity (Δ TA) is less than 2,400 µmol/kgw. The addition of reactive alkaline solids can cause a net loss of alkalinity if Δ TA > 600 µmol/kgw (e.g., for Mg(OH)₂). Commercially available (ultrafine) Ca(OH)₂ causes, in general, a net loss in TA for the tested amounts of TA addition, which has consequences for suggested use 30 of slurries with alkaline solids supplied from ships. The rapid application of excessive amounts of Ca(OH)₂, exceeding a threshold for alkalinity loss, resulted in a massive increase in TA (> 20,000 µmol/kgw) at the cost of lower efficiency and resultant high pH values > 9.5. Analysis of precipitates indicates formation of Ca-dominated mineral phases. However, unstable carbonate phases formed can partially redissolve, indicating that net-loss of a fraction of alkalinity may not be permanent, which has important implications for real world OAE application.

Our results indicate that using an alkaline solution instead of reactive alkaline particles can avoid carbonate formation, unless
35 alkalinity addition via solutions shifts the system beyond critical supersaturation levels. To avoid the loss of alkalinity and dissolved inorganic carbon (DIC) from seawater, the application of reactor techniques can be considered. These techniques produce an equilibrated solution from alkaline solids and CO₂ prior to application. Differing behaviours of tested materials suggest that standardized engineered materials for OAE need to be developed to achieve safe and sustainable OAE with solids, if reactors technologies should be avoided.

40 1 Introduction

The impacts of climate warming are increasingly severe (IPCC, 2021). To tackle this problem, the 2°C target was stipulated in the 2015 Paris Agreement (UNFCCC, 2015). While many countries claim to have shown efforts to decrease greenhouse gas emissions since, the overall emissions are still rising (Friedlingstein et al., 2021) and it seems now improbable to reach the target by mitigation alone, without the help of negative emission technologies (NETs) (IPCC, 2021). However, most discussed
45 NETs or carbon dioxide removal (CDR) technologies are still immature for upscaling or even ready for operation.

Ocean Alkalinity Enhancement (OAE) is one of the CDR strategies being considered (NASEM, 2022). However, its potential impacts are not well understood as well as practicalities of operating at scale, like suitable approaches to monitoring and verification. This is due to the lack of laboratory and field experiments targeting OAE, while laboratory experiments, focusing on seawater carbonate chemistry in general, exist in large quantity, with limited implication for OAE application.
50 Consequences of application and techniques for optimal deployment need therefore to be determined to develop sustainable ways of OAE. A number of model studies exist (Fakhraee et al., 2022; González and Ilyina, 2016; Ilyina et al., 2013; Kheshgi, 1995; Lenton et al., 2018) focusing on the consequences of OAE at the global scale or the applicability via (cargo) ships (Caserini et al., 2021). They are, however, based on a series of assumptions, e.g., that added alkalinity remains stable, is not lost, or negative net change in TA due application of OAE is not a consequence, and that alkalinity can be technically added
55 to seawater.

One of the key questions to be solved for OAE is the stability of the added alkalinity (Moras et al., 2021). Additional alkalinity loss via carbonate phase formation (causing CO₂ leakage), either via inorganic processes or triggered by biological activity, should be avoided. The carbonate supersaturation level is a driver for possible formation of new carbonate phases (Koishi, 2017). Nucleation of new phases is the greatest energy barrier to encompass before crystal growth can continue (Sun et al.,
60 2015). After nucleation from a bulk solution and for the growth to proceed, a further energy barrier at the interface between the new phase and the surrounding solution matrix must be overcome (Koishi, 2017; Sear, 2007).

Carbonate nucleation in seawater, filtered with 0.2 µm filters to remove particles, with a salinity around 35 at 25°C, starts at a saturation level of Ω_{calcite} around 19-20 (Morse and He, 1993), which corresponds to an $\Omega_{\text{aragonite}}$ of around 12.5-13.5, depending on temperature and salinity. The filtering of water is for avoiding nuclei for condensation or providing surfaces for carbonate
65 formation (Wurgaft et al., 2021). The energy barrier for carbonate formation on suitable surfaces, like on existing carbonate is

however lower. One of the until now unclear aspects in context of OAE is at which saturation levels carbonate formation in seawater occurs after application of alkalinity and at which time after application this is triggered. In addition, the abundance of possible seed particles and their surface area provided (quality and quantity) for possible carbonate formation triggering an alkalinity loss needs to be understood for OAE management.

70 Addition of alkalinity without equilibrating the water with the atmospheric CO₂ causes high saturation levels (due to more pronounced shifts in the carbonate system). Even under optimal natural conditions for air-sea gas exchange, CO₂ equilibration could take weeks to months (Jones et al., 2014). Such a non-equilibrated system would be representative for any OAE application where CO₂ uptake is not actively facilitated, or where ocean mixing of waters and ingasing is slow. Alternatively, OAE procedures could be conducted in a way that saturation levels after alkalinity application remain low, for example by 75 equilibrating the ocean water with CO₂ artificially or using substances which allow for lower saturation levels.

Part of the applied alkalinity due OAE procedures maybe lost due carbonate formation, meaning that OAE efficiency should be rated based on the net alkalinity added:

$$\Delta TA_{net} = TA_{final} - TA_{initial} = \Delta TA_{added} + \Delta TA_{loss}$$

ΔTA_{net} : net change of TA

TA_{final} : absolute reached TA after TA addition (measured)

$TA_{initial}$: initial TA of used seawater (measured)

ΔTA_{added} : amount of increased TA by alkalinity addition

ΔTA_{loss} : amount of TA decline during the experiment (negative sign)

In order to test for the stability of alkalinity after simulated OAE application, this study aims to address the following five questions using insights from six conducted experiments:

80

- 1) What is the efficiency advantage using preproduced, CO₂-equilibrated alkaline solutions over non-equilibrated alkaline solutions?
- 2) Do naturally occurring particles or added particles in the ocean water affect the stability range of added alkalinity?
- 3) Are fast reacting solid alkaline materials like Ca(OH)₂ or even slower ones like Mg(OH)₂ useful for adding alkalinity 85 to the seawater?
- 4) Does lost alkalinity due to carbonate formation recover due to redissolution to some part?
- 5) At which elevated bulk solution saturation levels can potential loss of alkalinity be expected after how much time?

2 Methods

In order to understand the consequences of different application procedures, materials and boundary conditions for sustainable 90 application of OAE, a set of six experiments was designed (Table 1) using these basic system setups:

- I A CO₂-equilibrated system, using an aqueous solution for OAE, testing 4 days.
- II A non-CO₂-equilibrated system using an aqueous solution for OAE, testing 4 days.
- III A CO₂-equilibrated system with/without added carbonate particles and, using aqueous solution for OAE, testing a period of ~90 days.
- IV A non CO₂-equilibrated system, using solid particles of magnesium hydroxide (Mg(OH)₂) for OAE, testing 4 days.
- V A non CO₂-equilibrated system, using solid alkalinity of Ca(OH)₂ for OAE and forcing TA loss to study TA recovery potential, testing 10 days.
- VI Adding excessive amounts of alkaline particles to test if TA-loss can be avoided, testing 24 hours.

#	abiotic biotic	material	CO ₂	water	setup			ΔTA _{added} [μmol/kgw]	concept [related research questions]
					filter	reactor	storage		
I	a	Na ₂ CO ₃ / NaHCO ₃	eq.	GC	0.2 μm	0.5 L bottle	dark	0-2,400	CO ₂ -equilibrated, ΔTA _{added} steps of 300 μmol/kgw, TA-addition with stock solution, runtime 4 days [1]
	b				55 μm	1.2 L bottle	climate chamber	0-1,200	
II	a	NaOH	neq.	GC	0.2 μm	0.5 L bottle	dark	0-2,400	Non-CO ₂ -equilibrated, ΔTA _{added} steps of 300 μmol/kgw, TA-addition with stock solution, runtime 4 days [1, 2, 5]
	b				55 μm	1.2 L bottle	climate chamber	0-1,200	
III	b	Carbonate precipitate	eq.	GC	-	8 L bottle	harbour	0/2,100/ 2,400	CO ₂ -equilibrated, TA-addition with stock solution, trigger precipitation with seed material, 90 days [2, 5]
IV	a	Mg(OH) ₂	neq.	GC	0.2 μm	1.2 L bottle	climate chamber	0-2,400	Non-CO ₂ -equilibrated, ΔTA _{added} steps of 600 μmol/kgw, TA-addition with solid alkaline material, runtime 4 days [2, 3, 5]
	b				55 μm			+34,288	
V	a	Ca(OH) ₂	neq.	N.-Sea	0.2 μm	0.5 L flask	shaking table	5,400	pH/TA development over 10 days, redissolution, solid alkaline material [3, 4]
VI	a	Mg(OH) ₂ / Ca(OH) ₂	neq.	N.-Sea	0.2 μm	0.5 L flask	shaking table	-	TA loss/gain of various weights of added solid alkaline materials, runtime 1 day [3]

Table 1: Overview of the 6 experiments conducted (I-VI). Abbreviations: abiotic (a), seawater filtered with 0.2 μm filters to remove plankton, and biotic (b), seawater filtered with 55 μm filters to remove larger plankton. The column CO₂ refers to equilibrated to atmospheric CO₂ levels (eq.) or not (neq.), water: origin of used seawater (GC – Gran Canaria/Taliarte and North Sea, see below for details). ΔTA_{added} is the range of added alkalinity per experiment. Numbers of the related research questions (see Introduction) are given in the concept column in brackets.

To examine how planktonic organisms and particles naturally occurring in the ocean might affect OAE performance, e.g., by serving as condensation nuclei for mineral precipitation, we performed two separate sets of experiments including and 110 excluding biogenic particles (termed biotic and abiotic hereafter). For the abiotic approach seawater was filtered through a 0.2 μm PC-filter. Seawater for the 'biotic' approach was filtered through a 55 μm filter to exclude larger and rare organisms (e.g., mesozooplankton), but keep the remainder.

For all experiments **I** to **IV**, oligotrophic coastal seawater ($\text{TA}_{\text{initial}} \approx 2,411 \mu\text{mol/kgw}$, $\text{S} \approx 36.6$, $\text{pH} \approx 8.07$, $\text{T} \approx 23^\circ\text{C}$) was taken at 4 meters depth in the vicinity of the harbour of Taliarte, Gran Canaria, on 2021-09-16 (**I+II+IV**) and 2021-09-30 (**III**). 115 Seawater for the alkalinity recovery test, experiment **V**, was taken from the open North Sea (German Bight, N 54.93 E 6.43, $\text{TA}_{\text{initial}} \approx 2297 \mu\text{mol/kgw}$, $\text{S} \approx 32.9$, $\text{pH} \approx 8.05$, $\text{DSi} 16 \mu\text{mol/L}$). CO2SYS (Pierrot et al., 2006) was used to determine the amount of alkaline solution/solid material needed to increase TA in several steps.

2.1 Experiment I and II: Comparing CO₂ equilibrated versus non-equilibrated alkalinity enhancement

For the abiotic **equilibrated system (Ia)** nine batch solutions were prepared adding TA in nine steps of 300 $\mu\text{mol/kgw}$, starting 120 at an initial alkalinity value of $\sim 2,400 \mu\text{mol/kgw}$ (fresh untreated seawater, ΔTA_0), with a maximum final treatment of $\text{TA}_{\text{final}} \sim 4,800 \mu\text{mol/kgw}$ (ΔTA_{2400}). The TA-enhancement was achieved by adding calculated volumes of 0.5 M NaHCO₃ and 0.5 M Na₂CO₃ solutions using calculations from CO2SYS to ensure CO₂-equilibrated conditions (420 ppm - see attached data table 125 for added volumes). While preparing stock solutions with NaHCO₃/Na₂CO₃, solids dissolved entirely within seconds to several minutes. After taking an initial sample (day 0) from every batch, the remaining solutions were filled in portions of 400.0 g \pm 0.5 g into 500 ml Dickson bottles (bottles for seawater TA and DIC standards), each for a duration of 24 h or 96 h. All bottles were stored in the dark, unsealed - open to the laboratory atmosphere and kept at a constant temperature of 24 $^\circ\text{C}$.

The exact same procedure was followed for the abiotic **non-equilibrated system (IIa)**, except using a 0.5 M NaOH solution for the alkalinity enhancement and preventing gas exchange by filling the bottle to the top ($\approx 525 \text{ g}$) and capping them airtight without headspace.

130 For the biotic **equilibrated system (Ib)** and **non-equilibrated system (IIb)** 1.2-L polycarbonate bottles were used, both filled to the top and capped airtight. Bottles were stored in a climate chamber (24 $^\circ\text{C}$ and 12/12 hours light/dark intervals) over the duration of the experiment to ensure a stable environment for the microbial community. The same seawater, resources and procedures for alkalinity enhancement were utilized as in the abiotic experiments **Ia** and **IIa**. Samples were taken just at the start (day 0) and the end of the experiment (day 4) to avoid headspace in the bottles. Starting with the initial value of seawater 135 ($\text{TA}_{\text{initial}}/\Delta\text{TA}_0$) the alkalinity was increased in eight 150 $\mu\text{mol/kgw}$ steps to 3,600 $\mu\text{mol/kgw}$ (ΔTA_{1200}).

2.2 Experiments III: Testing the role of particles as condensation nuclei for mineral precipitation

We prepared a solution in equilibrium with the atmosphere as described for experiment **I** for the two highest ΔTA treatments, namely ΔTA_{2100} , ΔTA_{2400} . Solutions were placed into 8L PET bottles in two treatments: one without adding particles and one with adding previously precipitated carbonates (120 mg wet weight each) as seed material (precipitation nuclei), retrieved

140 from a preceding experiment. The closed bottles were placed next to the pier in the harbour of Taliarte, Gran Canaria, about 1.5 m below the water surface with average water temperatures around 20-23°C. Samples of 150 ml each were taken at days 0, 2, 4, 6, 8 and 10. After the 10 days of experiment the content of the bottles was transferred to 500 ml Dickson bottles and left alone closed to the atmosphere and in the dark for another 80 days. Two additional samples (40 ml each) were collected at days 46 and 90.

145 **2.3 Experiments IV, V and VI: Testing alkalinisation with solid Mg(OH)₂ and Ca(OH)₂.**

2.3.1 Experiment IV: Mg(OH)₂

While for experiments **I** and **II** fast dissolving materials with relatively high solubilities were used to produce an alkaline solution, solid materials were used in experiments **IV, V & VI**. Magnesium hydroxide in experiment **IV** was added as a powder directly into the reactor bottles. Because of a lower reactivity the material was not to be expected to dissolve immediately, so 150 dissolution took place throughout the experimental duration of four days. Two different Mg(OH)₂ materials from the companies (Negative Emissions Materials (brucite I) and Carl Roth (brucite II)) were utilized to compare their behaviour in dissolution and generation of alkalinity. Brucite I is a substance derived from the dissolution of olivine rich material, brucite II an industrial product prepared for rapid dissolution. Both, abiotic and biotic approaches (distinction 0.2 µm filtration) were conducted in 1.2-L PC bottles and followed the same procedure as in **Ib** and **IIb**, filled airtight to the top and kept in the climate 155 chamber, after mixing them gently for 5 minutes. The mass of added magnesium hydroxide was calculated to yield the same increase in alkalinity as in experiments **I** and **II**, assuming total dissolution could be achieved. The target concentrations ranged from 12.8 mg/kgw to 666 mg/kgw and representing solid alkalinity addition of 600, 1200, 1800, 2100, 2400 and 34288 µmol/kgw in $\Delta\text{TA}_{\text{added}}$. The latter high addition was intended to simulate an approach assuming large amounts of particles being added, e.g., via ship disposal. The mixing at the beginning should simulate turbulence during application, 160 assuming further low to no turbulence. Given the further still water a scenario is simulated, which lowers the particle boundary layer dynamics. This can be seen as a baseline scenario, where more turbulence might cause higher dissolution rates. In experiment **IV** liquid subsamples were taken at the start of the experiment and after 24 and 96 hours. The brucite material was dried at 40°C for 72 hours before the experiments.

2.3.2 Experiment V: Alkalinity recovery after mineral precipitation

165 This experiment focused on the addition of alkalinity due to redissolution of instable alkaline phases formed after Ca(OH)₂ application causing an initial net loss of TA. 0.2 g Ca(OH)₂ ($\Delta\text{TA}_{\text{added}} \approx 5400 \mu\text{mol/kgw}$) were dissolved in 500 ml PC-Erlenmeyer-flasks filled with 300 g of North Sea water (0.2 µm filtered) and left open to the laboratory atmosphere at 23 °C. The experiment was conducted in 12 timesteps lasting from 15 min to 10 days, for each timestep with three replicates and one control flask each without any added material. All experimental flasks were permanently placed on a shaking table (120 rpm,

170 the maximum frequency without risking loss of water and to simulate favourable conditions for gas exchange). The pH of the seawater was continuously monitored in 5 minutes steps. About 100 ml per sample were used for the measurements.

2.3.3. Experiment VI: Thresholds – the swing from TA loss to TA gain again

The experiment was set up to check if potential threshold values for net TA loss/gain with the combined effects of alkaline material addition plus mineral precipitation after 24 hours exist in case larger amounts of solids are dissolved than in the 175 previous experiments, resulting in the net loss of TA. A gradient of added solid masses to seawater, using the brucite II (experiment **IV**) and the $\text{Ca}(\text{OH})_2$ (experiment **V**) were used. For this the same seawater as in experiment **V** was used adding up to 13.3 g brucite or 2 g $\text{Ca}(\text{OH})_2$ per kg of seawater and measuring TA after 24 hours (see attached data tables for details). The same bottles (500 ml PC flasks) and experimental setup (shaking table) than in experiment **V** was used.

2.3 Measurements

180 Immediately after the end of an experiment each sample was filtered (0.2 μm - using Nalgene filtration bottles) to stop possible further reaction on larger particles and remove the biomass from the biotic approaches for further analysis. While filtering, all systems were kept airtight as much as possible to prevent gas exchange with the atmosphere. Samples which were analyzed for DIC were filtered with a peristaltic pump and an attached 0.2 μm syringe filter to minimize the air exchange. Samples were measured for total alkalinity (TA), pH, salinity, conductivity, temperature, and biotic samples from experiment **I** and **II** for 185 dissolved inorganic carbon (DIC). TA was determined by titration with 0.1 M hydrochloric acid within an 862 Compact Titrosampler (Metrohm) - for samples of day 46 and 90 in experiment **III** and all samples of experiment **V** a different titrator (888 Titrand, Metrohm) with a 0.02 M hydrochloric acid was used. DIC was analysed by infrared absorption, using a LI-COR LI-7000 on an AIRICA system (MARIANDA, Kiel). Calibration of TA and DIC measurements was determined against certified reference materials (CRM batches 143 and 190), supplied by A. Dickson, Scripps Institution of Oceanography (USA).

190 Single determinations were made for TA measurement, except for experiments Ia and IIa, which were made on two technical replicates. DIC was measured on 2-3 technical replicates. Final values are numerical averages of these replicates. To analyse for pH, salinity, conductivity and temperature a WTW multimeter (MultiLine® Multi 3630 IDS, pH-probe: SenTix 940 pH-electrode, conductivity: TetraCon 925 cell, Xylem) was employed. The pH-probe was calibrated with WTW buffer solutions according to NIST/PTB in 4 steps (1.679-9.180 at 25°C) For the TetraCon 925 cell 0.01 mol/L KCl calibration standards for 195 conductivity cells (WTW, traceable to NIST/PTB) was used.

Variables such as DIC, pCO_2 or aragonite saturation state ($\Omega_{\text{aragonite}}$) were calculated using measured values of TA and pH (or DIC in case of experiment **Ib** and experiment **IIb**) with CO2SYS version 2.5 Excel sheet (Pierrot et al., 2006), including error propagations based on Orr et al. (2018). The constants in CO2SYS were set to: Lueker et al. (2000) for K1 and K2; Dickson (1990) for KHSO_4 ; Dickson and Riley (1979) for KHF and Uppström (1974) for $[\text{B}]_T$ Value, while using the seawater pH 200 scale. were used. Filtrates of experiment IIa (day 0, 1 and 4) and V (day 10) were analyzed by scanning electron microscopy

(SEM) using a Tabletop Microscope Hitachi TM4000plus equipped with an Energy-dispersive X-ray spectroscopy (EDX – Bruker Q75), to provide data for the elemental composition and a visual impression of precipitates.

3 Results

3.1 Experiment I: Equilibrated alkalinisation

205 By adding defined amounts of a $\text{NaHCO}_3/\text{Na}_2\text{CO}_3$ solution, CO_2 -equilibrated $\Delta\text{TA}_{\text{added}}$ steps of 300 $\mu\text{mol/kgw}$ for abiotic and 150 $\mu\text{mol/kgw}$ for biotic approaches was achieved, yielding a range from ΔTA_0 ($\text{TA}_{\text{final}} = 2,411 \mu\text{mol/kgw}$, $\Omega_{\text{aragonite}} = 3.5$, pH = 8.07) up to ΔTA_{2400} ($\text{TA}_{\text{final}} = 4,750 \mu\text{mol/kgw}$, $\Omega_{\text{aragonite}} = 11.4$, pH = 8.36) for the abiotic and ΔTA_{1200} ($\text{TA}_{\text{final}} = 3,567 \mu\text{mol/kgw}$, $\Omega_{\text{aragonite}} = 6.4$, pH = 8.15) for the biotic experiment (Fig. 1). Achieved additions vary slightly from the targeted additions. The seawater TA was monitored after the initial alkalinity addition to determine if any alkalinity was lost 210 subsequently due to carbonate phase formation processes. The alkalinity enhancement has taken place almost in a linear manner close to ideal ('1:1' dotted-grey line in Fig. 1a and d). As the solution was initially CO_2 -equilibrated with current atmospheric conditions, DIC, $\Omega_{\text{aragonite}}$ and pH-value increased proportionally. No detectable loss in TA was observed after 1 and 4 days following the initial TA addition at time 0 for either the abiotic (0.2 μm filtered) or in the biotic (55 μm filtered) treatment, including living planktonic organisms. $\Omega_{\text{aragonite}}$ values remained with its highest value of 11.4 just below the critical 215 threshold of around 12.5 for $\Omega_{\text{aragonite}}$ at salinity of 36.5 (corresponding to $\Omega_{\text{calcite}} \sim 19$ as identified by Morse and He (1993)), and prevented a potential loss of alkalinity due to precipitation. The pH-value followed a quasi-linear trend with $\Delta\text{TA}_{\text{added}}$, and increased to 8.36 for the abiotic ΔTA_{2400} treatment (Fig. 1c). A relatively small decline in pH and $\Omega_{\text{aragonite}}$ in the abiotic, equilibrated experiment can be observed.

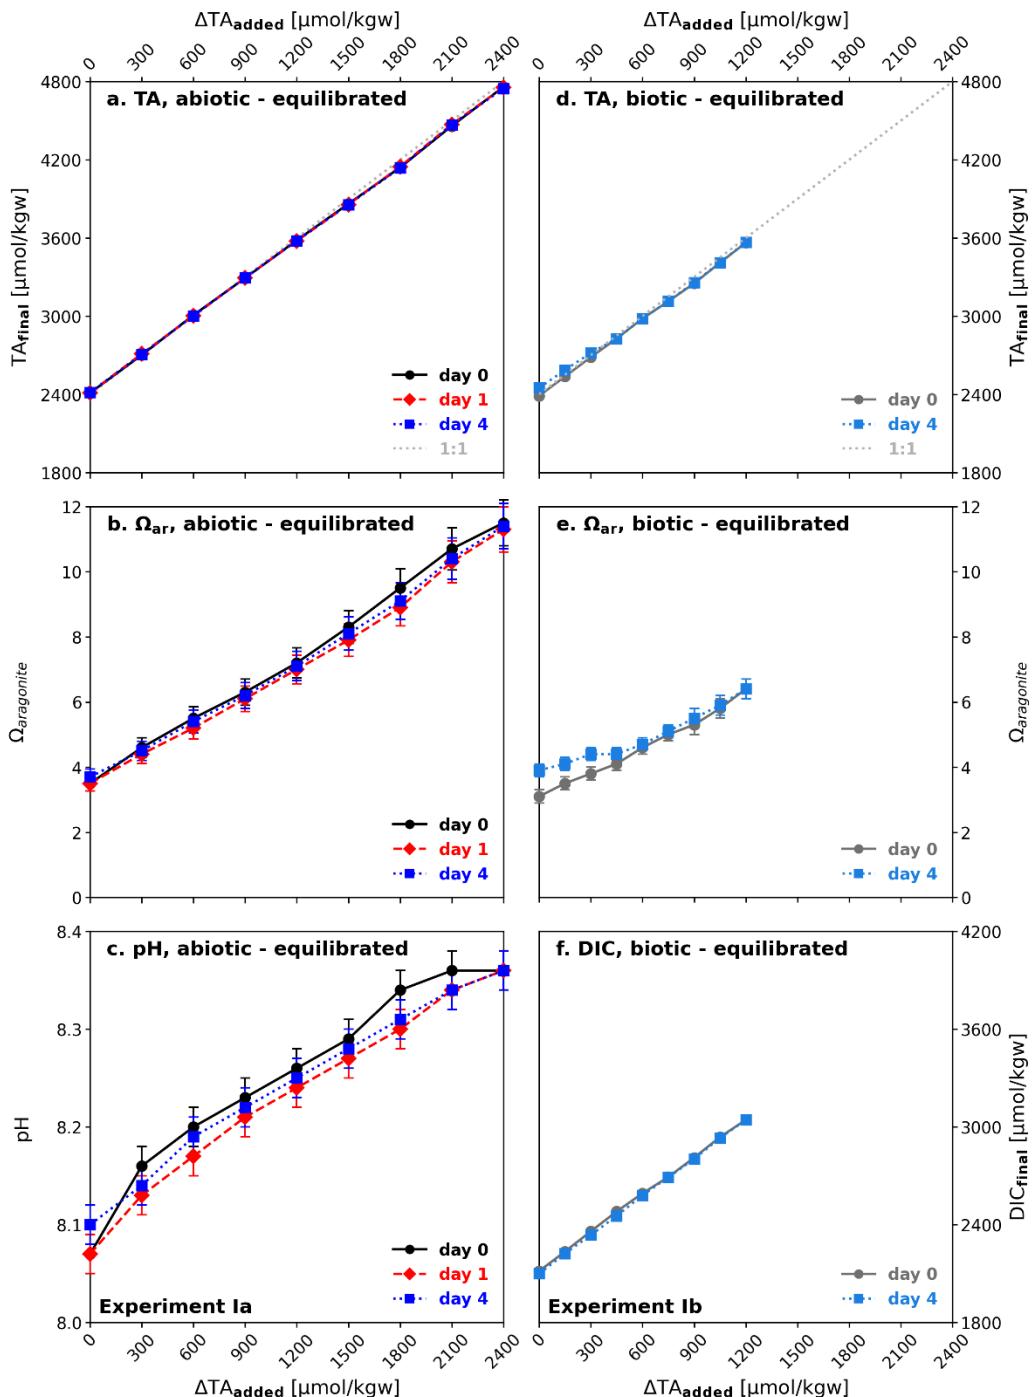


Figure 1: Temporal development after CO_2 equilibrated alkalination: (a, b, c) experiment Ia, (d, e, f) experiment Ib; (a, d) $\Delta\text{TA}_{\text{added}}$ vs. TA_{final} ; (b, e) aragonite saturation state ($\Omega_{\text{aragonite}}$) in relation to $\Delta\text{TA}_{\text{added}}$; (c) pH in relation to $\Delta\text{TA}_{\text{added}}$; (f) $\text{DIC}_{\text{final}}$ in relation to $\Delta\text{TA}_{\text{added}}$. Black/grey symbols correspond to start of the experiment, red after 1 day and blue after 4 days. $\text{TA}_{\text{initial}}$ conditions of used seawater: $\Delta\text{TA}_0 \approx 2,411 \mu\text{mol/kgw}$, $\Omega_{\text{Ar}} = 3.5$, $\text{pH} = 8.07$.

3.2 Experiment II: Non-equilibrated alkalinisation

225 In the non-equilibrated experiments II, solely TA was increased by using a 0.5 M NaOH stock solution while DIC remained at the initial seawater level of 2,120 $\mu\text{mol/kgw}$. Equilibration with the atmosphere was inhibited by closing the sample containers airtight. $\text{TA}_{\text{initial}}$ increased at the highest level (ΔTA_{2400} with target level of $\sim 4,800 \mu\text{mol/kgw}$) to only 4,622 $\mu\text{mol/kgw}$ (TA_{final}) in the abiotic approach, with $\Omega_{\text{aragonite}} \sim 28$ and a pH of 9.80. An immediate precipitation of 0.1-2 cm long mineral needles was observed floating in the abiotic reactor bottles just seconds after TA addition, suggesting nucleation

230 happens in the water. Precipitation on the wall of the vessel was not visible by eye. This is also reflected by a slight deviation from the idealised TA-addition line in Fig. 2a ('1:1' dotted-grey line), which indicates a noticeable decrease for the two highest TA additions (ΔTA_{2100} and ΔTA_{2400}). ΔTA_0 to ΔTA_{1800} maintained their intended alkalinity in both the abiotic and biotic treatments on day 0. After 1 day alkalinity loss can also be observed for ΔTA_{1800} . The decline in TA for the three highest TA additions was now accompanied by visible precipitation on the inner wall of the reactors, suggesting that at this stage wall

235 surfaces of the vessel acted as nucleation points. Alkalinity loss continued and on day 4 was also detected in the next lower treatment. At this stage the alkalinity in the four highest treatments dropped below values prior to alkalinity addition, marking a net loss of alkalinity compared to the initial seawater water level. Associated to this, $\Omega_{\text{aragonite}}$ declined to values of 5.6 to 6.3 on day 4 (Fig. 2b), approaching the initial value of ~ 3.5 pH, on the other hand, remained comparatively high, with only small decreases of 0.3-0.4 units down to values of 9-9.5 (Fig 2). In the abiotic treatments ΔTA_0 to ΔTA_{1200} alkalinity was stable and

240 no precipitation was observed within the first four days. In contrast, in the biotic setup alkalinity loss already occurred in ΔTA_{1050} and ΔTA_{1200} treatments at least on day 4, i.e. at lower alkalinity additions than in the abiotic treatments (Fig. 2d), with corresponding declines in $\Omega_{\text{aragonite}}$ and DIC (Fig. 2e and f).

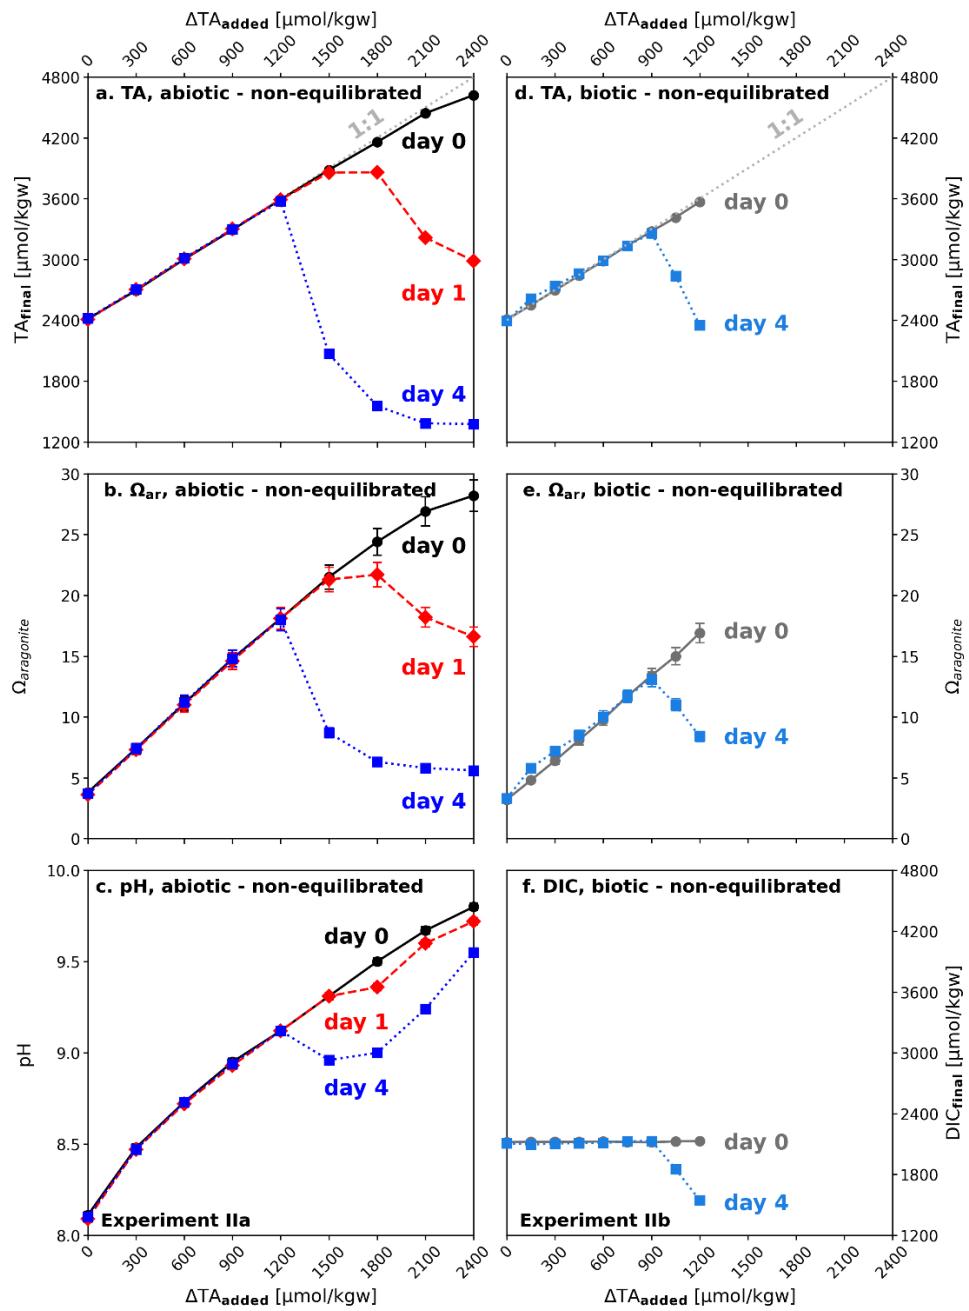


Figure 2: Temporal development after non-equilibrated alkalinisation: (a, b, c) experiment IIa, (d, e, f) experiment IIb; (a, d) $\Delta\text{TA}_{\text{added}}$ vs. TA_{final} ; (b, e) aragonite saturation state ($\Omega_{\text{aragonite}}$) in relation to $\Delta\text{TA}_{\text{added}}$; (c) pH in relation to $\Delta\text{TA}_{\text{added}}$; (f) $\text{DIC}_{\text{final}}$ in relation to $\Delta\text{TA}_{\text{added}}$. Black/grey symbols correspond to start of the experiment, red after 1 day and blue after 4 days. Note the different ranges of $\Delta\text{TA}_{\text{added}}$ in the abiotic and biotic set-up. The slightly higher start $\Omega_{\text{aragonite}}$ for the biotic treatment at day 4 compared to day 1 is because $\Omega_{\text{aragonite}}$ was calculated by TA and DIC, while for the abiotic experiment using TA and pH.

3.3 Experiments I & II: TA/DIC development in equilibrated versus non-equilibrated alkalinisation

250 While in the experiment simulating equilibrated alkalinisation TA and DIC were added (as NaHCO_3 and Na_2CO_3) in proportions (Fig. 3a, c) to maintain close to atmospheric CO_2 levels, in the non-equilibrated alkalinisation experiment only TA was added (as NaOH) (Fig. 3b, d), simulating alkalinisation without any CO_2 equilibration. Whereas the former yielded comparatively moderate changes in seawater carbonate chemistry, with $\Omega_{\text{aragonite}}$ values remaining below the critical threshold of around 12.5 (identified by Morse and He, 1993), the non-equilibrated approach caused strong changes in the carbonate system with $\Omega_{\text{aragonite}}$ values above 20 for ΔTA_{1500} to ΔTA_{2400} and between 15 and 17 for ΔTA_{1050} to ΔTA_{1200} , i.e. well above the critical threshold. Consequently, while precipitation was absent in the abiotic and biotic set-up in the equilibrated treatment, strong alkalinity loss through precipitation occurred in the non-equilibrated experiment. While in the biotic set-up precipitation was observed at ΔTA_{900} and ΔTA_{1200} (starting $\Omega_{\text{aragonite}}$ 15 and 18, Fig. 2b), in the abiotic set-up precipitation only occurred at and above ΔTA_{1500} , with no detectable precipitation at ΔTA_{1050} and ΔTA_{1200} (starting $\Omega_{\text{aragonite}}$ 15 and 17, Fig. 2e). The loss-
260 ratio in TA:DIC was about 2:1 (Fig. 3b, d) in all treatments, indicating the loss of alkalinity due to the precipitation of carbonates. Loss-ratio in TA:DIC for the abiotic set-up were 2.1 for ΔTA_{1500} , 2.1 for ΔTA_{1800} , 2.0 for ΔTA_{2100} , and 2.0 for ΔTA_{2400} and for the biotic set-up 2.1 for ΔTA_{1050} and 2.1 for ΔTA_{1200} .


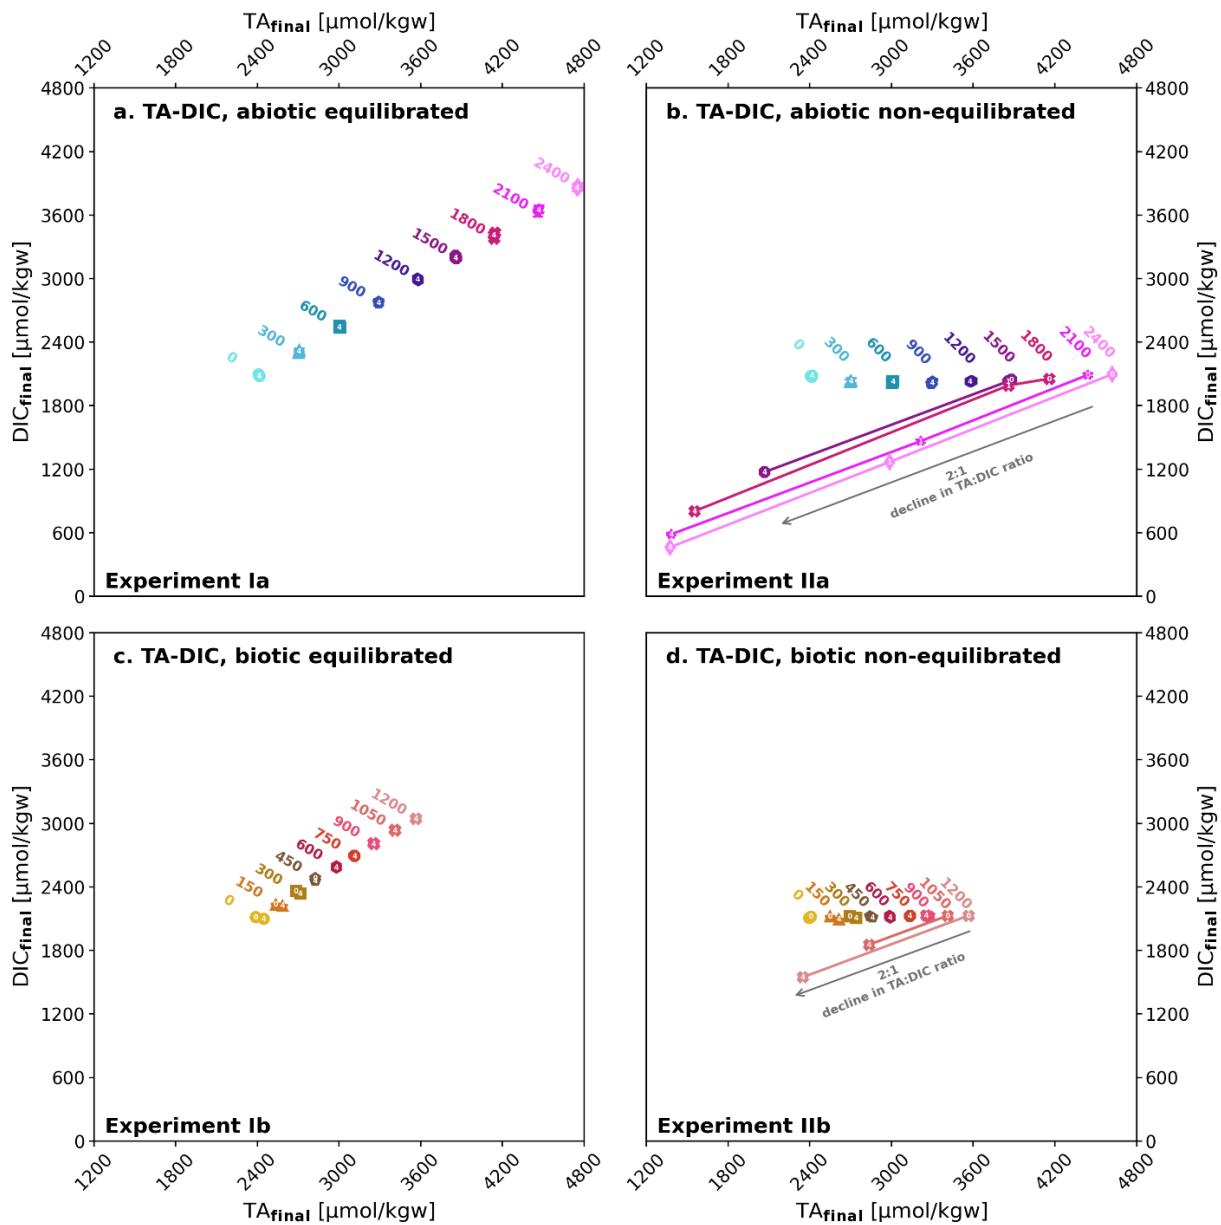


Figure 3: TA_{final} versus DIC_{final} at the start of the experiments I and II and after precipitation; (a-b) abiotic after 0, 1 and 4 days, (c-d) biotic after 0 and 4 days, equilibrated alkalisation (left, experiment I), non-equilibrated alkalisation (right, experiment II). The TA:DIC change ratio of 2:1 indicates that alkalinity loss was due to carbonate precipitation. Sampling days (0, 1 and 4) are written on top of each datapoint marker. Due to overlapping in case of no change in data, the marker description is set up to down. The grey arrows in b. and d. indicate an ideal 2:1 decline in TA:DIC.

3.4. Experiment III: Long-term stability of added alkalinity in CO₂ equilibrated approach

270 Experiment III was an extension of experiment I, testing for the long-term (up to 90 days) stability of added alkalinity in the two highest treatment levels (abiotic, ΔTA_{2100} & ΔTA_{2400}), where for ΔTA_{2400} the start $\Omega_{\text{aragonite}}$ is 11.4, close to the critical $\Omega_{\text{aragonite}}$, while for ΔTA_{2100} $\Omega_{\text{aragonite}} \sim 10.3$. Without adding extra particles for the treatment ΔTA_{2100} just 50 $\mu\text{mol/kgw}$ TA were lost after 90 days, while the loss is significantly higher in case of the treatment ΔTA_{2400} (-693 $\mu\text{mol/kgw}$ $\Delta\text{TA}_{\text{loss}}$), which was closer to the $\Omega_{\text{aragonite}}$ of about 12.5, identified as being critical for using filtered seawater. While untreated approaches 275 have shown stable values in the first 10 days of runtime, an immediate and persistent decline in TA_{final} could be observed for the treatments with added precipitates from previous experiments, functioning as seed material. ΔTA_{2100} with particles decreased by 199 $\mu\text{mol/kgw}$ after 10 days and 757 $\mu\text{mol/kgw}$ after 90 days, while the ΔTA_{2400} treatment dropped by 258 $\mu\text{mol/kgw}$ after 10 days and 945 $\mu\text{mol/kgw}$ after 90 days, see Fig. 4a.

280 As in experiment II precipitation at the walls of the reactors were observed. As the treatments here are close to the supersaturation level where naturally carbonate formation starts, it cannot be ruled out a wall effect caused in the setup with ΔTA_{2400} without extra particles the higher loss compared to ΔTA_{2100} . Nonetheless experiments in the free water would not face such a wall-effect problem but might be facing a comparable fate due to other surfaces abundant like naturally occurring particles.

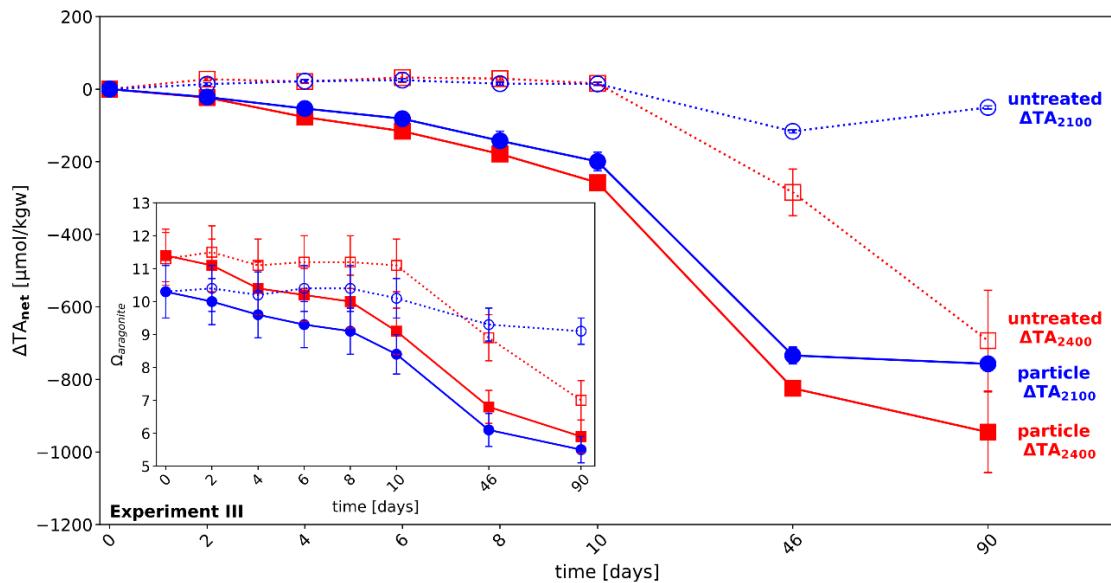

285 **Figure 4: Long-term stability of added alkalinity in CO₂ equilibrated approach:** development of alkalinity loss ($\Delta\text{TA}_{\text{loss}}$) over time in the two highest alkalinity treatments of experiment I, ΔTA_{2400} (red) and ΔTA_{2100} (blue), in untreated mode (dotted lines) and with particle addition (solid line) over time. Insert: Development of $\Omega_{\text{aragonite}}$ in the above treatments. Error bars denote standard deviations of two measures, except for untreated ΔTA_{2100} where only one measurement was taken due to technical problems.

3.5 Experiment IV: Alkalinity addition with brucite

290 Unlike in the equilibrated and non-equilibrated experiments **I** and **II**, in which an alkaline solution was applied, brucite ($\text{Mg}(\text{OH})_2$) was added as a solid to enhance alkalinity. While $\text{NaHCO}_3/\text{Na}_2\text{CO}_3$ (equilibrated) and NaOH (non-equilibrated) were fully dissolved in the stock solutions after seconds to several minutes, $\text{Mg}(\text{OH})_2$ dissolved relatively slowly. Due to a comparatively moderate reactivity in seawater, it never reached the point of full dissolution, with the exception of the ΔTA_{600} treatment, which is relatively close to the theoretical solubility of brucite in seawater (determined using PHREEQC, 295 equilibrating seawater with atmospheric conditions) that corresponds to an increase of $\Delta\text{TA}_{\text{added}}$ of $\approx 500 \mu\text{mol/kgw}$ (Fig. 5d). The consequences were transparent to increasingly blurry suspensions, dependent on the added amounts of material. Except from the ΔTA_{600} each reactor had visible residua at the bottom, right after the addition of the solid material. Consequently, the target $\Delta\text{TA}_{\text{added}}$ steps have not been reached like in the equilibrated and non-equilibrated treatments in experiments **I** and **II**. This also counts for the highest dosage of 1,000 mg, corresponding to $\Delta\text{TA}_{\text{added}}$ of 34,288 $\mu\text{mol/kgw}$, see Fig. 5a and d.


300 Excluding the highest dosage, after the addition of brucite I, TA_{final} reached only 2,746 $\mu\text{mol/kgw}$ ($\Delta\text{TA}_{\text{net}} = 335 \mu\text{mol/kgw}$) for the target of ΔTA_{2400} at day 0, while for brucite II maximum increase in TA_{final} was achieved at day 1 for ΔTA_{600} . After 1 day of runtime no treatment achieved the target TA_{final} values (Fig. 5a). TA collapsed in all reactors below or close to the initial seawater level at day 4 with exception of biotic treatment ΔTA_{600} . The decline of TA occurred in the form of a ‘runaway precipitation’ as labelled by Moras et al. (2021), meaning carbonate formation causes lower TA-levels than the initial values.

305 This process led to lower TA_{final} values with higher amounts of added brucite at the end of the experiments. $\Omega_{\text{aragonite}}$ was enhanced moderately up to a maximum of 7.1 in the bulk solution in the abiotic ΔTA_{2400} reactor at day 0, then increased to 11.7 after day 1, and finally declined to relative stable values of 6.0-7.5 after 4 days. pH-values also just experienced a slight increase up to 8.4 at day 0, reached values of 8.4-8.6 in regular steps after 1 day and continued rising in the same stable proportions to 8.5-9.0 (also see Fig. 5c.).

310 While brucite I formed aggregates of particles being insoluble for the duration of the experiment, brucite II (a commercial product for industrial use optimized) did not form aggregates and dissolved more efficiently, leading to higher TA_{final} -levels at day 0. Comparably to brucite I, $\Delta\text{TA}_{\text{net}}$ levels for brucite II declined in the following four days well below $\text{TA}_{\text{initial}}$ for treatments $> \Delta\text{TA}_{600}$, declining to $\text{TA}_{\text{final}} \sim 1,200 \mu\text{mol/kgw}$ for $\Delta\text{TA}_{1800-2400}$, while $\Omega_{\text{aragonite}}$ for the same range consistently reached values of ~ 5 , or lower. Only ΔTA_{600} remained slightly

315 above the initial seawater TA level after 4 days, but also declined significantly compared to day 0. For experiment **IV** all treatments showed the same general trends, independent of treatment (abiotic, biotic) or type of brucite.

The high $\Delta\text{TA}_{\text{added}}$ approach using 1,000 mg brucite (corresponding to a theoretical solid material TA addition of 34,288 $\mu\text{mol/kgw}$) reached TA_{final} values above 4,000 $\mu\text{mol/kgw}$ at day 1, an $\Omega_{\text{aragonite}}$ of 20 and pH-values of 9.6. Immediate precipitation at the base of the bottles was observed. The total TA_{final} increase on day 0, however, is on the same general trend.

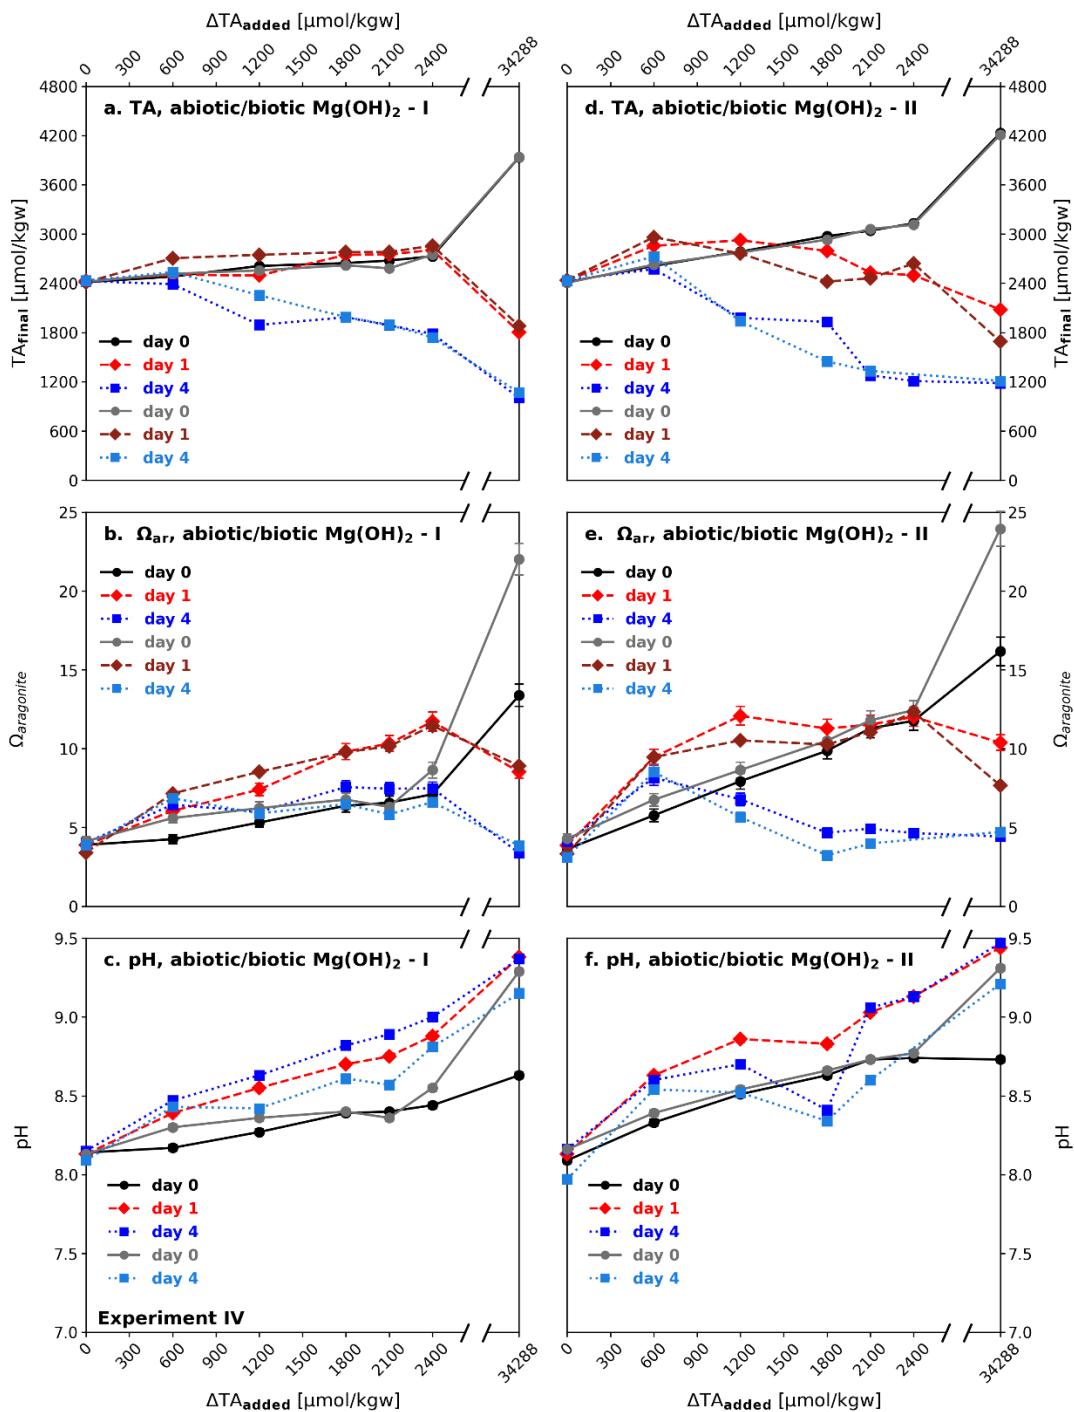

320 **Figure 5: Dissolution of particulate brucite (types I and II) over time in experiment IV;** (a, d) development of alkalinity (TA_{final}), (b, e) aragonite saturation state ($Q_{aragonite}$) and (c, f) pH immediately after addition (day 0 – black/grey), 1 day (red) and 4 days after (blue); abiotic treatments – black, red and dark blue graphs, biotic – grey and light blue graphs. Brucite additions range from 19.2 mg (ΔTA_{600}) to 1,000 mg ($\Delta TA_{34,288}$). Comparable trends are observed in all treatments, independent of substrate type (brucite I and II) and set-up (abiotic/biotic).

3.6 Experiment IV: TA/DIC evolution brucite

325 Although for some treatments the TA:DIC development from day 0 to 1 shows some $\Delta\text{TA}_{\text{final}}$ increase, loss in $\Delta\text{DIC}_{\text{final}}$ is the general pattern (Fig. 6). Towards day 4 a net loss of $\Delta\text{TA}_{\text{net}}$ and $\Delta\text{DIC}_{\text{net}}$ can be observed in most treatments. The TA:DIC change ratio thereby differs from that observed in experiment **II**, where a ratio of 2:1 indicated pure carbonate precipitation, in this case it ranges between 1.2:1 and 1.9:1, clearly showing that in parallel to carbonate precipitation brucite dissolution was still ongoing. In all four treatments there is a tendency of higher TA:DIC change-ratios with higher brucite addition, indicating 330 alkalinity loss due to carbonate precipitation to increase relative to the alkalinity gain due to brucite dissolution. The higher TA:DIC ratios for brucite II (1.6:1 to 1.9:1) compared to brucite I (1.2:1 to 1.7:1) indicate higher carbonate precipitation for the former.


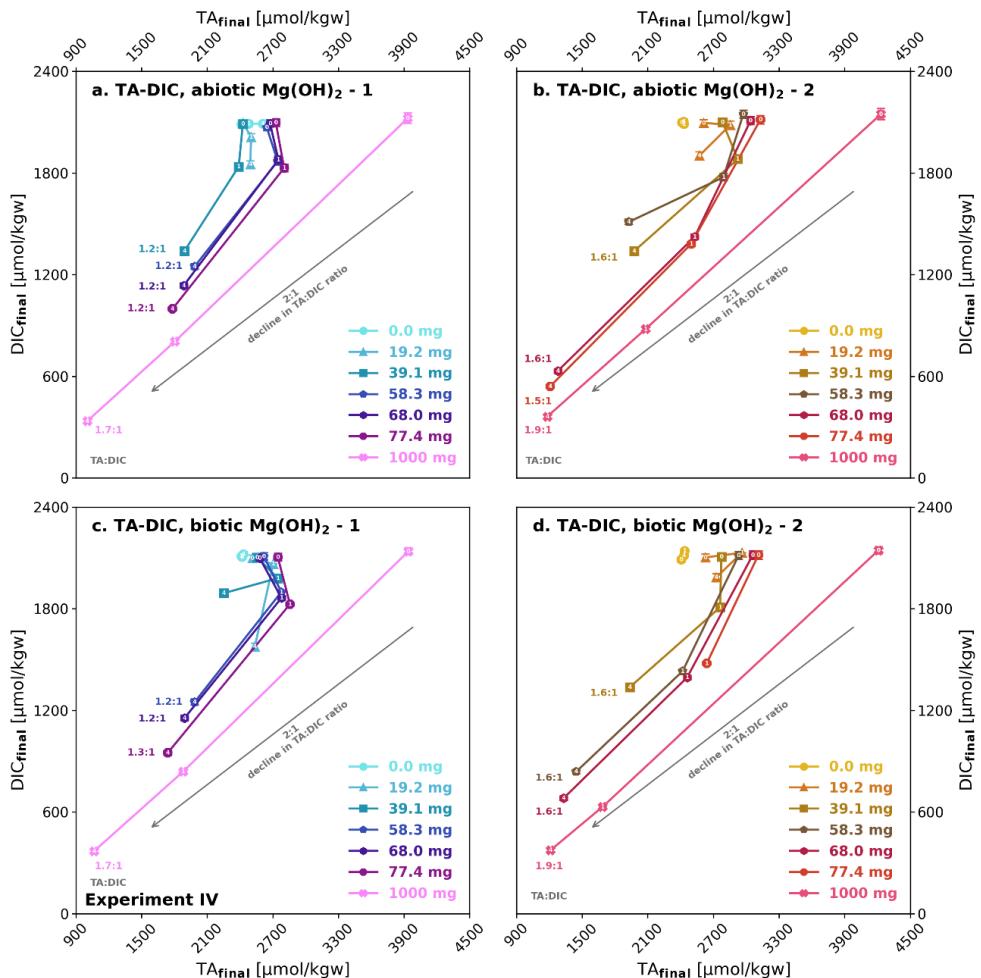


Figure 6: Development of TA_{final} versus $\text{DIC}_{\text{final}}$ during brucite dissolution in experiment IV; (a, b) abiotic after 0, 1 and 4 days, (c, d) biotic after 0 and 4 days. The days of sampling (0, 1 and 4) are written on top of each data point marker. TA:DIC change ratios for brucite I (1:1.2) and brucite II (1:1.6) are indicating simultaneous precipitation and dissolution, while their difference could be described by their differing dissolution characteristics. The grey arrows indicate an ideal 2:1 decline in TA:DIC.

3.7. Experiment V: Alkalinity recovery after mineral precipitation due to CO_2 equilibration with time


This experiment was intended to test for possible recovery of alkalinity after its loss due to mineral precipitation. Addition of 0.66 g/kgw $\text{Ca}(\text{OH})_2$ and its fast dissolution led to an immediate collapse of alkalinity down to 832 $\mu\text{mol/kgw}$ within 15 minutes, losing more than half of the initial seawater alkalinity (Fig. 7). At the same time pH increased to above 10 and $\Omega_{\text{aragonite}}$ to about 9.5. In the following hour part of the alkalinity recovered, while $\Omega_{\text{aragonite}}$ further increased, accompanied by a steady decline in pH, caused by invasion of CO_2 into the water. After an hour $\Omega_{\text{aragonite}}$ and TA_{final} started to decline for the next 48 hours. After that a shift in the carbonate system causes a drastic decline in pH (inflection point at hour 60.4 at pH 8.988) and slight increase in TA_{final} , indicating that despite declining $\Omega_{\text{aragonite}}$ some lost alkalinity recovers, which is likely due the redissolution of carbonate forms, not crystallized yet into stable calcite or aragonite. The results show that it is possible to recover, on a time scale of days, some of the lost alkalinity, but despite using a shaking bath to accelerate CO_2 invasion, even after 10 days about half of the initial alkalinity remains lost and the $\Omega_{\text{aragonite}}$ levelled off below the start values.

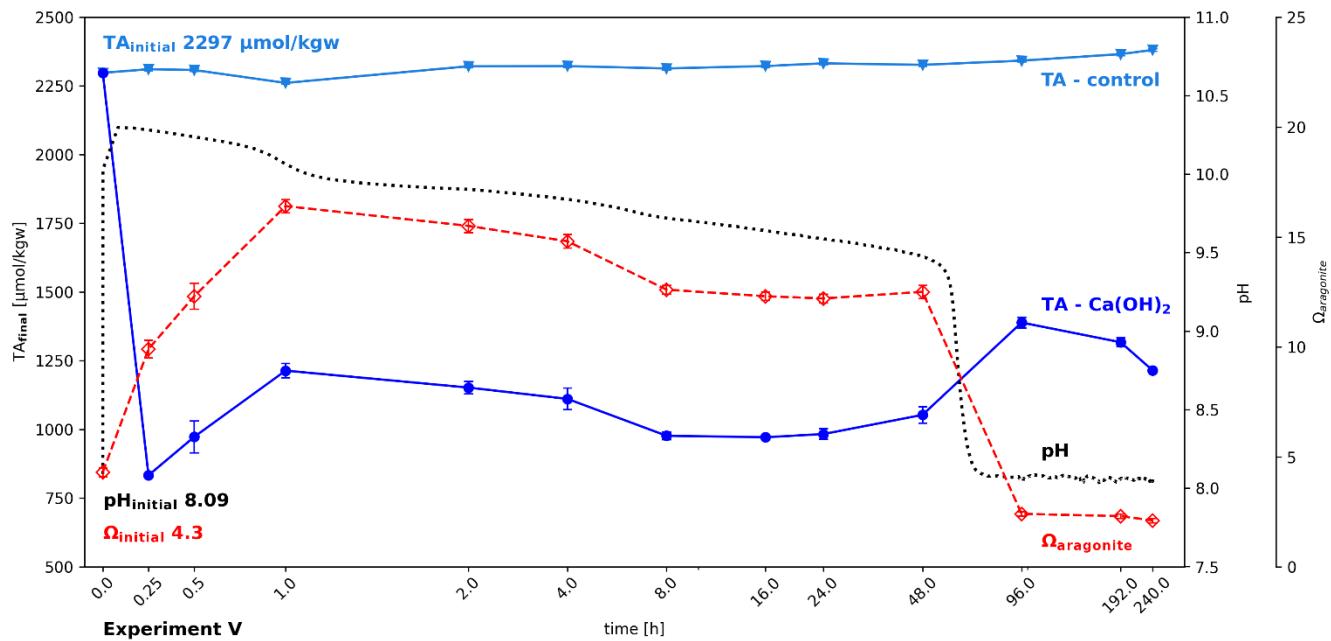

350 **Figure 7: Partial recovery of alkalinity after carbonate precipitation;** Change in alkalinity, pH and $\Omega_{\text{aragonite}}$ after adding 0.66 g $\text{Ca}(\text{OH})_2$ / kgw to North Sea water in a shaking bath (simulating wave processes to allow accelerated air-water- CO_2 -exchange). $\text{Ca}(\text{OH})_2$ dissolution is so fast, that it is hard to track. While the water gradually equilibrates with the atmosphere, a series of loss and gain of alkalinity can be observed.

3.8 Experiment VI: Threshold of alkalinity addition to avoid carbonate precipitation

355 The addition of increasingly larger amounts of $\text{Mg}(\text{OH})_2$ confirms that the increase in $\Delta\text{TA}_{\text{added}}$ after 24 hours stops at $\Omega_{\text{aragonite}}$ close to 12.5 (Fig. 8a). For larger additions net loss of alkalinity was generated, which would subsequently lead to CO_2 evasion. In the case of $\text{Ca}(\text{OH})_2$ (Fig. 8b) the net loss switches to alkalinity gain at the highest addition. However, the measured increase in alkalinity ($\sim 21,000 \mu\text{mol/kgw}$) is less than expected, based on the mineral addition ($\sim 27,000 \mu\text{mol/kgw}$), suggesting a lower efficiency and therefore higher costs of application. In later experiment, the highest dosage of added $\text{Ca}(\text{OH})_2$, shows that still 360 a gain in TA can be achieved. Therefore, two threshold types are demonstrated with this experiment and experiment **IV**: one showing that a threshold level for losing alkalinity after adding a certain amount of solid alkalinity exist, based on material quality, and one gaining at higher levels TA by adding excess solid alkalinity to seawater with a high enough dosage. Interestingly, this effect is not visible using $\text{Mg}(\text{OH})_2$ at given higher amounts added, suggesting material specific behaviour 365 with different outcome for OAE application. In case of brucite, an important difference to experiment **IV** is the use of a shaking bath, likely making the influence of particle surface processes less effective due enforced advection of water around the particle surfaces. In addition, the shaking conditions causing faster exchange of CO_2 with the atmosphere do not reflect water bodies directly below the sea surface.

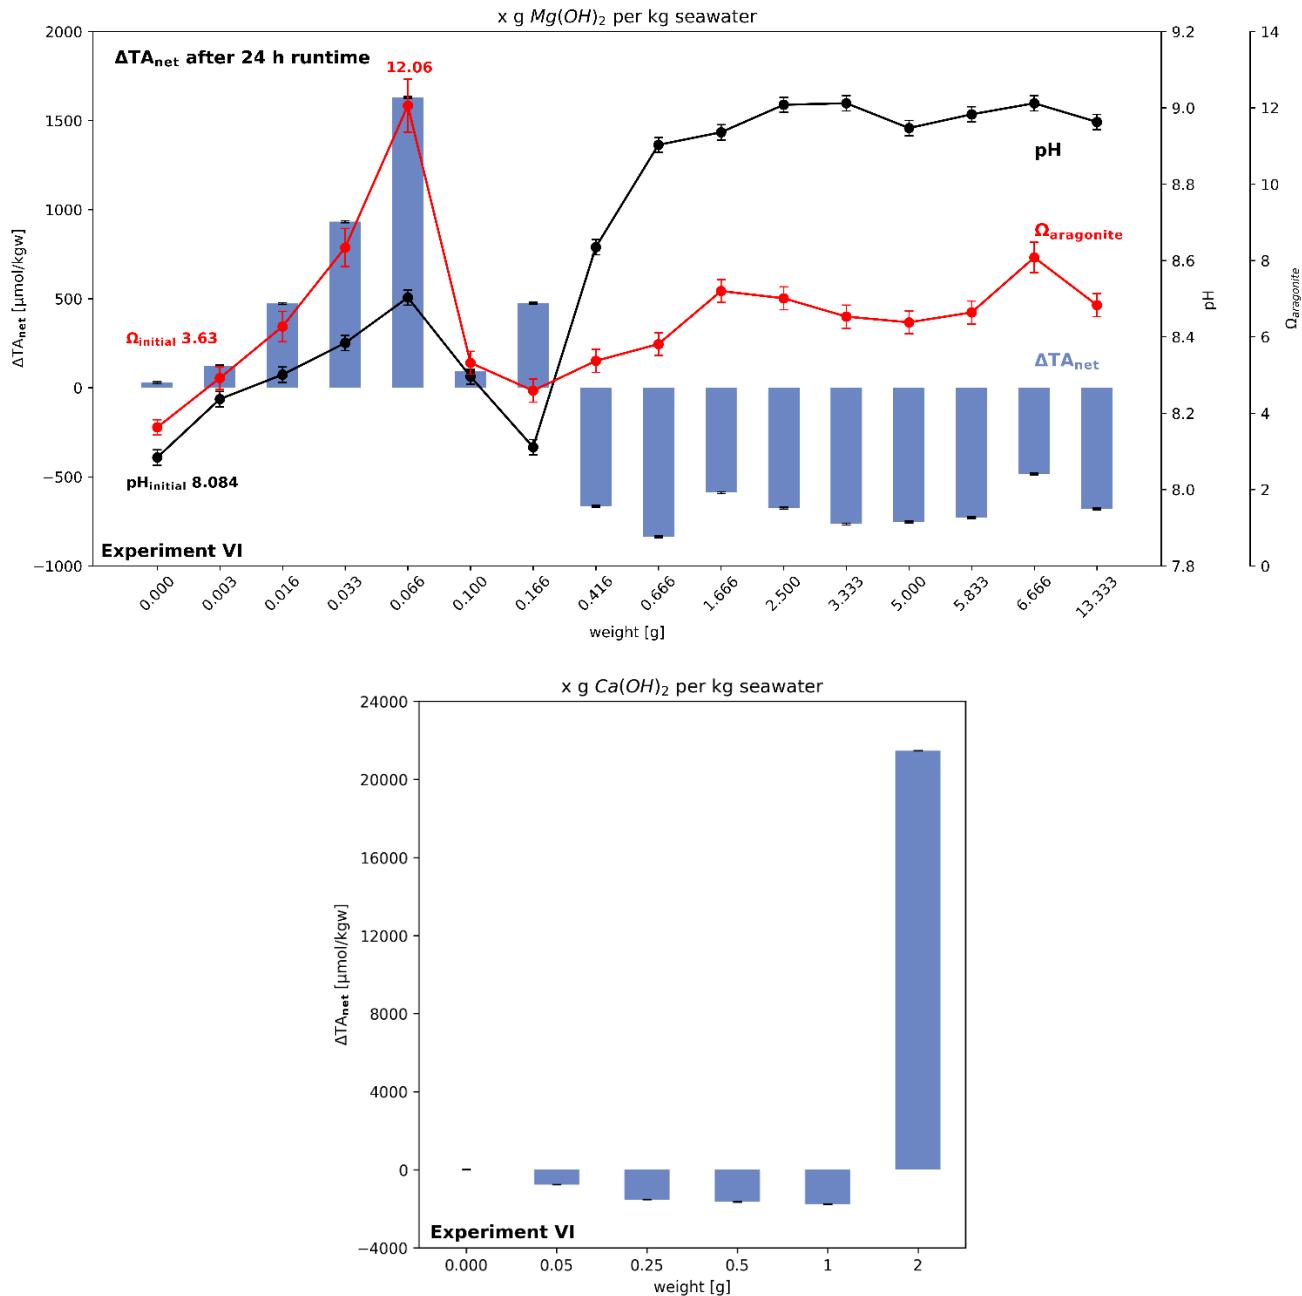

370 **Figure 8:** Change in alkalinity after adding $Mg(OH)_2$ or $Ca(OH)_2$ to North Sea water in a shaking bath (simulating wave processes to allow
accelerated air-water- CO_2 -exchange). (a) Net loss occurs when alkalinity addition exceeds the critical saturation level of aragonite, while in
(b) it is shown, using $Ca(OH)_2$ that for high added amounts of solid the $\Delta T A_{\text{net}}$ -loss can be turned into a gain. Note for data in 8b no pH
values are available for calculation of aragonite saturation levels.

3.9 SEM images of precipitates

An overview of the shapes and occurrence of calcium carbonate precipitates formed during the loss of alkalinity is provided
375 in Figure 9. They were derived from experiments IIa (ΔTA_{2400} , NaOH – non-CO₂-equilibrated, Fig. 9a-c) and V (ΔTA_{5400} ,
Ca(OH)₂, Fig. 9d) after four and ten days, respectively. The precipitates show a variety of symmetrical shapes and structures.
These ranged from spheres (or ellipsoids), the dominant variant in experiment IIa, to particles with a bi- or multipolar stem.
These stems formed spherical patterns on the tips with elongated crystals, creating porous surfaces. The overall growth patterns
showed the development from loosely attached and aligned needle-like crystals to stem-like structures (Fig. 9d) and finally
380 spheres. In general, all sighted samples of experiment IIa and V in which precipitation occurred show the same type and style
of precipitation, differing in size and quantity between higher alkalinity and temporal progressed treatments.

Fig. 9a gives a general overview, showing all varieties and development stages. Average sizes range from 30-50 μm , single
spheres in this evolved and high alkalinity treatment (ΔTA_{2400} , after 4 days) reached up to 80 μm in diameter. Fig. 9b shows a
cluster of partially developed precipitates. Bipolar stems with initial branching structures (I), a broken head of a developed
385 particle (II) from the side, a developed multipolar precipitate with 4-5 heads (III). (II) gives insight of the parallel-aligned
crystal growth patterns of the stem as well as the structures branching out. Overall, the “polarity” of each particle seems to be
determined in the early stages of formation, single needle-like crystals evolve into bipolar while early-stage crystal branching
grows into multipolar shapes. Fig. 9c IV offers a clean-cut cross section through merged components (α), a hollow undeveloped
390 stem (β), and a bipolar branched particle with a failed end which provides insight in the radial crystal growth structure of a
head (γ). Attached to (γ) is a secondary gypsum crystal which most likely formed during the filtration process, covering the
hollow root of the head. To give an overview of the elemental composition of the precipitates, an EDX analysis of (γ) was
added to the supplements (including elemental mapping). Atom percentages reached: $13.12 \pm 0.80\%$ for Calcium, $6.15 \pm 0.5\%$
for Magnesium, $32.63 \pm 4.95\%$ for Carbon and $46.03 \pm 8.15\%$ for Oxygen, indicating the composition of a Mg-rich calcium
carbonate mineral. 9c V shows an example of an almost closed sphere with the central stem still visible. 9c VI provides an
395 instance of a transition phase between a dumbbell shape to closed sphere with initial crystal growth bridging the gap between
the two heads and starting to overgrow the central stem. 9d gives a visual impression of the precipitates formed in experiment
V In comparison to the developed stages from experiment IIa primitive initial needle-like crystals and undeveloped stems are
dominating here. As opposed to experiment IIa where alkalinity declined steadily over 4 days, thereby allowing the growth of
more complex structures, the complete precipitation process for experiment V occurred in the first few minutes (see section
400 3.7), only allowing the formation of initial crystals. In addition, the mechanical movements during the permanent shaking
procedure might influence the general crystal formation patterns as well.

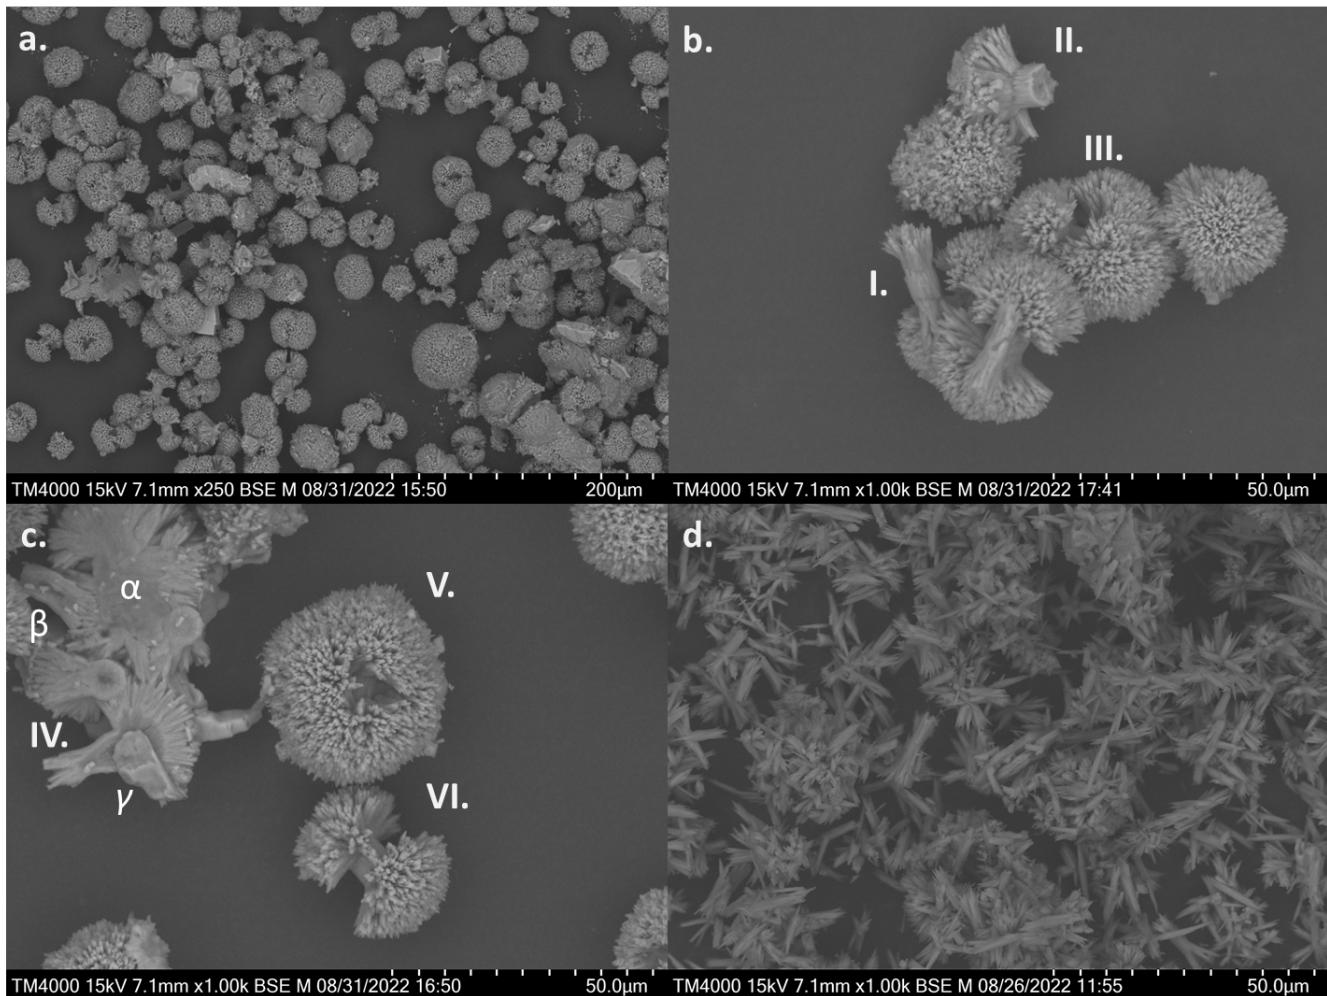


Figure 9: Selection of scanning electron microscope images of filtered precipitates from experiments IIa (non-CO₂-equilibrated – after 4 days) and V (Ca(OH)₂), a. overview of IIa, b. cluster of precipitates, c. detailed shot of precipitates and cross section through a cluster, showing the internal crystal growth structures, d. overview of precipitates from experiment V (Ca(OH)₂ – after 10 days)

405

4 Discussion

4.1 General discussion

410 Results show that the way alkalinity is added to the ocean is crucial to have sustained elevated alkalinity values, and more importantly, to avoid an alkalinity net-loss through carbonate precipitation. Major controlling factors are (i) the type of mineral used, (ii) whether TA is introduced in solid form or as a solution, (iii) in the case of a solution, if it is already enriched with DIC for $p\text{CO}_2$ -equilibrium with the atmosphere or not, and (iv) the presence of biogenic or mineral particles in seawater, affecting 'runaway precipitation' of carbonate (Moras et al., 2021) and associated net loss of TA.

415 In the approach using alkaline solutions equilibrated with atmospheric CO_2 (experiment **I**) no $\Delta\text{TA}_{\text{net}}$ loss was observed after 4 days, even at high $\Delta\text{TA}_{\text{added}}$. The reason is that the carbonate system (based on $\Omega(\text{ar})$ of the bulk solution) stayed within boundaries to avoid mineral precipitation for the duration of 4 days. In contrast, application of a solution with elevated alkalinity not equilibrated with atmospheric CO_2 (experiment **II**; compare Figs. 1 and 2) caused already at the first day a sustained loss of alkalinity, for the high alkalinity addition of 2,400 $\mu\text{mol/kgw}$ (Fig. 2). The reason is that, for the same 420 $\Delta\text{TA}_{\text{added}}$, perturbations of the carbonate system that affect mineral precipitation are much stronger in this non-equilibrated scenario, because alkalinity was added in the pure form of OH^- , while in the equilibrated experiment alkalinity was added in precalculated ratios of HCO_3^- and CO_3^{2-} to form a water being in equilibrium with the atmosphere. Consequently, treatments with non-equilibrated conditions in experiment **II** reflect water bodies not being able to equilibrate in time before a loss due 425 critical oversaturation happens, likely to be close below the seawater surface given the slow equilibration with the atmosphere (Jones et al., 2014). This would indicate that usage of reactors to prepare suitable CO_2 -equilibrated alkaline solutions should be considered for large scale OAE (see section below).

Relevant losses for the biotic treatment in experiment **II**, simulating non-equilibrium conditions, after four days were visible already for treatments with additions $> 900 \mu\text{mol TA/kgw}$ (Fig. 2). Results of experiment **II** indicate that a lack of condensation 430 nuclei in the filtered abiotic treatments prevented the start of precipitation at lower TA additions. The difference between biotic and abiotic treatments in experiment **II** is additional potential seed surface due to particles and plankton $>0.2 \mu\text{m}$ and $< 55 \mu\text{m}$, which may act as nucleation sites ('seed') for precipitation. In fact, this has resulted in loss of $\Delta\text{TA}_{\text{net}}$ at lower $\Delta\text{TA}_{\text{added}}$ levels in the biotic treatment. The loss ratio of TA and DIC ($\Delta\text{TA}:\Delta\text{DIC}$) of 2:1 (Fig. 3b, d) indicates that the precipitate is composed of carbonates. Comparable observations were made using quartz particles in Moras et al. (2021), because the abundance of potential surface nucleation sites lowers the threshold for alkalinity loss via precipitation.

435 Notably, once carbonate precipitation is initiated (Fig. 2), TA-loss does not stop at $\Omega_{\text{aragonite}}$ levels of 12.5-13.5 (corresponding to Ω_{calcite} levels of 19-20), which were reported (Morse and He, 1993) as threshold levels above which spontaneous carbonate nucleation occurs (in filtered seawater at 25°C and salinity of 35). The threshold for carbonate nucleation is more specific than

spontaneous carbonate formation and growth, e.g. on suitable surface providing optimal surface properties, with lower energy barriers than nucleation. Once the process of carbonate formation is triggered in this experiment it continues until a certain 440 specific thermodynamic equilibrium is reached, which may not have been reached considering the duration of the experiments. Experiment **III** demonstrates that the loss of alkalinity can start without particles also at lower than the described critical $\Omega_{\text{aragonite}}$ for filtered seawater if time is longer than 10 days and that the presence of carbonate precipitates from former experiments accelerated this process (Fig. 4). Precipitation of minerals at the surface of the walls of the experimental vessel without adding particles underlines the relevance of surfaces added and their quality as can be seen by the difference in $\Delta\text{TA}_{\text{net}}$ 445 for the cases adding carbonate precipitates and not to the bulk water (Fig. 4).

Experiment **IV** differs from experiments **I** to **III**, using alkaline solids $\text{Mg}(\text{OH})_2$ to produce alkalinity in the seawater while providing at the same time a reactive surface area. Carbonate formation and TA loss started in this experiment at $\Omega_{\text{aragonite}}$ well 450 below 12.5 of the bulk solutions. Dissolution-precipitation processes at the surface of the particles happen at the same time (Figs. 5 and 6), as indicated by the $\Delta\text{TA}:\Delta\text{DIC}$ change ratios in the bulk water between 1.2:1 and 1.9:1, clearly lower than 2:1 as expected for carbonate formation alone (compare experiment 2, Fig. 3). The differences in $\Delta\text{TA}:\Delta\text{DIC}$ change ratios for 455 brucite I (1:1.2) and brucite II (1:1.6) for moderate solid $\Delta\text{TA}_{\text{added}}$ treatments up to ΔTA_{2400} indicate significant product specific differences in simultaneous mineral dissolution and carbonate formation characteristics at their surfaces. This result calls for detailed product specific evaluation of solid alkaline materials before application, and quality control in case a certain material 460 might be identified as being useful. In addition, this finding suggests that simple modelling of alkalinity addition based on a given mineral type provides no realistic insights into real world ocean alkalinity enhancement applications. In addition, particle surface processes on added solid alkaline particles are to be considered. As shown in the equilibrated approach of experiment **III** with an added solute alkalinity instead of reactive particles, on longer time scales (here up to 90 days) also the presence of potential nucleation sites, in the form of suspended particles or other exposed surfaces, affect the stability of added alkalinity and hence have to be considered for OAE applications. Importantly, alkalinity loss processes identified in these laboratory 465 scale experiments need to be investigated in field trials for further verification and quantification.

4.2 Loss of alkalinity, carbonate formation, temporal stability and potential recovery of alkalinity

The question of potential recovery of lost alkalinity is even more complicated (experiment **V**, Fig. 7) and is a critical aspect 470 for OAE application: If lost alkalinity recovers after a certain time and target TA is reached, then such transient losses could be accepted. The simple experiment **V** with $\text{Ca}(\text{OH})_2$, lasting 10 days, illustrates that alkalinity consumed via carbonate formation may partly be released again, here probably facilitated by accelerated ingassing of CO_2 using a shaking bath (Fig. 7), 475 as indicated by the decline in pH after ~ 2.5 days. This shaking bath experiment may not be representative for open ocean application, but shows the problem to face, a net loss of TA under certain conditions. Future experiments should gain insights under which conditions a temporal loss of alkalinity can be accepted if a net increase would be the result. This was not achieved 480 in experiment **V**, but could be given different application scenarios or dilution in time (c.f. Moras et al., 2021).

470 In general, amorphous calcium carbonate (ACC) with variable proportion of Mg contents precipitates from water as a precursor prior to the crystallisation of minerals like aragonite or calcite via transformation processes (Rodriguez-Blanco et al., 2017). Direct calcite or aragonite precipitation from water occurs only at high supersaturation levels (Rodriguez-Blanco et al., 2017), which were exceeded in some of the experiments here.

475 The precursor ACC leading to an alkalinity loss via nucleation is not stable and can redissolve (Mergelsberg et al., 2020; Brečević and Nielsen, 1989; Clarkson et al., 1992), with reported solubilities more than 100 times larger than for calcite in pure water. Under which conditions ACC precursors formed during OAE can redissolve, to avoid longer-term alkalinity loss, and how fast mixing with untreated water has to be to avoid permanent loss of TA, is - based on few existing data .(c.f. Moras et al., 2021) - difficult to assess for OAE. Further experiments in context of OAE are therefore needed. A good understanding of mixing rates of treated and untreated water at OAE application sites is therefore critical to avoid permanent TA loss.

480 The observations from the threshold experiment **VI** (Fig. 8) are making the application more non-trivial, as an excess application of alkaline solids could cause an addition of TA instead of a loss, but with for now unknown consequences for ecosystems due temporal high pH-values above 9.5 for longer time (c.f. Fig. 7 using lower doses compared to excess addition in experiment **VI**).

485 In addition, solid particles of different quality, react differently if high application amounts per volume of seawater are used (Fig. 8). In the case of the used $\text{Ca}(\text{OH})_2$ a gain in $\Delta\text{TA}_{\text{net}}$ could be observed (Fig. 8b) using high dosages of material (2 g/kgw versus 1 g/kgw, which lead to a $\Delta\text{TA}_{\text{net}}$ loss). For the brucite instead, even adding 13 g/kgw lead not to a positive change in $\Delta\text{TA}_{\text{net}}$ after 24 hours. This simple experiment **VI** suggests that $\Delta\text{TA}_{\text{net}}$ -loss must not be necessarily the case using excess amounts of fast dissolving minerals at the costs of high pH-levels, local critical oversaturation levels, and lower efficiency. As long as consequences of such excess treatment of seawater are not well enough understood for sustainable OAE management, 490 the combination of results from the experiments **I** to **IV** suggest that adding alkalinity to the ocean should be undertaken such that the rate of increase in $\Delta\text{TA}_{\text{net}}$ is equal to or less than the rate of re-equilibration of atmospheric CO_2 to avoid critical oversaturation levels. Such control seems to be difficult to achieve with the direct addition of tested fine solids or highly alkaline liquids not in equilibrium with the atmosphere. It is possible to obtain greater control if a reactor is used to prepare a pre-equilibrated solution with elevated alkalinity without triggering precipitation ($\Omega_{\text{aragonite}} < \sim 12.5$, c.f. experiment **I** in Fig. 495 1b).

Before starting open ocean experiments, detailed model approaches are needed to assess these problems identified here: stability of added alkalinity, possible redissolution of temporary lost alkalinity, and excess application causing a $\Delta\text{TA}_{\text{net}}$ increase with co-precipitation of carbonates and possibly concerning duration of high pH-values. This in turn needs more laboratory or mesocosm scale experiments to determine which role particles, present in natural waters, play by lowering the 500 threshold level for potential $\Delta\text{TA}_{\text{net}}$ loss (c.f. experiment **IIa** and **IIb**, abiotic with biotic particles, or Wurgraft et al., 2021) to parameterize models. By now, there are simply not enough reliable data existing to allow for reliable, realistic model

calibration. A serious aspect considering that models are used to assess global and regional potential of OAE, which in turn is used to discuss which CDR-methods are to be considered for future global CDR-schemes.

Considering that temporally unstable precursors of carbonate minerals form during the application of OAE, as indicated by 505 experiment **V** (Fig. 7), knowledge about the structure and behaviour of such unstable carbonate species formed is essential for discussing further the application scenarios of OAE. It is relevant to know the fraction and quality of formed unstable carbonate phases which might redissolve under given local and seasonal conditions, as well as application scenarios, because the question of a ΔTA_{net} loss or gain depend on it, and if a ΔTA_{net} loss is only transient for a given acceptable time. Understanding which 510 quality of particle surfaces, and surface area amounts per volume of water, trigger ΔTA_{net} -loss is further to investigate. It is known for a few particles, only. E.g., it is a common laboratory routine to ‘seed’ water with solid carbonates for the initiation 515 of carbonate precipitation (Wurgaft et al., 2021; Morse et al., 2003; DeBoer, 1977). The abundance of suitable surfaces allow carbonate formation and alkalinity loss at lower bulk water saturation levels than used to artificially precipitate carbonates from filtered seawater as shown by Wurgaft et al. (2021) and supported by results from Molnár et al. (2021), and experiment **III** (addition of precipitates from previous experiments). In addition, biotic processes may support carbonate formation at the 520 small scale, via photosynthesis, modulating the local carbonate system via uptake of inorganic carbon (Wolf-Gladrow and Riebesell, 1997). Experiment **II** indicate that ocean-based particles lead to carbonate formation at lower ΔTA_{added} levels compared to filtered water, despite that in this specific seawater only little particles were present.

Because triggered carbonate precipitation aids or boosts further precipitation in seawater, it is in the context of an OAE 525 application scenario essential to understand under which conditions alkalinity loss can be avoided, given the large variety of possible combinations of particles and biota in the world’s ocean. The continued loss of alkalinity well below critical values of $\Omega_{\text{aragonite}}$ once triggered was labelled ‘runaway precipitation’ by Moras et al. (2021). This aspect needs further understanding based on the few experiments available, as ΔTA_{net} -loss may stop under certain conditions and a possible regain of TA might happen (Fig. 7), which would be a relevant aspect of OAE-management.

Specifically, the question about the time window until an amorphous carbonate cluster can redissolve when mixed with 525 untreated seawater is essential for OAE treatment plans and management, considering that sustainable techniques for the application of OAE and monitoring are still missing. Essential global and regional data on stability of TA are still missing and need to be collected at large scale, if OAE should be a practical CDR technology, which is one day emerging from the method idea to a real-world application technology.

4.3 Consequences for application strategies

Model assessments on the global potential of OAE for long-term CO₂ removal do not consider the risks of alkalinity loss through increased carbonate precipitation (Burt et al., 2021; González and Ilyina, 2016; Ilyina et al., 2013; Kheshgi, 1995; Köhler et al., 2013).

535 Global modelling studies so far assumed very idealized conditions of OAE, e.g., a spatially and temporally homogenous increase in TA over years or decades. In reality, OAE will likely be achieved via point source release of solid or liquid TA, leading to spatially and temporally much stronger perturbations of the carbonate system, which may in turn trigger carbonate precipitation and $\Delta\text{TA}_{\text{net}}$ loss. This process might be further facilitated by the presence of particles in seawater, an aspect not considered in models so far.

540 Results from our study, as well as those from Moras et al. (2021) and Wurgaft et al. (2021) suggest that homogenous or heterogenous nucleation should be avoided to prevent $\Delta\text{TA}_{\text{net}}$ loss.

The loss of alkalinity in unfiltered water with elevated alkalinity in disequilibrium with the atmosphere after the addition of a solution without particles (Fig. 3, experiment **II**) starts at lower alkalinity additions than in filtered water. The water used in the experiments **I** to **III** is representative for oligotrophic ocean regions, which are low in particle abundance, but it cannot be 545 ruled out that few suspended sediment grains are affecting the results due the close distance to the coast. Wurgaft et al. (2021) showed that particles from river plumes can trigger alkalinity and DIC loss via carbonate precipitation at lower alkalinity levels than used here ($\sim 2,400 \mu\text{mol/kgw}$) (Figs. 1 and 2). This observation suggests that without further investigation, application of OAE in such areas should be avoided.

Caserini et al. (2021) modelled ship application of OAE simulating addition of a slurry of Ca(OH)₂. In their model results, pH 550 levels of 9.2 to 9.5 are reached in open water. Even if these high pH levels would be reached for only a short time (minutes to hours), results here suggest (Figs. 5 to 7) that ship OAE application procedures could result in critical saturation levels, triggering alkalinity loss (c.f. experiment **V** and Moras et al. (2021)). Experiment **VI**, however, showed that at the expense of high pH, application of high doses, exceeding the second threshold identified here, results in a $\Delta\text{TA}_{\text{net}}$ gain, but no loss. But, in that case not all added solid alkalinity is transferred into liquid TA in seawater (Fig. 8: efficiency of 78% after 24 hours for 555 the highest dose).

The addition of unequilibrated alkaline liquid from a ship would have to be in a way that the saturation state remains below critical thresholds at the site of release. The distribution of the alkaline liquid might be operated via large nets with a network of distributed pressure-nozzles causing small point turbulences for effective mixing of treated water with untreated. Slow point addition rates would increase the ship time needed to deliver a cumulative amount of alkalinity change to the ocean. This 560 would increase the cost, and, where fossil bunker fuel is used, reduce the overall effectiveness of OAE, if ship CO₂-emissions are not used to produce alkaline solutions added to the ocean. The rate of the ship-based TA-addition would likely be

constrained by the rate of CO₂ resupply to the treated seawater (in general the air-sea gas exchange), and the dilution rate of treated water with untreated.

To avoid that added solid particles act as seeds for carbonate precipitation, it may therefore be feasible to add engineered solid particles with sufficiently slow dissolution rate at the particle surface to prevent critical changes in seawater carbonate chemistry, while sink velocity is slow enough to allow for full dissolution close to the sea surface.

An alternative to open ocean addition is the use of reactors to produce equilibrated solutions for the addition into the sea (as shown by experiment I). Reactors for alkalinity production have been proposed for various purposes. For example, Kirchner et al. (2021) demonstrated on land that it is possible to produce alkaline solutions using limestone and seawater to scrub flue gases of a coal power plant. An alkalinity reactor at the industrial scale for counteracting water acidification in lakes after mining brown coal was built and operated in the Lausitz area, Germany (Koch and Mazur, 2016; LMBV, 2017). The pilot plant to this reactor was able to use solid CaO, Ca(OH)₂ or CaCO₃ and pure CO₂ for alkalinity production.

A further alternative is suggested by experiment I. Na₂CO₃ and NaHCO₃ dissolve quickly due to their high solubility in seawater. Results here (Figs. 1 and 3) show that the combination of Na₂CO₃ and NaHCO₃ to produce a targeted alkaline solution equilibrated with atmospheric conditions give the best outcome for a potentially sustainable alkalinity addition. The application of solid Na₂CO₃ was already suggested by Kheshgi (1995), but also discarded for global application due to limited natural resources.

It might therefore be worthwhile to study the production of Na₂CO₃ and NaHCO₃ from CO₂, NaCl and H₂O for OAE using solar thermal energy (Forster, 2014) or possibly as a product of electrochemical approaches (House et al., 2007; Rau et al., 2013). A review on NaHCO₃ production techniques showed that this topic is under-researched (Bonfim-Rocha et al., 2019), opening up the possibility for improvements in terms of cost and energy demand. In addition, new concepts for Na₂CO₃ production (Forster, 2012, 2014; Wu et al., 2019) provide energetically improved and environmentally friendly production schemes. Such improvements are relevant, in context of needed energy resources.

Wu et al. (2019) suggest an energy demand of 5.32 GJ per tonne Na₂CO₃, a decrease by 61% compared to standard Solvay process production. Using solar thermal energy for Na₂CO₃ (Forster, 2014) and NaHCO₃ (Bonfim-Rocha et al., 2019) has the advantage that production is not a burden to the electrical energy grid. Energy costs would be in the range of other discussed CDR approaches, like 4 to 12 GJ/tonne CO₂ for direct air capture (Shayegh et al., 2021; NASEM, 2022), or 3 – 6 GJ/tonne CO₂ for other methods of OAE (Renforth and Henderson, 2017). If the Na-carbonate solids were produced from NaCl solutions (e.g., through electrochemistry), methods for disposing of the waste HCl acid, or the evolved Cl₂ gas would need to be found(NASEM, 2022). However, HCl could also be a resource to other processes, like the extraction of needed elements for the global energy-transformation from rocks.

4.4 Consequences of alkalinity leakage and impacts of OAE on biota

595 Model studies indicate that adding alkalinity to the ocean could remove between 3 and 10 Gt of carbon dioxide per year from the atmosphere, while at the same time counteracting ocean acidification (Feng et al., 2017; Harvey, 2008). However, the potential impact of adding alkaline materials on marine organisms and ecosystems is still largely unknown. Most of the alkalinity enhancement experiments carried out to date have used calcium or sodium hydroxides as alkaline substances (D'Olivo and McCulloch, 2017; Lenton et al., 2018; Albright et al., 2016; Cripps et al., 2013), and have been tested on a small
600 number of calcifying organisms, like mollusks (Cripps et al., 2013; Waldbusser et al., 2014), corals (Comeau et al., 2012; Albright et al., 2016), and calcifying algae (Gore et al., 2018). In most cases, adding alkaline materials led to enhanced calcification in response to increased calcite and aragonite saturation states. The only in situ experiment in marine waters was carried out in a coral reef, leading to the restoration of calcification of corals that were affected by the decline in carbonate saturation state caused by acidification (Albright et al., 2016).

605 Other compounds (like iron, silica or heavy metals) occurring in alkaline rocks that could be added to the water might stimulate or inhibit organism growth, potentially benefiting some organism over others, thereby changing community structure. For instance, a shift towards diatoms and diazotrophic phytoplankton might occur if silica and iron-rich olivine is used as an alkaline agent. On the contrary, the use of alkaline solutions could benefit calcifying plankton, like coccolithophorids (Köhler et al., 2013; Bach et al., 2019), although diverse adaptations within this group may lead to different responses to OAE (Langer,
610 2009). Moreover, the addition of technical and natural mineral products may also release trace metals, like nickel in case of olivine dominated dunite (Montserrat et al., 2017).

Overall, the side effects of OAE on organisms, and more importantly on ecosystems, is largely unknown and deserves research at the experimental levels to provide a better knowledge in order to make informed decisions on whether or not alkalinity enhancement is a feasible mitigation strategy.

615 5 Conclusion

From the inorganic geochemical perspective, the amount of potentially formed carbonate phases, their stability (potential re-dissolution), and the subsequent loss of alkalinity after OAE application determines the sustainability of OAE. Understanding these processes and their management will be crucial for the decision-making process regarding OAE application and its subsequent potential for CO₂ sequestration.

620 For a given environmental setting, the risk of triggering the loss of alkalinity after OAE is determined by the carbonate saturation state, its temporal evolution and particle surface processes, with the possibility of being steered by the surface area per volume of water as well as the quality of such a surface. To avoid the loss of alkalinity and maximize alkalinity addition, the application of an alkaline solution in CO₂-equilibrium with the atmosphere and/or solutions with saturation levels that

625 avoid loss of alkalinity is favourable over the application of tested solid materials. Reactor solutions preparing alkaline solutions have been developed for other purposes, like counteracting lake acidification or scrubbing CO₂ from flue gas, and their design could be a blueprint for OAE-reactors.

Formation and redissolution of (temporally) instable carbonate phases are not well understood from the viewpoint of OAE management. This knowledge gap includes natural mixing processes of alkalinity-enhanced water with untreated water, therefore diluting potentially critical conditions in time before permanent secondary precipitation occurs. A pre-application 630 assessment as part of OAE-management, requires therefore detailed information on the hydrodynamics and advection of CO₂ into the water at the site of OAE application.

In addition, a broad spectrum of the effects of duration and degrees of oversaturation levels on permanent carbonate formation (Fig. 7) needs to be studied, including the effect of temperature affecting nucleation kinetics, which was not addressed here. It is likely that in colder waters than tested here, carbonate formation triggered by OAE is delayed via slower kinetics, offering 635 more time for dilution with untreated water. A public database with increasing information on tested materials and gained parameters for OAE application might help in the future to refine OAE assessments on potentials and risks. Such database should include knowledge on the ecosystem response to TA and pH changes, one aspect being understudied.

In conclusion, this study outlined some of the relevant aspects where knowledge on applicability of OAE must be refined before safe and sustainable application boundary conditions and management procedures for OAE can be established.

Data availability

Data will be made available on a publicly available repository upon final publication.

Author contributions

JHA, NS and JT designed the experiments. NS performed the experiments with partial help of JT, CL und JS. JHA wrote the

645 text with the help of all co-authors.

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgements

Peggy Bartsch (UHH) and Tom Jäppinen (UHH) are thanked for supporting the preparation and conduction of the experiments.

650 This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant
agreement No. 869357 (project OceanNETs, Ocean-based Negative Emission Technologies - analyzing the feasibility, risks,
and co-benefits of ocean-based negative emission technologies for stabilizing the climate) and by the Deutsche
Forschungsgemeinschaft (DFG, German Research Foundation) under Germany's Excellence Strategy – EXC 2037 'CLICCS
- Climate, Climatic Change, and Society' – Project Number: 390683824, contribution to the Center for Earth System Research
655 and Sustainability (CEN) of Universität Hamburg. This is a contribution to the BMBF-project CDRmare RETAKE-J
(03F0895J).

References

660 Albright, R., Caldeira, L., Hosfelt, J., Kwiatkowski, L., Maclare, J. K., Mason, B. M., Nebuchina, Y., Ninokawa, A., Pongratz, J., Ricke, K. L., Rivlin, T., Schneider, K., et al.: Reversal of ocean acidification enhances net coral reef calcification, *Nature*, 531, 362–365, doi: 10.1038/nature17155, 2016.

665 Bach, L. T., Gill, S. J., Rickaby, R. E. M., Gore, S., and Renforth, P.: CO₂ Removal With Enhanced Weathering and Ocean Alkalinity Enhancement: Potential Risks and Co-benefits for Marine Pelagic Ecosystems, *Frontiers in Climate*, 1, 1038, doi: 10.3389/fclim.2019.00007, 2019.

670 Bonfim-Rocha, L., Silva, A. B., Faria, S. H. B. d., Vieira, M. F., and Souza, M. d.: Production of Sodium Bicarbonate from CO₂ Reuse Processes: A Brief Review, *International Journal of Chemical Reactor Engineering*, 0, 1883, doi: 10.1515/ijcre-2018-0318, 2019.

Brečević, L. and Nielsen, A. E.: Solubility of amorphous calcium carbonate, *Journal of crystal growth*, 98(3), 504-510, doi: 10.1016/0022-0248(89)90168-1, 1989.

675 Burt, D. J., Fröb, F., and Ilyina, T.: The Sensitivity of the Marine Carbonate System to Regional Ocean Alkalinity Enhancement, *Frontiers in Climate*, 3, 21, doi: 10.3389/fclim.2021.624075, 2021.

Caserini, S., Pagano, D., Campo, F., Abbà, A., De Marco, S., Righi, D., Renforth, P., and Grosso, M.: Potential of Maritime Transport for Ocean Liming and Atmospheric CO₂ Removal, *Frontiers in Climate*, 3, doi: 10.3389/fclim.2021.575900, 2021.

Clarkson, J. R., Price, T. J., and Adams, C. J.: Role of metastable phases in the spontaneous precipitation of calcium carbonate, *Journal of the Chemical Society, Faraday Transactions*, 88(2), 243-249., doi: 10.1039/FT9928800243, 1992.

680 Comeau, S., Alliouane, S., and Gattuso, J. P.: Effects of ocean acidification on overwintering juvenile Arctic pteropods *Limacina helicina*, *Marine Ecology Progress Series*, 456, 279-284, doi: 10.3354/meps09696, 2012.

Cripps, G., Widdicombe, S., Spicer, J. I., and Findlay, H. S.: Biological impacts of enhanced alkalinity in *Carcinus maenas*, *Marine pollution bulletin*, 71, 190–198, doi: 10.1016/j.marpolbul.2013.03.015, 2013.

D'Olivo, J. P. and McCulloch, M. T.: Response of coral calcification and calcifying fluid composition to thermally induced bleaching stress, *Sci Rep*, 7, 2207, doi: 10.1038/s41598-017-02306-x, 2017.

685 DeBoer, R. B.: Influence of seed crystals on the precipitation of calcite and aragonite, *American Journal of Science*, 277(1), 38, doi: 10.2475/ajs.277.1.38, 1977.

Dickson, A. G.: Standard potential of the reaction: AgCl(s) + 1/2H₂(g) = Ag(s) + HCl(aq), and the standard acidity constant of the ion HSO₄⁻ in synthetic sea water from 273.15 to 318.15 K, *Chem. Thermodynamics* 22, 113-127, doi: doi:10.1016/0021-9614(90)90074-z, 1990.

690 Dickson, A. G. and Riley, J. P.: The estimation of acid dissociation constants in seawater media from potentiometric titrations with strong base. I. The ionic product of water — Kw, *Marine Chemistry*, 7, 89-99, doi: 10.1016/0304-4203(79)90001-X, 1979.

Fakhraee, M., Li, Z., Planavsky, N., and Reinhard, C.: Environmental impacts and carbon capture potential of ocean alkalinity enhancement (preprint), doi: 10.21203/rs.3.rs-1475007/v1, 2022.

695 Feng, E. Y., Koeve, W., Keller, D. P., and Oschlies, A.: Model-Based Assessment of the CO₂ Sequestration Potential of Coastal Ocean Alkalization, *Earth's Future*, 5, 1252-1266, doi: 10.1002/2017ef000659, 2017.

Forster, M.: Investigations for the environmentally friendly production of Na₂CO₃ and HCl from exhaust CO₂, NaCl and H₂O, *Journal of Cleaner Production*, 23, 195–208, doi: 10.1016/j.jclepro.2011.10.012, 2012.

700 Forster, M.: Investigations to convert CO₂, NaCl and H₂O into Na₂CO₃ and HCl by thermal solar energy with high solar efficiency, *Journal of CO₂ Utilization*, 7, 11–18, doi: 10.1016/j.jcou.2014.06.001, 2014.

Friedlingstein, P., Jones, M. W., O'Sullivan, M., Andrew, R. M., Bakker, D. C. E., Hauck, J., Le Quéré, C., Peters, G. P., Peters, W., Pongratz, J., Sitch, S., Canadell, J. G., et al.: Global Carbon Budget 2021, doi: 10.5194/essd-2021-386, 2021.

González, M. F. and Ilyina, T.: Impacts of artificial ocean alkalization on the carbon cycle and climate in Earth system simulations, *Geophysical Research Letters*, 43, 6493–6502, doi: 10.1002/2016gl068576, 2016.

705 Gore, S., Renforth, P., and Perkins, R.: The potential environmental response to increasing ocean alkalinity for negative emissions, *Mitigation and Adaptation Strategies for Global Change*, 24, 1191-1211, doi: 10.1007/s11027-018-9830-z, 2018.

Harvey, L. D. D.: Mitigating the atmospheric CO₂ increase and ocean acidification by adding limestone powder to upwelling regions, *Journal of Geophysical Research*, 113, doi: 10.1029/2007jc004373, 2008.

House, K. Z., House, C. H., Schrag, D. P., and Aziz, M. J.: Electrochemical acceleration of chemical weathering as an energetically feasible approach to mitigating anthropogenic climate change, *Environmental Science & Technology*, 41(24), 8464-8470., doi: 10.1021/es0701816, 2007.

Ilyina, T., Six, K. D., Segschneider, J., Maier-Reimer, E., Li, H., and Núñez-Riboni, I.: Global ocean biogeochemistry model HAMOCC: Model architecture and performance as component of the MPI-Earth system model in different CMIP5 experimental realizations, *Journal of Advances in Modeling Earth Systems*, 5, 287–315, doi: 10.1029/2012ms000178, 2013.

710 IPCC: Summary for Policymakers. In: *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, 2021.

715 Jones, D. C., Ito, T., Takano, Y., and Hsu, W.-C.: Spatial and seasonal variability of the air-sea equilibration timescale of carbon dioxide, *Global Biogeochemical Cycles*, 28, 1163-1178, doi: 10.1002/2014gb004813, 2014.

Kheshgi, H. S.: Sequestering atmospheric carbon dioxide by increasing ocean alkalinity, *Energy*, 20(9), 915-922., doi: 10.1016/0360-5442(95)00035-F 1995.

Kirchner, J. S., Lettmann, K. A., Schnetger, B., Wolff, J.-O., and Brumsack, H.-J.: Identifying Appropriate Locations for the Accelerated Weathering of Limestone to Reduce CO₂ Emissions, *Minerals*, 11, 1261, doi: 10.3390/min11111261, 2021.

Koch, C. B. and Mazur, K.: A new technology of pit lake treatment using calcium oxide and carbon dioxide to increase alkalinity, 2016.

Köhler, P., Abrams, J. F., Völker, C., Hauck, J., and Wolf-Gladrow, D. A.: Geoengineering impact of open ocean dissolution of olivine on atmospheric CO₂, surface ocean pH and marine biology, *Environmental Research Letters*, 8(1), 014009., doi: 10.1088/1748-9326/8/1/014009, 2013.

Koishi, A.: Carbonate mineral nucleation pathways, Doctoral dissertation, 194 pp., 2017.

Langer, G., G. Nehrke, I. Probert, J. Ly, and P. Ziveri: Strain-Specific Responses of *Emiliana huxleyi* to Changing Seawater Carbonate Chemistry, *Biogeosciences*, 6, 2637-2646, doi: 10.5194/bg-6-2637-2009, 2009.

Lenton, A., Matear, R. J., Keller, D. P., Scott, V., and Vaughan, N. E.: Assessing carbon dioxide removal through global and regional ocean alkalization under high and low emission pathways, *Earth System Dynamics*, 9, 339-357, doi: 10.5194/esd-9-339-2018, 2018.

LMBV: In-lake Neutralization of East German Lignite Pit Lakes: Technical History and New Approaches from LMBV, 2017.

Lueker, T. J., Dickson, A. G., and Keeling, C. D.: Ocean pCO₂ calculated from dissolved inorganic carbon, alkalinity, and equations for K₁ and K₂: validation based on laboratory measurements of CO₂ in gas and seawater at equilibrium, *Marine chemistry*, 70(1-3), 105-119, doi: 10.1016/S0304-4203(00)00022-0, 2000.

Mergelsberg, S. T., Yoreo, J. J. d., Miller, Q. R. S., Marc Michel, F., Ulrich, R. N., and Dove, P. M.: Metastable solubility and local structure of amorphous calcium carbonate (ACC), *Geochimica et Cosmochimica Acta*, 289, 196-206, doi: 10.1016/j.gca.2020.06.030, 2020.

Molnár, Z., Pekker, P., Dódony, I., and Pósfai, M.: Clay minerals affect calcium (magnesium) carbonate precipitation and aging, *Earth and Planetary Science Letters*, 567, 116971, doi: 10.1016/j.epsl.2021.116971, 2021.

Montserrat, F., Renforth, P., Hartmann, J., Leermakers, M., Knops, P., and Meysman, F. J.: Olivine Dissolution in Seawater: Implications for CO₂ Sequestration through Enhanced Weathering in Coastal Environments, *Environ Sci Technol*, 51, 3960-3972, doi: 10.1021/acs.est.6b05942, 2017.

Moras, C. A., Bach, L. T., Cyronak, T., Joannes-Boyau, R., and Schulz, K. G.: Ocean Alkalinity Enhancement – Avoiding runaway CaCO₃ precipitation during quick and hydrated lime dissolution, 31, doi: 10.5194/bg-2021-330, 2021.

Morse, J. W. and He, S.: Influences of T, S and PCO₂ on the pseudo-homogeneous precipitation of CaCO₃ from seawater: implications for whiting formation, *Marine Chemistry*, 41(4), 291-297., doi: 10.1016/0304-4203(93)90261-L, 1993.

Morse, J. W., Gledhill, D. K., and Millero, F. J.: CaCO₃ precipitation kinetics in waters from the great Bahama bank, *Geochimica et Cosmochimica Acta*, 67, 2819-2826, doi: 10.1016/s0016-7037(03)00103-0, 2003.

NASEM: A Research Strategy for Ocean-based Carbon Dioxide Removal and Sequestration, National Academies of Sciences, Engineering, and Medicine, Washington (DC), 10.17226/26278, 2022.

Orr, J. C., Epitalon, J.-M., Dickson, A. G., and Gattuso, J.-P.: Routine uncertainty propagation for the marine carbon dioxide system, *Marine Chemistry*, 207, 84-107, doi: 10.1016/j.marchem.2018.10.006, 2018.

Pierrot, D., Lewis, E., and Wallace, D. W. R.: MS Excel Program Developed for CO₂ System Calculations ORNL/CDIAC-105a (Co2sys_v2.5) [code], 10.3334/CDIAC/otg.CO2SYS_XLS_CDIAC105a, 2006.

Rau, G. H., Carroll, S. A., Bourcier, W. L., Singleton, M. J., Smith, M. M., and Aines, R. D.: Direct electrolytic dissolution of silicate minerals for air CO₂ mitigation and carbon-negative H₂ production, *Proc Natl Acad Sci U S A*, 110, 10095-10100, doi: 10.1073/pnas.1222358110, 2013.

Renforth, P. and Henderson, G.: Assessing ocean alkalinity for carbon sequestration, *Reviews of Geophysics*, 55, 636-674, doi: 10.1002/2016rg000533, 2017.

Rodriguez-Blanco, J. D., Sand, K. K., and Benning, L. G.: ACC and vaterite as intermediates in the solution-based crystallization of CaCO₃, 2017.

Sear, R. P.: Nucleation: theory and applications to protein solutions and colloidal suspensions, *Journal of Physics: Condensed Matter*, 19(3), 033101., doi: 10.1088/0953-8984/19/3/033101, 2007.

Shayegh, S., Bosetti, V., and Tavoni, M.: Future Prospects of Direct Air Capture Technologies: Insights From an Expert Elicitation Survey, *Frontiers in Climate*, 3, doi: 10.3389/fclim.2021.630893, 2021.

Sun, W., Jayaraman, S., Chen, W., Persson, K. A., and Ceder, G.: Nucleation of metastable aragonite CaCO₃ in seawater, *Proc Natl Acad Sci U S A*, 112, 3199-3204, doi: 10.1073/pnas.1423898112, 2015.

UNFCCC: Report of the Conference of the Parties to the United Nations Framework Convention on Climate Change (21st Session, 2015: Paris). Retrieved December. Vol. 4. 2015., 2015.

Uppström, L. R.: The boron/chlorinity ratio of deep-sea water from the Pacific Ocean, *Deep-Sea Research*, 21, 161-162, doi: 10.1016/0011-7471(74)90074-6, 1974.

Waldbusser, G. G., Hales, B., Langdon, C. J., Haley, B. A., Schrader, P., Brunner, E. L., Gray, M. W., Miller, C. A., and Gimenez, I.: Saturation-state sensitivity of marine bivalve larvae to ocean acidification, *Nature Climate Change*, 5, 273-280, doi: 10.1038/nclimate2479, 2014.

770 Wolf-Gladrow, D. and Riebesell, U.: Diffusion and reactions in the vicinity of plankton: a refined model for inorganic carbon transport, *Marine Chemistry*, 59(1-2), 17-34, doi: 10.1016/S0304-4203(97)00069-8, 1997.

Wu, Y., Xie, H., Liu, T., Wang, Y., Wang, F., Gao, X., and Liang, B.: Soda Ash Production with Low Energy Consumption Using Proton Cycled Membrane Electrolysis, *Industrial & Engineering Chemistry Research*, 58, 3450–3458, doi: 10.1021/acs.iecr.8b05371, 2019.

775 Wurgaft, E., Wang, Z. A., Churchill, J. H., Dellapenna, T., Song, S., Du, J., Ringham, M. C., Rivlin, T., and Lazar, B.: Particle Triggered Reactions as an Important Mechanism of Alkalinity and Inorganic Carbon Removal in River Plumes, *Geophysical Research Letters*, 48, 277, doi: 10.1029/2021gl093178, 2021.