

Continuous ground monitoring of vegetation optical depth and water content with GPS signals

Vincent Humphrey^{1,2}, Christian Frankenberg^{1,3}

Correspondence to: Vincent Humphrey (vincent.humphrey@geo.uzh.ch or

5 vincent.humphrey@bluewin.ch)

¹Division of Geological and Planetary Sciences, California Institute of Technology, Pasadena

²Department of Geography, University of Zürich, Zürich, Switzerland

³Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA, United States

Abstract. Satellite microwave remote sensing techniques can be used to monitor vegetation optical depth (VOD), a metric which is directly linked to vegetation biomass and water content. However, these large-scale measurements are still difficult to reference against either rare or not directly comparable field observations. So far, in-situ estimates of canopy biomass or water status often rely on infrequent and time-consuming destructive samples, which are not necessarily representative of the canopy scale. Here, we present a simple technique based on Global Navigation Satellite Systems (GNSS) with the potential to bridge this persisting scale gap. Because GNSS microwave signals are attenuated and scattered by vegetation and liquid water, placing a GNSS sensor under a vegetated canopy and measuring changes in signal strength over time can provide continuous information on VOD, and thus on vegetation biomass and water content. We test this technique at a forested site in Southern California for a period of 8 months. We show that variations in GNSS signal to noise ratios reflect the overall distribution of biomass density in the canopy and can be monitored continuously. For the first time, we show that this technique can resolve diurnal variations in VOD and canopy water content at hourly to sub-hourly time steps. Using a model of canopy transmissivity to assess these diurnal signals, we find that temperature effects on the vegetation dielectric constant, and thus on VOD, may be non-negligible at the diurnal scale or during extreme events like heatwaves. Sensitivity to rainfall and dew deposition events also suggests that canopy water interception can be monitored with this approach. The technique presented here has the potential to resolve two important knowledge gaps, namely the lack of ground truth observations for satellite-based VOD, as well as the need of a reliable proxy to extrapolate isolated and labour-intensive in-situ

a supprimé: samplings

a supprimé: quality

a supprimé: The

measurements of biomass, canopy water content, or leaf water potential. We provide recommendations for deploying such off-the-shelf and easy-to-use systems at existing ecohydrological monitoring networks such as FluxNet or SapfluxNet.

a supprimé: radar

1. Introduction

35 Complementary to observations in the visible and near-infrared spectrum, microwave-based remote sensing of the vegetation can be used to obtain information on aboveground biomass and vegetation water content (Konings et al., 2019; Frappart et al., 2020). Such information is essential to improve our understanding of how ecosystems respond and adapt to both natural and anthropogenic changes, including for instance droughts, deforestation, or global warming. However, while satellite products can provide a
40 global picture, their algorithms also need to be calibrated and evaluated against other reference measurements, thus raising the need for ground truth observations. In the case of vegetation optical depth (VOD), which is one of the main microwave observables for vegetation, a network of continuously gathered ground truth data does not exist yet (Li et al., 2021). In this introduction, we provide a quick introduction to microwave observations, highlight current applications of VOD, and review recent
45 attempts to compare satellite VOD against other data. We then present a ground-based technique relying on Global Navigation Satellite Systems (GNSS) with the objective to address the lack of ground-based VOD observations.

a supprimé: direct

a supprimé: arguably

a supprimé: currently

Microwave remote sensing methods are broadly categorized as either passive or active. Passive
50 instruments (like radiometers) measure the amount of microwave radiation that is naturally emitted by the Earth, whereas active instruments (like radars) transmit a specific radio signal and measure the properties of the backscattered (reflected) signal. In both cases, the measured signals (brightness temperature or backscatter) depend on various factors, but in particular on the emissivity/reflectivity of the surface, and the transmissivity (γ) of the vegetation, which acts as a layer of temporally changing
55 opacity between the ground and the atmosphere. The transmissivity of vegetation is typically controlled by factors influencing both its dielectric constant (e.g. vegetation water content and temperature) and its structure (density, shape, size, and distribution of the vegetation elements in the canopy). The vegetation

a supprimé: either

a supprimé: or

optical depth (VOD) is a single parameter condensing all these different contributions and, in combination
65 with the incidence angle (θ), is used to express the canopy transmissivity as a function of the incidence
angle:

$$\gamma = e^{\frac{-VOD}{\cos \theta}} \quad (1)$$

70 This formulation of the transmissivity is the expression of a Beer-Lambert's law, where VOD represents
an attenuation coefficient (specific to the observation wavelength and polarization) and the term $1/\cos \theta$
accounts for the path length through the canopy, as VOD (as defined here) only relates to the vertical
path. Higher VOD values indicate that the canopy is less transparent to electromagnetic waves,

a supprimé: microwaves

75 It is worth noting that this definition of VOD is mainly inherited from the perspective of microwave
remote sensing algorithms, where VOD has to be estimated in order to obtain other variables of interest
such as soil moisture (Jackson et al., 1982; Jackson and Schmugge, 1991; Owe et al., 2008). Because both
field campaigns and theoretical considerations showed that in-situ estimates of VOD can be related to
vegetation water content and biomass (Ulaby and Jedlicka, 1984; Schmugge and Jackson, 1992; Paloscia
80 and Pampaloni, 1992), this sparked interest in the development of more robust and long-term estimates
of satellite-based VOD. Global maps of VOD have since become available from numerous satellite
microwave sensors (Moesinger et al., 2020; Chaubell et al., 2020) but can hardly be validated, as
systematic ground-based VOD observations do not exist at the moment. Only a few studies have managed
to compare satellite-based VOD against in situ observations. Most notably, Tian et al. (2016) have found
85 a good agreement between satellite-based VOD and in situ measurements of green biomass in African
Sahel. Instead, the majority of studies assessing or using satellite-based VOD have relied on comparisons
with other remotely sensed variables (e.g. Grant et al., 2016) or model-data fusion products. For instance,
Rodríguez-Fernández et al. (2018) have compared VOD from the SMOS satellite against optical
vegetation indices, lidar tree height and different aboveground biomass benchmark maps. Consistent with
90 other studies, their results show that VOD is often a better proxy for tree height and biomass, compared
to optical greenness indices (such as NDVI or EVI). Thus, VOD has been increasingly used to monitor

changes in aboveground biomass and terrestrial carbon sequestration at the inter-annual and seasonal time scales (Brandt et al., 2018;Wigneron et al., 2020;Fan et al., 2019).

95

In addition to providing information on long-term biomass changes, VOD has also been shown to exhibit significant short-term variability, which is thought to be related to changes in relative vegetation water content (Feldman et al., 2021). Using observations from the AMSR-E satellite, Konings and Gentine (2016) found significant variations between midnight and midday VOD which may put an invaluable constrain on plant response to water stress at the ecosystem-scale (Lee et al., 2013;Konings et al., 2021). Further studies also highlighted intercepted water (due to either rainfall or dew) as a potential factor explaining diurnal variations in VOD (Xu et al., 2021). Using a ground-based radiometer, Holtzman et al. (2021) showed that VOD variations over the course of a day could be linearly related to in-situ measurements of leaf water potential. This is consistent with a previous study by Momen et al. (2017) which found good agreement between satellite-based VOD and leaf water potential measurements across three different U.S. sites. Measurements with active microwave sensors have also shown that radar backscatter exhibits diurnal variations which can be related to both dew and relative water content (Vermunt et al., 2021;Konings et al., 2017b).

110 Considering some advantages of microwave-range compared to visible-range observations¹, such studies have demonstrated the interest of VOD for monitoring vegetation dynamics from space (Konings et al., 2021). However, they have also revealed our limited ability to (1) validate space-borne VOD observations and (2) disentangle the multitude of factors which may affect them across a wide range of ecosystems and climatic conditions. Established eco-hydrological measurement networks (e.g. FluxNet or SapFluxNet) can provide most of the necessary collocated observations in terms of meteorological parameters, water fluxes, canopy structure, and biomass (e.g. Momen et al., 2017), but only few of these

¹ Microwave remote sensing has two key interesting properties, first it is relatively independent of cloud cover and solar illumination conditions, second it is not only sensitive to the surface of the observed material but also to its content, up to a certain penetration depth. Drawbacks include a lower energy and longer wavelength, which usually translates into coarser spatial and/or radiometric resolutions, and some difficulty in disentangling the many different factors contributing to the measured signal (i.e. the ground versus the vegetation contributions, the surface roughness, the material's temperature, and its moisture content).

a supprimé: signal

a supprimé: for passive microwave remote sensing

sites have ever been equipped with microwave radiometers or active radars, and if so, usually for limited periods of time. Yet, continuous in-situ VOD observations at these sites could serve as a particularly useful indirect proxy to interpolate and gap-fill the sparse and labour-intensive measurements of biomass and leaf water status. There is thus a need for a cheap and robust method to obtain ground-based VOD measurements over a wide variety of already monitored sites.

Here, we propose to use microwave signals from existing Global Navigation Satellite Systems (GNSS) to monitor the transmissivity and VOD of a vegetation canopy. The experimental setup consists in a pair of GNSS receivers, one placed on a tripod below a forest canopy, and one located above the canopy with an unobstructed view of the sky (Fig. 1). Here, canopy is understood as the portion of vegetation lying above the sensor (in our case, this excludes the forest floor and ground vegetation). The main idea is that the difference in measured signal strength between the two instruments will yield information on the opacity of the canopy. Fortunately, many survey-grade GNSS receivers available on the market can be configured to log signal strengths, making it relatively easy to implement such a system. The GNSS microwave signals fall in the L-band (1-2 GHz), similar to frequencies used by the SMOS and SMAP satellites for calculating VOD. Nowadays, four major GNSS constellations (GPS, GLONASS, Galileo, and BeiDou) represent about a hundred of orbiting satellites, such that about 20 to 40 satellites may be visible and individually tracked from the ground at any given time and from any location in the world. Set-ups similar to the one shown in Fig. 1 have been tested before, for instance Rodriguez-Alvarez et al. (2012) used it to estimate the canopy water content of a walnut tree stand and Camps et al. (2020) used it to estimate VOD in a beech forest and make comparisons with optical indices. Kurum and Farhad (2021) also tested it with mobile GNSS antennas and Zribi et al. (2017) used it to monitor sunflower canopies. Over the last decades, GNSS-based monitoring of the Earth's surface has been demonstrated in a wide variety of domains ranging from oceanography to hydrology. While we rely here on the attenuation of the direct GNSS signal through the canopy, it is worth noting that other GNSS-based techniques, such as GNSS reflectometry, have been used to monitor soil moisture, snow height, vegetation water content, and biomass (Larson et al., 2009; Small et al., 2010; Chew et al., 2014; Egido et al., 2014; Larson, 2016; Chew and Small, 2018; Ruf et al., 2018; Santi et al., 2019; Carreno-Luengo et al., 2020; Guerriero et al., 2020; Pan

145 et al., 2020; Munoz-Martin et al., 2022). GNSS reflectometry relies on GNSS signals that are reflected from the Earth's surface and which are weaker than the direct GNSS signals analysed here.

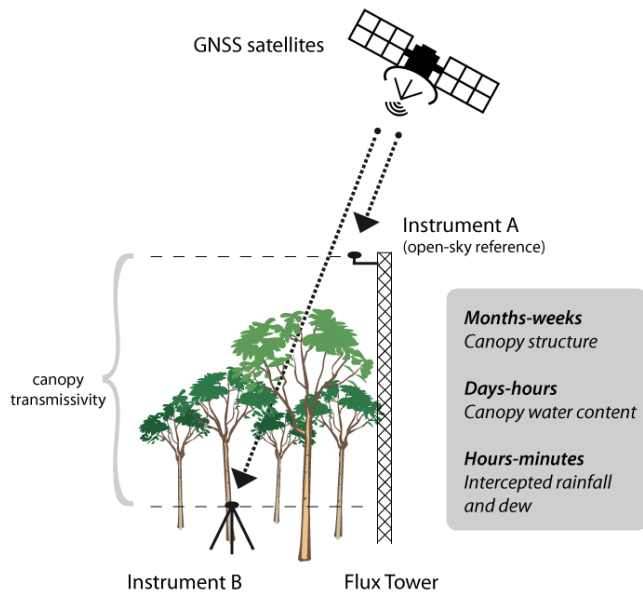


Figure 1. Instrument setup for measuring GNSS-based VOD. Each instrument consists of an antenna and a GNSS receiver.

150 The goal of this study is to demonstrate the potential of ground-based GNSS receivers for monitoring VOD, dry aboveground biomass, and water content continuously. In Section 2, we describe the measurements conducted at the study site and outline a simple canopy transmissivity model which is later used to estimate canopy density and water content from VOD measurements. Section 3 presents the raw GNSS measurements and the processing approach used to transform these into a canopy-averaged VOD
 155 time series. Section 4 compares the obtained seasonal and diurnal VOD time series against other in-situ and satellite measurements. Section 5 provides an example of retrieval algorithm for aboveground

biomass and canopy water content. Finally, section 6 summarizes the main conclusions and provides some recommendations with respect to future deployments at existing ecohydrological sites.

2. Data and methods

160 2.1 Site set up

The experiment consists of a reference site which has an unobstructed view of the sky, and a forested site which is located under a semi-closed forest canopy (Fig. 1). The open-sky reference site is located on the roof of a building of the California Institute of Technology in Pasadena, California (34.13624°, -118.12693°), and the forested site is located in the Huntington Library botanical garden, some 1.7 km

165 away (34.12404° -118.11582°). The forested site is non-irrigated, with trees of about 5 to 15m height.

Tree species surrounding the antenna are mainly Coast Live Oaks (*quercus agrifolia* Née) and the understory is herbaceous. The overall climate is Mediterranean with weather conditions usually clear, daily maximum temperatures between 25°C and 35°C, and low relative humidity. At each site a Septentrio PolARx5e GNSS receiver, connected to a PolaNt-x MF (RHCP) GNSS antenna, measured multi-
170 constellation (GPS, GLONASS, Galileo, BeiDou) GNSS signals over the period of May 13 to December 10, 2020, with a logging rate of 15 seconds. Power loss at the site from June 15th to July 1st caused a data gap of 17 days. The raw GNSS data was quality-checked using the 'teqc' pre-processing software, publicly available at the UNAVCO website (www.unavco.org/software). The satellites' azimuth and elevation angles are also computed with teqc. Weather data is measured at the reference site by a station
175 of the Total Carbon Column Observing Network (<http://tcon-weather.caltech.edu/>). Weather data acquisition was interrupted from July 15th to 26th. Rainfall was measured with a tipping-bucket at the DPW HQ station (5km from the forested site) by the Department of Public Works of the City of Los Angeles (<https://dpw.lacounty.gov/wrd/rainfall/>).

2.2 Leaf water content

180 Forty-eight leaf samples were collected from two live oaks closest to the GNSS antenna on October 18, 2020, at 7am, 12pm and 5pm using a 2m long pruner. For each tree we equally sampled the same three different parts of the crown. Unless otherwise stated below, we followed the protocol advised in Mullan

a supprimé: l

a supprimé: o

a supprimé: L

and Pietragalla (2012). Leaves were weighed on-site immediately after being sampled (fresh weight; FW) and stored **individually** in cooled glass vials. They were then transported to the lab where about 1 cm of water was added to each vial to cover the leaves' petioles. Turgid weight (TW) was measured after 12 hours **in a refrigerator (and in darkness)**. Then, the leaves were dried at 80°C for a period of 24 hours, after which dry weight (DW) was measured. Relative leaf water content (RLWC, in percent) is calculated as.

$$RLWC = \frac{FW-DW}{TW-DW} \cdot 100 \quad (2)$$

We also calculate the gravimetric moisture content of the leaf (m_g , in g g^{-1}), a variable that is later used to model the leaf dielectric constant.

$$m_g = \frac{FW-DW}{FW} \quad (3)$$

2.3 Canopy transmissivity model

We use a **dielectric mixing** model of the canopy transmissivity to investigate the potential roles of canopy volumetric density, water content, and temperature on the GNSS-based VOD measurements. We use a relatively simple formulation which only considers the attenuating effect of the canopy on the direct signal power and represents the canopy as a homogeneous layer, assumed to consist of randomly distributed elements (Ulaby and Jedlicka, 1984; Ulaby and Long, 2014; Guglielmetti et al., 2007). The transmissivity of the canopy is expressed as a function of a bulk canopy extinction coefficient (κ_e), canopy height (h , in meters), and the incidence angle.

$$\gamma = e^{\frac{-2 \kappa_e h}{\cos \theta}} \quad (4)$$

We define a fixed average canopy height of 7 meters based on field observations. Neglecting scattering, the extinction coefficient is related to the complex index of refraction of the canopy layer (n_c'') (Ulaby and Long, 2014).

$$\kappa_e = \frac{2\pi}{\lambda_0} n_c'' \quad (5)$$

a supprimé: physical

where λ_0 is the free-space wavelength (in meters). Note that this formulation and the overall concept of bulk coefficients is applicable only when the inclusions in the canopy (i.e. the pockets of water within the vegetation tissues) are smaller in size compared to the observation wavelength (here $\lambda_0 \approx 19$ cm for the GPS L1 frequency), so that scattering effects are small enough to be neglected (also see Jackson and Schmugge, 1991; Ulaby and Long, 2014). **While this may be true for leaves, this assumption may not hold for larger elements such as branches and trunks. However, using a more complex** theoretical scattering model, Guerriero et al. (2020) **showed** that the right-hand circular polarized (RHCP) GNSS signals measured below a forest canopy are dominated by coherent attenuation whereas only the left-hand circular polarized signals (which **most geodetic ground-based** GNSS antennas **are** designed to reject) are dominated by volume scattering. The complex index of refraction is calculated from the dielectric constant of the canopy layer (ϵ_c) (Ulaby and Long, 2014).

$$n_c'' = -\Im\{\sqrt{\epsilon_c}\} \quad (6)$$

The canopy is constituted of two main phases; the surrounding air, which makes up most of the canopy volume, and the vegetation material. The dielectric of the canopy ϵ_c is calculated using a two-phase refractive mixing approach (Ulaby and Long, 2014, Eq. 4.45).

$$\sqrt{\epsilon_c} = v_{veg} \sqrt{\epsilon_{veg}} + (1 - v_{veg}) \sqrt{\epsilon_{air}} \quad (7)$$

where v_{veg} represents **the vegetation volumetric density, a parameter that may vary as a function of the growth cycle and is defined as** the volume fraction of **the vegetation material** within the canopy (on the order of 0.0001-0.01 m³/m³). **This parameter is not to be confused with other measures of vegetation density like crown volume (i.e. including empty space) per m² for instance.** The term $(1 - v_{veg}) \sqrt{\epsilon_{air}}$ is practically equal to 1 with no imaginary part such that Eq. 7 can be rewritten as (Ulaby and Long, 2014, Eq. 11.89).

$$n_c'' \approx -\Im\{\sqrt{\epsilon_{veg}}\} v_{veg} \quad (8)$$

The dielectric of the vegetation (ϵ_{veg}) incorporates a real and an imaginary part, namely the dielectric permittivity and the dielectric loss ($\epsilon_{veg} = \epsilon'_{veg} - i\epsilon''_{veg}$). Both depend on various factors, but most importantly on the considered wavelength, the vegetation water content, as well as the plant water's temperature and ionic conductivity. Here we model ϵ_{veg} using the semi-empirical model for vegetation

a supprimé: U

a supprimé: also confirmed

a supprimé: are

a supprimé: and is to be seen as a vegetation density parameter that may vary as a function of the growth cycle

a mis en forme : Exosant

introduced by Ulaby and El-rayes (1987) and valid over the range 0.2-20 GHz. This model is derived
245 from an observational dataset of corn leaves, and has been successfully used for a wide range of species,
including trees (e.g. Chuah et al., 1995). The model expresses the dielectric of the vegetation ϵ_{veg} as a
function of its gravimetric moisture (m_g), its temperature, and its salinity. The numerous equations are
not reported here but can be found for instance in Ulaby and El-rayes (1987), Ulaby and Long (2014).
The purpose of the transmissivity and dielectric models described above is to provide a simple estimate
250 of the potential effects of canopy density, temperature and water content changes on canopy
transmissivity. It is important to note that this simple formulation neglects several aspects, including
volume scattering, which may be important in configurations with denser biomass (and also when
interpreting RHCP backscatter or LHCP signals). In Fig. 2, we illustrate the modelled VOD response (at
the GPS L1 1.575 GHz frequency) to potential changes in vegetation water content, temperature, and
255 vegetation volumetric density. As expected, an increase in vegetation moisture content (Fig. 2a) leads to
a substantial increase of the vegetation's dielectric permittivity and dielectric loss, which results in a lower
canopy transmissivity. Temperature influences the vegetation's dielectric properties as well, although less
markedly (Fig. 2b). The ionic conductivity of the plant water is the main factor explaining the slight
dependency of the loss factor (and of VOD) to the temperature. Finally, vegetation volumetric density
260 within the canopy is also a parameter that strongly controls the transmissivity (Fig. 2c). Note that the
shape of these response curves (the response to temperature in particular) may change depending on the
considered frequency.

a supprimé: , or Steele-Dunne et al. (2012).

a supprimé: first-order

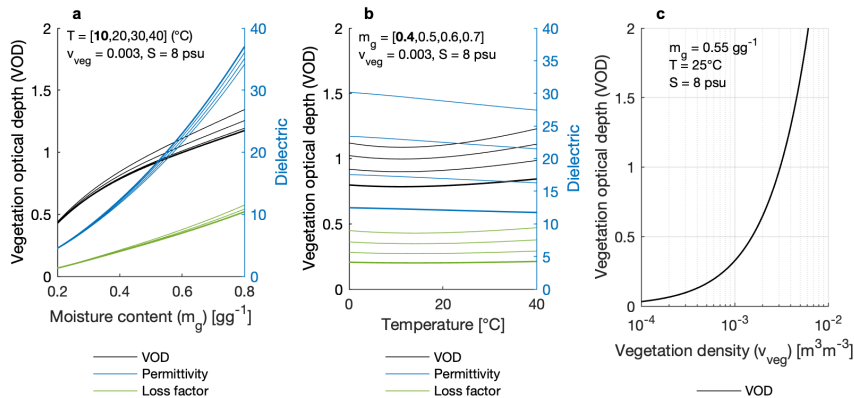


Figure 2. **Modelled VOD** at the GPS L1 frequency (1.575 GHz). a-b) modelled responses of canopy VOD and the vegetation material's dielectric properties to changes in gravimetric moisture content and temperature. The bold lines in (a) are obtained assuming a temperature of 10°C, with thin lines indicating 10°C increments. The bold lines in (b) are obtained assuming a gravimetric moisture content of 0.4 gg⁻¹, with thin lines indicating 0.1 gg⁻¹ increments. c) modelled response of canopy VOD to **vegetation volumetric** density. Canopy height is fixed at 7 meters and salinity to 8‰.

a supprimé: Canopy

a supprimé: transmissivity

a supprimé: canopy

3. GNSS data processing

3.1 Raw SNR observations

Most survey-grade GNSS receivers commonly register signal-to-noise ratios (SNR, in decibel) which express the magnitude of the received signal power from each satellite compared to the background noise (Bilich et al., 2007). The hemispherical plot in Fig. 3a illustrates the SNR values measured over the course of one single day at the reference (open-sky) station for just one satellite of the GPS constellation (PRN2). GNSS satellites are commonly identified by their pseudorandom code (PRN) which allows the receiver to determine which satellite is being tracked, such that its azimuth and elevation can be calculated. Individual satellite tracks repeat after a period that depends on the GNSS constellation (e.g. twice per sidereal day (23h56) for GPS and every 10 sidereal days for Galileo). As is very commonly observed, the SNR increases as the satellite rises up above the horizon (12PM mark), reaches its peak value at maximum elevation (2PM mark), where the antenna gain is the strongest, and decreases again until the satellite disappears from view (5PM mark). As can be seen from Fig. 3b, the same satellite track observed from

a supprimé: a

a supprimé: .

a supprimé:

290 the forested site shows numerous drops in SNR. Assuming a comparable level of background noise at the
two sites, the SNR difference between the two sites (ΔSNR , Eq. 9) reflects, for the most part, the
transmissivity of the canopy, expressed in decibels. As expected, it is mostly negative (Fig 1c-d),
indicating attenuation by the forest canopy.

a supprimé: 2

a supprimé: mainly

295
$$\Delta SNR = SNR_{Forested} - SNR_{OpenSky} \quad (9)$$

Combining all available data (May to December 2021) from 102 individual GNSS satellites, we produce
a hemispherical map of the average ΔSNR (Fig. 4a), which matches the overall distribution of canopy
density as seen from the antenna location (Fig. 4b). Note that absolute SNR values vary from spacecraft
to spacecraft, as those have different (and occasionally time-varying) transmit powers. It is thus very
important to first pair the individual SNR measurements taken by the two receivers and only then, average
any ΔSNR values.

a supprimé:


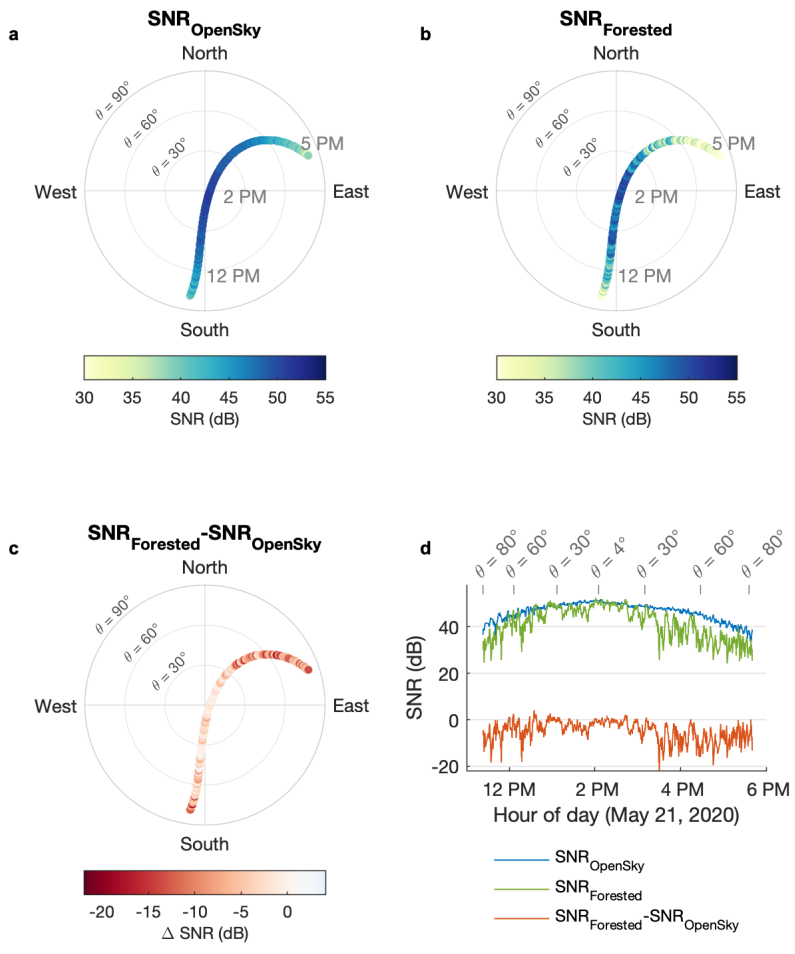


Figure 3. Sky plots illustrating the SNR observations on May 21, 2020 for one specific GPS satellite (PRN2) at the open sky site (a) and the forested site (b). (c) Difference in SNR between the two sites. (d) Same as a-c but showing the temporal evolution of the SNR. The centre of the polar plots corresponds to the local zenith.

310

It should be noted that while the SNR measurement is dominated by the contribution of the direct (line of sight) signal, it also includes a comparatively weaker contribution from [volume scattering and indirect ground](#) multipath reflections (Bilich et al., 2007; Smyrniotis et al., 2013), [the latter of](#) which may contain information on soil water status for instance (Larson, 2016). Multipath often manifests itself as a periodic
315 oscillation of the SNR which is caused by the successively constructive and destructive interference from ground reflections, as a function the satellite's elevation angle. Such periodic oscillations, of a few dB, are barely visible for instance in Fig. 3d at the beginning and the end of the SNR_{OpenSky} time series (blue curve), where the roof's floor acts as the reflector. However, while present in our data, multipath represents a signal that is about one order of magnitude smaller than the attenuations caused by the
320 presence of trees in the line of sight. It is only in some favourable situations (i.e. flat grasslands, open water bodies, ...), where large flat surfaces surrounding the antenna produce a coherent structure in ground reflections, that multipath is strong enough to be reliably detected in SNR, even though [our](#) GNSS systems are explicitly designed to reject such signals. Indeed, most geodetic-grade antennas have metal ground planes and are much less sensitive to the predominantly left hand circular polarized (LHCP)
325 ground reflections of the transmitted right hand circular polarized (RHCP) signal ([note that in contrast, spaceborne GNSS reflectometry also relies on the LHCP signal](#)). Thus, in our case, the difference in SNR between the two sites is predominantly due to the attenuation of the direct RHCP signal by the forest canopy and it is reasonable to assume that multipath effects are of second order. This is also confirmed by a ΔSNR close to zero in the sky sectors where the canopy is either absent or very sparse (Fig. 4). It is
330 only when the incidence angle is larger than 80° that the majority of the reflected GNSS signal is co-polarized (RHCP) (Smyrniotis et al., 2013). As a precaution, we discard all observations with an incidence angle higher than 80° for the remainder of the analysis.

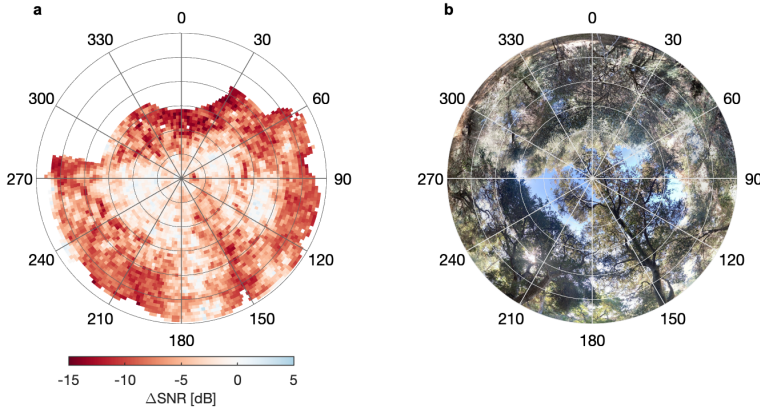

335 Figure 4. (a) Sky plot illustrating the mean SNR difference between the open sky and the forested site for L1/L1C signals ($n = 2.17 \cdot 10^7$ observations, taken over an 8-month period). The mean value within each 2-degree equal area sky sector is shown. Some sky sectors in (a) are obstructed by buildings at the reference site and are thus excluded from the analysis (towards the north-west and north-east). (b) Hemispherical photograph taken from the perspective of the forested site antenna.

3.2 Transmissivity and vegetation optical depth

After conversion from decibel to linear scale (Eq. 10), the ΔSNR measurements are used as the transmissivity estimate, and VOD is calculated from Eq. 11 (Eq. 1). Note that in our case, this represents L-band VOD at RHCP polarization.

$$\gamma = 10^{\frac{\Delta SNR}{10}} \quad (10)$$

$$VOD = -\ln(\gamma) \cos \theta \quad (11)$$

345 The resulting hemispherical distribution of long-term mean transmissivity and VOD is reported in Fig. 5a-b. In some cases, the instantaneous transmissivity values computed from the raw GNSS measurements were higher than 1, leading to a VOD lower than zero, which is unphysical (about 8% of all measurements). This occurs because individual SNR measurements unavoidably include some random noise as well as non-random multipath interferences that can cause the measured signal power at the reference site to be transiently lower than at the forested site. This especially occurs where there are gaps in the canopy and both antennas have a clear line of sight to the satellite. To preserve the error structure of the measurements, we propose to still use these unphysical values when computing temporal (i.e. daily

a supprimé: whenever possible, and especially

355

360

or hourly) averages later in the paper, so that positive and negative errors can cancel out, avoiding a potential bias in our estimate of the average VOD (Fig. 5b). While transmissivity has an obvious dependence on the incidence angle (Fig. 5c), this is not the case for VOD (Fig. 5d), as would be expected from Eq. 1. The strong anisotropy of the long-term VOD pattern (Fig. 5b) reflects the heterogeneous structure of the canopy (Fig. 4b), with local mean VOD values ranging from 0.16 to 2.46 (1st and 99th percentiles) depending on the azimuth and incidence angle. The whole canopy average VOD is 0.79, which is similar to what is reported for evergreen broadleaf forests at L-band (Konings et al., 2017a).

a supprimé: random

a supprimé: long-term

a supprimé: a credible value for

a supprimé:

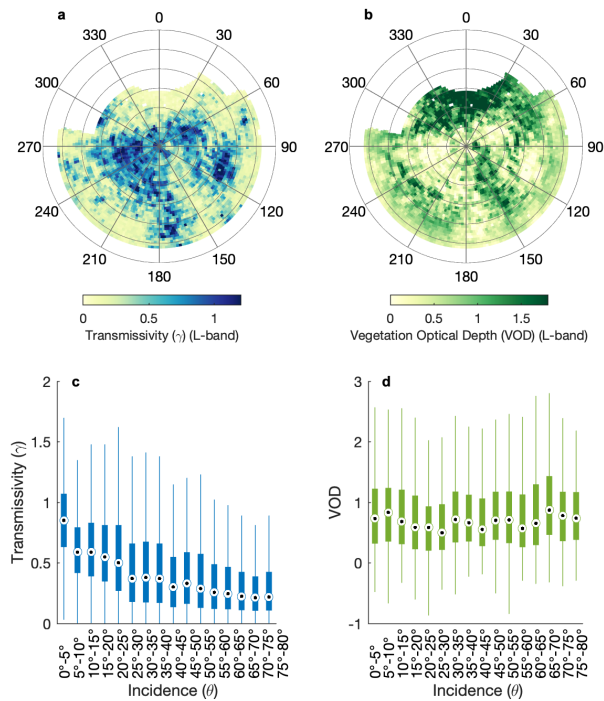


Figure 5. Sky plot illustrating the mean canopy transmissivity (a) and mean VOD (b). The mean value within each 2-degree equal area sky sector is shown. (c-d) The box plots show the distribution (5th, 25th, 50th, 75th and 99th percentiles) of all individual transmissivity and VOD measurements ($n = 2.17 \cdot 10^7$) as a function of the incidence angle (relative to zenith).

3.3 Computation of VOD time series

370 Because changes in VOD over time may provide valuable information on the vegetation's growth cycle and water content, it is of great interest to investigate its temporal evolution. However, this is complicated by the patterns of GNSS orbits, which change continuously. In Fig. 6a, we provide an overview of the most frequent orbit patterns over our site and their mean revisit time, showing which sky sectors are most often observed. While it takes about a day on average to cover most of the observable sky sectors (Fig. 375 6b, red curve), monitoring one specific section of the canopy every 1 or 2 hours would only be possible over a narrow band where many satellite tracks coincide (Fig. 6a). Note that the location of the highly sampled band (and the blind spot above it) depends on the site's latitude (it is closer to zenith at higher latitudes) and would be located on the opposite side in the Southern hemisphere. In practice, this means that a continuous (gap-free) and robust VOD time series can only be obtained by aggregating data collected at different azimuth and elevation angles (i.e. trading angular resolution for temporal coverage). 380 However, as different cross-sections within Fig. 5b are observed each day, the changing and irregular sampling of the canopy introduces spurious variability in daily site-averaged VOD. When calculating sub-daily (e.g. hourly) time series, this problem is even more important and will obfuscate most of the potential real variability. For example, binning the raw GNSS-based VOD observations into hourly 385 averages produces a rather noisy time series with just seasonal trends visible (Fig. 7a-b, 'VOD raw'). This is because a lot of the variability in 'VOD raw' is caused by the fact that different areas of a heterogenous canopy are observed every hour. This issue can also be diagnosed quantitatively. For instance, computing the serial autocorrelation² of the raw VOD time series (Fig. 7c) reveals periodicities likely not related to ecophysiological processes but instead caused by the combined repeat times of the different GNSS 390 constellations.

a supprimé: anomaly

a supprimé: A

a mis en forme : Anglais (E.U.)


a mis en forme : Anglais (E.U.)

a mis en forme : Anglais (E.U.)

a mis en forme : Anglais (E.U.)

a mis en forme : Anglais (E.U.)

² The serial autocorrelation is calculated using the time series shown in Fig. 7a-b and is defined here as the Pearson correlation coefficient between the time series at time t and $t-l$, where l is the lag.

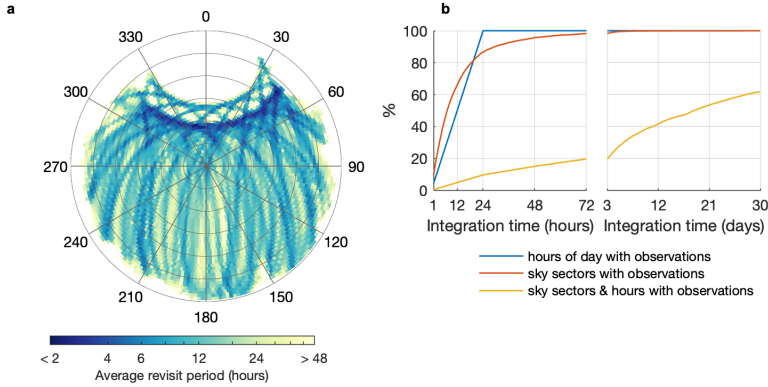

395 Figure 6. (a) Sky plot illustrating the mean revisit time (average number of hours until the next overpass within a given sky sector). This includes the GPS, GLONASS, Galileo, and BeiDou constellations. (b) Average sampling statistics as a function of data integration time. For instance, 84% of all observable sky sectors are observed at least once after 24 hours of continuous measurements (red curve). After 30 days of continuous measurement, 62% of all observable sky sectors and hours of the day have been observed at least once (yellow curve).

400 Here, we propose to address this sampling problem by subtracting from each individual VOD observation the long-term average (similar to what is shown in Fig. 5b) taken at the same azimuth and incidence angle.

The goal is to subtract the angular heterogeneity in VOD, representing the uneven canopy distribution, and only retain residuals from the locally averaged attenuation (Eq. 12). The long-term average at a given incidence angle and azimuth (Eq. 13) is calculated inside a neighbourhood N that includes all measurements within some chosen angular distance δ from that point of interest (Eq. 14).

$$405 \quad VOD_{\varphi_i, \theta_i, t_i}^{residual} = VOD_{\varphi_i, \theta_i, t_i} - VOD_{\varphi_i, \theta_i}^{mean} \quad (12)$$

$$VOD_{\varphi_i, \theta_i}^{mean} = \frac{1}{n} \sum_{j=1}^n (VOD_{\varphi_j \in N_i, \theta_j \in N_i}) \quad (13)$$

$$N_i: \quad \text{hav}(\lambda_i - \lambda_j) + \cos(\lambda_i) \cos(\lambda_j) \text{hav}(\varphi_i - \varphi_j) < \text{hav}(\delta) \quad (14)$$

410 where the terms φ_i , λ_i , and t_i represent the azimuth, elevation, and time step of the point of interest (for angles expressed in degrees, $\lambda = 90 - \theta$). Equation 14 is the condition that determines if measurements belong to the neighbourhood around the point of interest 'i'. The left term in Eq. 14 is the formula for the


- a supprimé: remove
- a supprimé: static part of
- a supprimé: anomalies
- a supprimé: any
- a supprimé: given point of interest

- a supprimé: 2

haversine of the angle between any two points on a sphere. The right term is the haversine of a chosen
420 angle δ which defines the extent of the neighbourhood.

An adequate value for δ may be selected based on the autocorrelation of the VOD observations with
respect to the angular distance (Supplementary Fig. 1). This suggest that there is a high consistency of the
VOD estimates up to an angular distance of about 0.5 to 1°. Supplementary Fig. 1 also provides some
425 indication of the repeatability of the measurements when taken at an interval of several days. As can be
expected, observations separated by a longer temporal interval are in lower agreement. The selection of
 δ is ultimately a compromise between obtaining an accurate long-term VOD average while still retaining
enough observations within the neighbourhood. In our case, we found that $\delta = 0.5^\circ$ seems to be an
adequate value. To avoid excessive computations, we calculate $VOD_{\varphi_i, \theta_i}^{mean}$ at each node of a fine
430 hemispherical grid with a spacing of 0.1° . The $VOD_{\varphi_i, \theta_i}^{mean}$ value closest to each individual $VOD_{\varphi_i, \theta_i, t_i}$ is
then used in Eq. 12. Binning the calculated VOD anomalies into hourly averages, we produce a processed
time series of the average VOD (Fig. 7, ‘VOD processed’). To preserve the original absolute level of
VOD, the average $VOD_{\varphi_i, \theta_i}^{mean}$ (across all φ and θ) is added back to the residual time series (otherwise the
‘VOD processed’ time series would be centred around zero). The serial autocorrelation of that processed
435 time series (Fig. 7d) is now dominated by a more credible 24-hour cycle.

a supprimé: anomaly

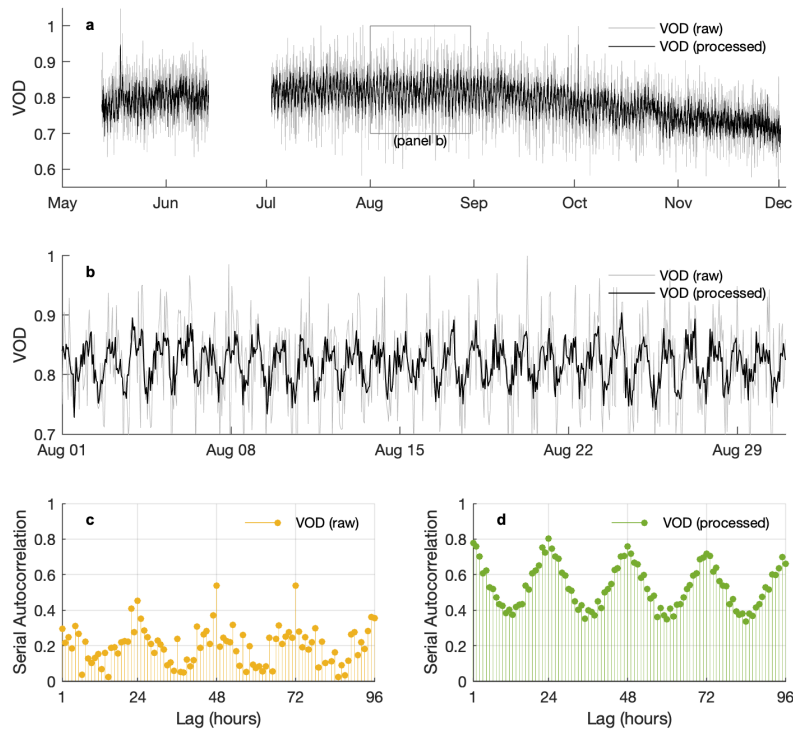

440 **Figure 7.** (a) Hourly time series of VOD before and after reducing the impact of irregular sampling caused by the GNSS orbit patterns. (b) Zoom on August, showing sub-daily variability in VOD. (c-d) Serial autocorrelation of the raw and processed VOD time series.


4. GNSS-based vegetation optical depth

4.1 Seasonal changes

445 In Fig. 8, we compare processed daily VOD averages against other observations. Using quality-checked [30-meter](#) satellite images from Sentinel 2 (Claverie et al., 2018), we calculate the enhanced vegetation index (EVI) (Liu and Huete, 1995) at our site (Fig. 8a). EVI is a commonly used vegetation index and an

20

overall proxy for vegetation greenness, health, and photosynthetic activity. Generally, we find that the temporal evolution of VOD appears to lag behind that of EVI by about 2 months. This is consistent with previous findings over drylands by Tian et al. (2016) who found a temporal shift (increasing as a function of forest density) between satellite-based VOD and vegetation greenness. They suggest that this may be explained by the longer growing season and later peak time of woody plants compared to the herbaceous understory. Similar lags between peak NDVI and peak VOD have been observed in other regions of the world from satellite data (Wang et al., 2020; Tian et al., 2018). The peak EVI in June coincides with the maximum in available solar energy (Fig. 8b), and with an increase in VOD which could suggest a build-up of biomass in the canopy. This is followed by a slow decline in EVI which does not occur in VOD until the end of August. The gradual decline in vegetation activity and health over the summer is typical of the region, and mainly a response to the overall increase in water stress resulting from warmer temperatures, drier atmosphere, and low soil moisture after months with no rainfall. The 2020 summer culminated with a record-breaking heatwave on September 6 (Fig. 8c), followed by a steady decline in VOD during fall season where some minor shedding of leaves could be observed at the site.

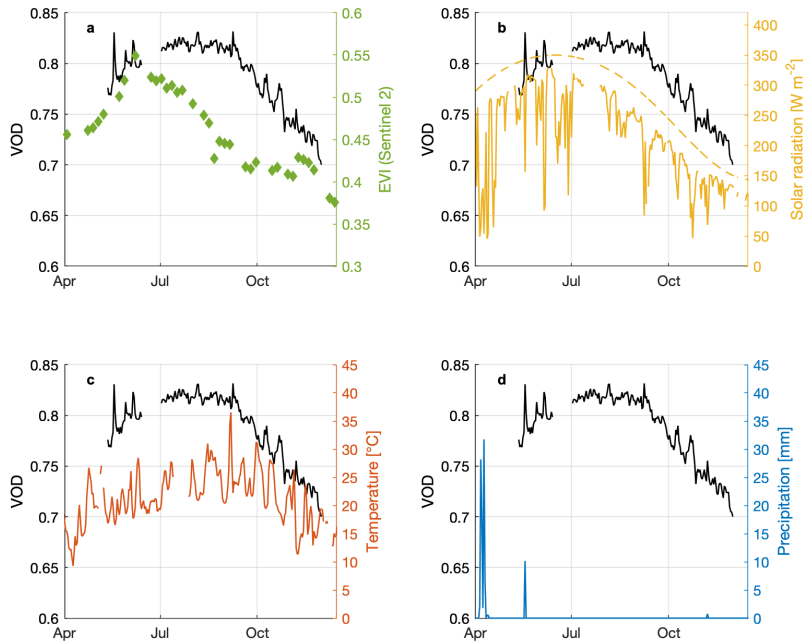

460

Figure 8. Daily time series of GNSS-based VOD compared against (a) Enhanced Vegetation Index calculated from harmonized Sentinel 2 images (HLS v1.4, 30 meter resolution, <https://hls.gsfc.nasa.gov/>), (b) Solar and potential solar radiation observed at the reference site, (c) Air temperature observed at the reference site, and (d) precipitation totals measured at the closest rain gauge station.

465 4.2 Diurnal cycle

Even though processed hourly VOD time series contain a certain amount of noise (e.g. Fig. 7b), they also show a relatively strong 24-hour cycle (Fig. 7d). One way of obtaining a more robust and precise estimate of that diurnal cycle is to calculate the average diurnal cycle from data aggregated over a long period of time, for instance several days or even a whole month. This is what is done in Fig. 9a. The average diurnal cycle of VOD is consistent with what would be expected from the perspective of plant physiology and its response to water stress over the course of a typical day. VOD culminates in the early hours of the morning, at around 5 to 6 AM, indicating a relatively “water-rich” canopy, because leaves and stems have

470

been replenished with water overnight, and likely also due to the occasional presence of dew in the canopy. This peak is followed by a gradual drop after sunrise (at about 6AM), concurrent with the onset of photosynthesis and transpiration, as well as an increase in vapour pressure deficit (i.e. an increase in atmospheric water demand). As a result, dew quickly evaporates and the vegetation starts losing more water through transpiration, thus depleting canopy water content. Around noon, some equilibrium is reached between plant water losses and plant water supply so that VOD becomes relatively stable. In the evening, plant rehydration causes VOD to rise back.

A minor peak in VOD is observed at around 3pm, but remains difficult to explain without further evidence. That peak might indicate a brief period of canopy rehydration, documented for instance in Douglas firs (Cermak et al., 2007, their Figure 6), resulting from midday stomatal closure (Xiao et al., 2021). The associated “midday depression” of transpiration and photosynthetic rates has been widely documented (e.g. Faria et al., 1996;Kamakura et al., 2011). However, theory (Fig. 2b) also predicts that VOD could slightly increase in response to higher canopy temperature, which would peak at about that time of the day. In Section 5.2, we present an attempt to disentangle these two possible contributions.

Overall, our results agree with previous observations of a diurnal cycle in VOD and backscatter (e.g. Konings et al., 2017b;Holtzman et al., 2021;Vermunt et al., 2021;Prigent et al., 2022). Such diurnal VOD changes are consistent with our knowledge of canopy water storage dynamics, as derived from either continuous direct measurements (Zhou et al., 2018), or from the imbalance between plant water losses (i.e. transpiration) and plant water supply (i.e. measured with sap flow sensors) (Kocher et al., 2013;Cermak et al., 2007). The leaf samples collected on the site in October also confirm that some intraday variability exists in relative leaf water content (Fig. 9b). Monitoring the diurnal cycle of plant water status is interesting because it can provide key information on plant hydraulic traits (Konings and Gentine, 2016) and enables disentangling the effects of limitations in root water uptake, plant transpiration, and water redistribution within the plant (Konings et al., 2021). In Fig. 9c, we investigate whether our method would be able to monitor such physiologically-relevant changes, and in particular here, seasonal changes in pre-dawn versus midday water status. We find midday VOD to be almost always lower than pre-dawn VOD, a behaviour that is entirely consistent with field observations of pre-dawn and midday leaf water

a mis en forme : Anglais (E.U.)

a mis en forme : Anglais (E.U.)

potentials (Martínez-Vilalta et al., 2014). Seasonally, both pre-dawn and midday VOD start to decrease in September with the start of a very dry period during which VPD remains high even during the night. Pre-dawn and midday VOD are significantly correlated with each other ($r = 0.79$), as is frequently observed with leaf water potential, however, we note that this might also occur (at least partly) because

505 VOD is sensitive not only to relative changes in water content but also to potential seasonal changes in the absolute amount of biomass present in the canopy (Momen et al., 2017). These mixed contributions from both absolute biomass and its relative water content are even better illustrated in Fig. 9d, where we find that the amplitude of the diurnal cycle in VOD becomes larger as denser sections of the canopy are considered.

510

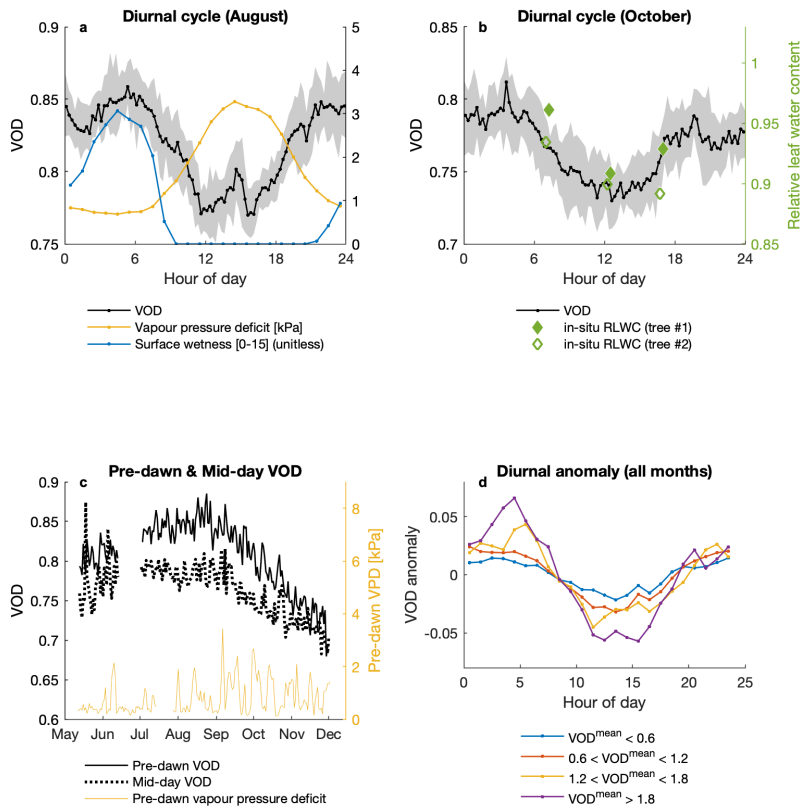


Figure 9. (a) Average diurnal cycle for the month of August. Average VOD (black) is shown at a 15-minute sampling rate with shaded areas delineating the 25th and 75th percentiles. VPD and surface wetness data from the TCCON weather station have hourly resolution. (b) Average diurnal cycle for the month of October compared with in-situ measurements of relative leaf water content. (c) Daily pre-dawn and midday VOD, calculated using all observations within the window 4AM-6AM and 12PM-2PM respectively. (d) Diurnal VOD anomaly (centred around zero) measured for progressively denser classes of canopy (based on the long-term VOD average, see Fig. 5b).

515

5. Retrieval of canopy density and water content

5.1 Approach and algorithm

520 In the following, we demonstrate an approach to retrieve changes in canopy density and water content at hourly resolution based on the transmissivity model presented in section 2.3. Combining Eq. 1, 4, 5, and 8 we obtain the following expression for modelled VOD :

$$VOD_t = 2k_e h = 2 \frac{2\pi}{\lambda_0} [-\Im\{\sqrt{\varepsilon_{veg_t}}\}] v_{veg_t} h \quad (15)$$

525 Canopy height h is 7 meters, and λ_0 is the free-space wavelength. This leaves as free parameters: v_{veg_t} , the time-dependent vegetation volumetric density (in m^3/m^3), and ε_{veg_t} , the time-dependent bulk dielectric constant of the vegetation, which is itself a function of the (measured) temperature, (unknown) water content (m_g) and (unknown) salinity of the plant water (Ulaby and El-rayes, 1987). A similar expression may be found for instance in Kerr and Wigneron (1995) or Guglielmetti et al. (2007).

530 Here, we use the canopy-averaged processed VOD time series (i.e., Fig. 7b) as the observed VOD. This means that canopy density and water content are assumed to evolve homogeneously over the whole canopy. If the forest canopy is very heterogeneous, this might not be a suitable approximation. For instance, some groups of trees may evolve at different speeds, or individual trees may exhibit different responses to water stress. If this is suspected, a retrieval may be performed for each individual tree, potentially at the cost of retrieval accuracy since less observations will be available. In practice, this would

535 mean separating the field of view of the antenna into sub sectors (for instance based on data similar to Fig. 4) and computing a processed VOD time series for each sub sector. However, and for the sake of simplicity, this is not done here, and we perform only one retrieval for the whole canopy. Disentangling the effects of changes in overall biomass density (v_{veg}) versus variations of its water content (m_g) is one of the main challenges when trying to interpret and better understand VOD (Momen et al., 2017; Konings et al., 2019). Because changes in biomass tend to unfold at a much slower pace than changes in relative water content, a common strategy has been to assume that long-term changes in VOD are mostly related to biomass, while short-term changes (and especially a diurnal signal) are most likely due to variations in water content (e.g. Konings et al., 2016). In the retrieval detailed below, we will make use of this assumption and allow v_{veg} to contain only low-frequency (long-term) changes. We also

a supprimé: volume

a supprimé: of the canopy

assume that the temperature of the canopy can be approximated by the air temperature. While leaf and air temperatures are not necessarily equal, as documented by many field studies, an error of a few degrees is negligible for the purpose of calculating ϵ_{veg} (Fig. 2b) and our main purpose is only to gain a reasonable
550 representation of the seasonal and diurnal effects of temperature on the dielectric constant. We also note that these temperature impacts on the dielectric are often neglected in other studies.

Finally, the plant water salinity is also unknown in our case, but most likely within a range of about 1 to 11 psu according to previous experience (Ulaby and Long, 2014). In the absence of any other data, we assume that salinity is constant over the whole time period. In our retrieval algorithm, a range of a priori
555 values for vegetation water salinity is tested and the value yielding the best overall (season) fit to the observed VOD data is selected as the most plausible. We note that salinity, in the context of the dielectric model of Ulaby and El-royes (1987), is meant to account for the ionic conductivity of the plant water (due to both sugars and salts). Thus, the salinity yielding the best fit might not necessarily reflect the actual (NaCl) salinity of the plant water.

560 Below, we summarize the retrieval algorithm step by step. The root mean square error between modelled and observed VOD is always used as the cost function and optimization at steps #2 and #4 is carried with a simplex search method. We define the search space for m_g , the gravimetric moisture content (water mass / fresh mass), as [0.3, 0.7]. This is guided by the average values measured at the site ($m_g = 0.45 \pm 0.02 \text{ g g}^{-1}$), and also by data from Scoffoni et al. (2014) for *quercus agrifolia* in the Los Angeles area
565 ($m_g = 0.48 \text{ g g}^{-1}$). The search space for v_{veg} (volume of vegetation material per m^3) is loosely defined as [0.0001, 0.01 $\text{m}^3 \text{ m}^{-3}$] based on the indications of Ulaby and Long (2014).


a supprimé: of canopy

Algorithm

1. Select an a priori value for salinity.
- 570 2. For each 24-hour period, optimize v_{veg} (1 value for the entire 24-hour period) together with m_g (24 hourly values). The result is a time series of daily k and hourly m_g covering the whole season (Fig. 10a).

3. Filter the time series of v_{veg} with a low-pass filter. Here we use a local regression filter (LOESS) with ± 30 days width (Fig. 10a).
575
4. Optimize m_g using the new v_{veg} values obtained at step #3 (Fig. 10b).
5. Filter the time series of m_g to reduce the high-frequency noise. Here we use a LOESS filter with ± 2 hours width (Fig. 10b).
6. Evaluate the agreement between the modelled and observed canopy-averaged VOD time series (with v_{veg} and m_g from steps #3 and #5) and determine an optimal salinity (Fig. 10c).
580

Because v_{veg} is kept constant only for the duration of a day, there is some high-frequency variability in the v_{veg} time series that is obtained after step #2 (Fig. 10a). These sudden and unrealistic jumps of v_{veg} also contaminate the estimates of m_g (not shown). These problems are alleviated in step #3, where daily estimates of v_{veg} are low-pass filtered, consistent with the assumption that changes in biomass usually occur at a relatively slow pace. A new hourly time series of m_g is then obtained based on the filtered v_{veg} time series in step #4 (Fig. 10b). Because the m_g time series is contaminated by some noise inherited from the VOD observations, some mild smoothing is applied to m_g in step #5 (Fig. 10b). Steps #2 to #5 are repeated for different values of salinity and we retain the optimum of the cost function as the most likely value (Fig. 10c). Here we find an optimum with a salinity of 8.9 psu, which is a physically plausible value.
590

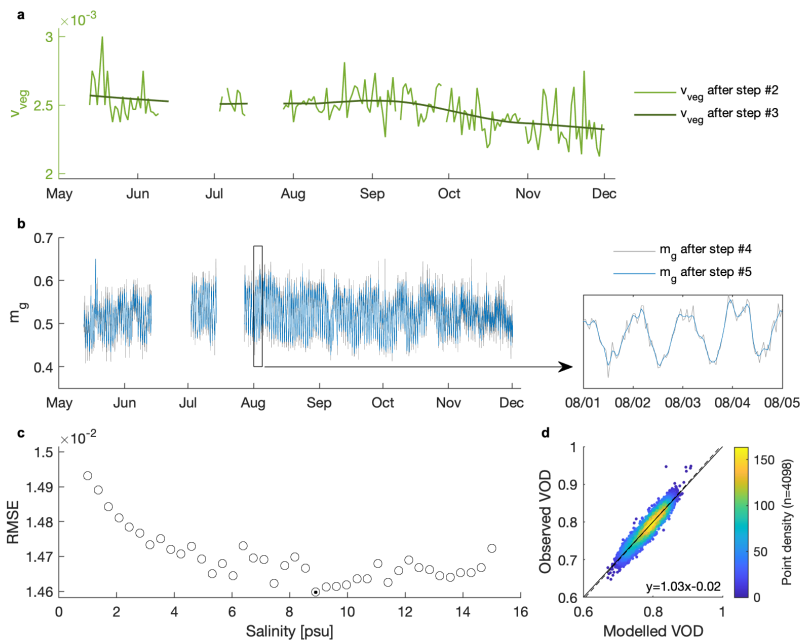

595 **Figure 10. (a) Time series of v_{veg} after steps #2 and #3. (b) Time series of m_g after steps #4 and #5 with a zoom on a short period for better visibility. (c) Root mean squared error obtained for various salinity values. (d) Scatter plot of the modelled versus observed VOD. The data shown in (a), (b) and (d) is based on a salinity of 8.9 psu.**

Before we interpret these results, some limitations to the presented approach need to be emphasized. First, the dielectric model of Ulaby and El-rayes (1987) was originally developed for leaves, however, it is clear that branches and stems may also contribute to canopy extinction. To our advantage however, Kurum et al. (2009a) have determined with numerical simulations (at L-band) that leaves have a significant impact on extinction, while branches have a dominant contribution only in terms of backscatter, and trunks have a negligible impact on extinction. Steele-Dunne et al. (2012) arrived at similar conclusions and concluded that leaf moisture is by far the dominant control on vegetation transmissivity at L-band (for both

605 polarizations). Observations by Mätzler (1994) in a deciduous forest also showed a clear dependence of
the transmissivity to the presence or absence of leaves in the canopy. It is assumed that the dielectric
model of leaves and its sensitivity to moisture, temperature, and salinity provides a sufficient
approximation for the behaviour of the whole crown (branches and stems included). However, the impact
of intercepted water (due to dew deposition or rainfall) is not explicitly represented and will thus be
compensated for by an overestimation of the retrieved gravimetric moisture content. There is
620 unfortunately not enough empirical data in our case to also retrieve intercepted water independently.

a supprimé: Thus, we

a supprimé: good

5.2 Results and interpretation

In Fig. 11a, the retrieval of gravimetric moisture content (m_g) is compared against observations of leaves
taken at the site on October 18. There is a bias of 0.04 g g^{-1} between the retrieval and the observations, a
surprisingly good performance given the assumptions made during the retrieval of m_g , and the fact that
615 a few leaf samples are not necessarily representative of the entire canopy. The relative difference between
dawn and daytime values (about 0.03 g g^{-1}) is consistent between the retrieval and the observations. We
also find that the relationship between retrieved hourly m_g and VPD becomes narrower (Fig. 11b)
compared to the relationship between hourly VOD and VPD (Fig. 11c). Even though this does not provide
any formal validation of the m_g retrieval, it does suggest that the retrieval is somewhat successful in
620 concentrating in m_g a response to atmospheric water demand that is consistent with observed plant
stomatal behaviour (e.g. Grossiord et al., 2020).

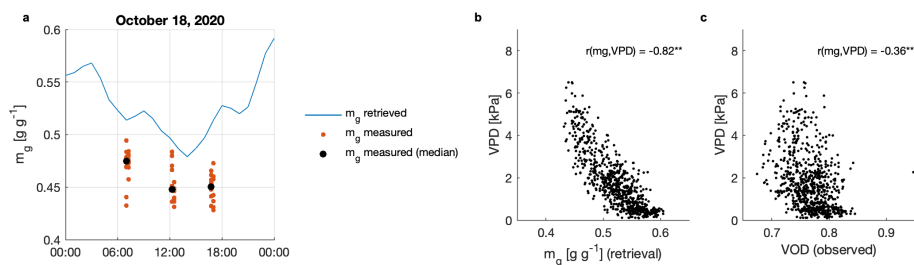


Figure 11. Retrieved and measured values of gravimetric moisture content (m_g) on October 18 (a). Scatter plots of the hourly values of m_g (b) and VOD (c) against vapour pressure deficit (VPD), for the month of October (both correlations significant at $p < 0.01$).

630 Dry aboveground biomass (AGB, kg m^{-2}) can be calculated by multiplying the retrieved volume of the vegetation material ($v_{veg} \cdot h$, $\text{m}^3 \text{m}^{-2}$) with the average density of the dry leaf material (ρ_{dry}). Here we use leaf density to remain consistent with the model's assumptions, but it is unknown if the density of leaves, branches, wood, or some weighted average of all three would be more relevant at this stage. We use a value of $\rho_{dry} = 630 \text{ kg m}^{-3}$ reported by Scoffoni et al. (2014) for *quercus agrifolia*.

$$635 \quad \quad \quad AGB = v_{veg} h \rho_{dry} \quad \quad \quad (16)$$

Canopy water content (CWC) is then calculated as follows.

$$m_g = \frac{\text{water weight}}{\text{fresh weight}} = \frac{CWC}{CWC + AGB} \quad (17)$$

$$640 \quad \quad \quad CWC = \frac{AGB m_g}{(1 - m_g)} \quad (18)$$

The resulting time series are shown in Fig. 12a. For AGB, we obtain a mean value of 10.9 kg m^{-2} with very little seasonal variations, as may be expected for an evergreen forest. Note that this estimate should be interpreted with the awareness that VOD-based estimates of AGB likely do not weigh all canopy constituents evenly. While L-band VOD is primarily sensitive to leaves, the sensitivity to branches and trunks can also increase at lower leaf moisture content (Steele-Dunne et al., 2012). Because in situ estimates of AGB are not available at our experimental site, we can only put this value in context with the literature. Several studies have empirically linked VOD observations to global AGB datasets that are based on satellite data and forest inventories (Avitabile et al., 2016). For instance, using the exponential relationship calibrated at L-band by Vittucci et al. (2019), we obtain (for an average VOD value of 0.79 at our site) an AGB of 13.8 kg m^{-2} , not so far from our estimate. Other results from Brandt et al. (2018) suggest a linear relationship between AGB and L-band VOD, with a sensitivity of about 133 Mg ha^{-1} per

unit VOD, which would yield an AGB of 10.5 kg m^{-2} at our site. Thus, existing empirical relationships between VOD and AGB would suggest that the results obtained with the retrieval algorithm and its simple model are reasonable.

a supprimé: but physics-driven

In terms of canopy water content (CWC), which is a function of both m_g and AGB, we find a long-term mean of 12.1 kg m^{-2} at our site. As for AGB, it's important to keep in mind that the CWC estimate does not weigh all canopy constituents evenly. Comparisons with other studies are quite difficult here because the relationship between VOD and vegetation water content is poorly known for forests. Many studies over grasslands and croplands have demonstrated an empirical linear relationship of the form $VOD = b \cdot CWC$. However, b is also known to be vegetation- and time-dependent (Jackson and Schmugge, 1991; Van de Griend and Wigneron, 2004) and it has been argued that such a linear relationship is not necessarily appropriate for forests (Kurum et al., 2012; Le Vine and Karam, 1996). A mean CWC of 12.0 kg m^{-2} is in broad agreement with the few studies which measured forest CWC. Recently, Kurum et al. (2021) reported $7.3 - 25.6 \text{ kg m}^{-2}$ across various plots of a deciduous broadleaf forest in Manitoba (Canada) with mean height of 10.9 m. Yilmaz et al. (2008) estimated CWC values ranging from about 2 to 10 kg m^{-2} for a deciduous forest in Iowa (USA). In the SMAP soil moisture retrieval algorithm, vegetation water content values are estimated from NDVI (Chan et al., 2013). Their resulting (unvalidated) global map suggests a range of 6 to 18 kg m^{-2} for various types of forest biomes.

In Fig. 12b-c, we investigate the temporal consistency (over the whole season) between the retrieved CWC values at our site and satellite observations of the Normalized Difference Water Index (NDWI) from Sentinel 2 (Gao, 1996; Claverie et al., 2018). NDWI is a good proxy for vegetation water content and is based on optical and near-infrared measurements, thus providing fully independent observations with respect to our retrieval. There are 24 days when NDWI observations are available, not flagged for cloud cover, and concurrent with a CWC estimate (Fig. 12b). We find a relatively good agreement between CWC and NDWI ($r = 0.70$), higher than the agreement between observed VOD and NDWI ($r = 0.63$). Interestingly, this agreement is quite dependent on the timing of the in-situ CWC (or VOD) measurement (Fig. 12c). For instance, comparing the 10:30 AM NDWI with the 12:30 PM CWC (or VOD) would yield a substantially lower (and statistically non-significant) correlation of $r = 0.30$ (0.32 for

Commenté [VH1]: An error in the code used to generate the figure caused the NDWI-VOD correlation to use modelled VOD instead of observed VOD for panel c. This has been corrected.

a supprimé: 5

a supprimé: 29

a supprimé: 0

VOD). This time-dependence of the agreement is a good indication that the diurnal cycle of CWC is well
685 captured and that VOD alone is not fully representing its dynamics.

The diurnal dynamics of CWC are particularly strong, with a diurnal amplitude of 3.8 kg m^{-2} on average,
meaning that 28% of the pre-dawn CWC is depleted over the course of the day (Fig. 12d). Such diurnal
variations may seem important for a forested ecosystem but are not entirely inconsistent with other
studies. Over a corn field in the Netherlands, (Vermunt et al., 2022) observed that midday vegetation
690 water content was decreased by 10-20% on average compared to pre-dawn levels and even by 35.4% on
a particularly warm day. The results of Mirfenderesgi et al. (2016), who investigated the transpiration and
sap flow dynamics of oaks in New Jersey with a hydrodynamic model, suggest a diurnal amplitude of
about 15% for just stem water storage. Matheny et al. (2017) also reconstructed a diurnal amplitude of
14.6% to 22.3% of the stem water storage from in situ sap flow measurements of red maple in Michigan.
695 Since our estimate of CWC also likely incorporates an additional contribution from dew (discussed in the
next section), an average CWC amplitude of 28% would not be unexpected.

We find that our retrieval of CWC is slightly lagged compared to the diurnal average VOD cycle (Fig.
12d). This lag is due to the diurnal cycle of temperature and its effect on the dielectric loss (and thus on
700 VOD), as represented in the dielectric model (Fig. 2b). The effect can also be seen in Fig. 10e which
focuses on the month of August. Here a minor peak in VOD can be observed at about 3PM, in the centre
of the midday depression (also see Fig. 8a). Our retrieval suggests that at least some of this peak is in fact
not related to rehydration but to a peak in diurnal temperature. In Fig. 13, we use the transmissivity model
(Eq. 15) to explore the influence of moisture and temperature on modelled VOD (by enforcing a
705 seasonally constant value for temperature and gravimetric moisture respectively). As temperature
increases during the day, it increases the dielectric loss and leads to a higher modelled VOD (Fig 13a),
thus counteracting the effect of moisture content changes to some extent. This effect was particularly
pronounced during the heatwave which struck the area from September 5th to 6th (Fig 13b). Here it can be
seen that there is relatively little response in terms of VOD during the heatwave, with even a minor
710 increase on September 5. Because it is taking the response of the dielectric loss to temperature into
account, the retrieval algorithm needs to compensate the effect of temperature with a marked CWC drop

over that period (e.g. see Fig. 10a), which makes sense from a physiological standpoint. Indeed, the record-breaking heatwave was accompanied by VPD values of up to 8kPa on both days (compared to an average of 1kPa the week before) and it would be very unlikely to see no response of CWC (and VOD) to such a level of stress.

This modelled response of VOD to high temperatures emerges directly from the dielectric model of Ulaby and El-rayes (1987). It is also predicted by another semi-empirical dielectric model of leaves proposed by Matzler (1994), who confirmed such a temperature dependency with seasonal observations made in a beech forest (although they did not control for potential moisture changes as a covariate). It is very important to note that, at L-band, the magnitude as well as the direction of the dielectric loss's dependence on temperature is dependent on the temperature itself (Fig. 2b). For instance, at temperatures between 0 and 20°C the sensitivity of L-band VOD to temperature is negative (Schwank et al., 2021). We note that this temperature dependency can be quite crucial when interpreting water stress from VOD measurements. As water stress conditions often correlate with warm temperatures, one must be careful in interpreting VOD time-series over a large dynamic range of canopy temperatures as VOD alone might lead to unphysical interpretations, in our case an increase of canopy water in the middle of a heat wave.


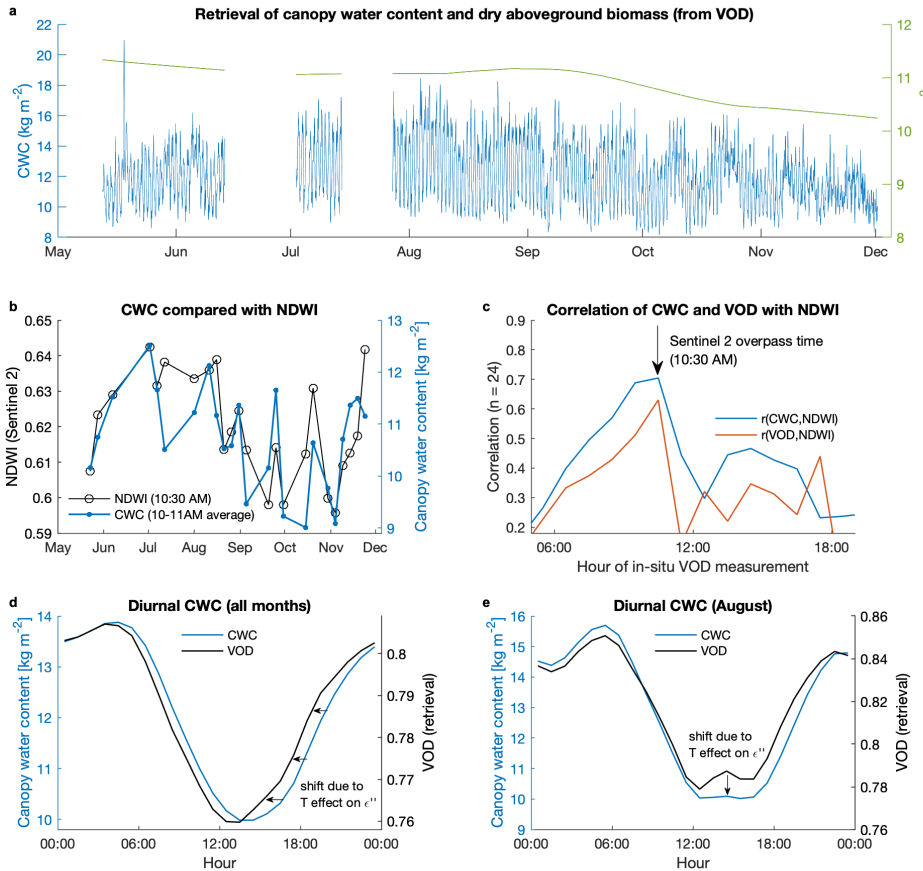


Figure 12. (a) Retrieval of canopy water content (CWC) and dry aboveground biomass (AGB). (b) Comparison between NDWI estimated from Sentinel 2 (HLS v1.4, 30 meter resolution, <https://hls.gsfc.nasa.gov/>) and our retrieval of CWC at the same hour as the Sentinel 2 overpass. (c) Correlation between Sentinel 2 NDWI and CWC / observed VOD at different hours of the day. (d) Long-term average diurnal cycle of CWC and modelled VOD (as predicted in Eq. 15). (e) Same as (d) but for the month of August only.

a supprimé: observed

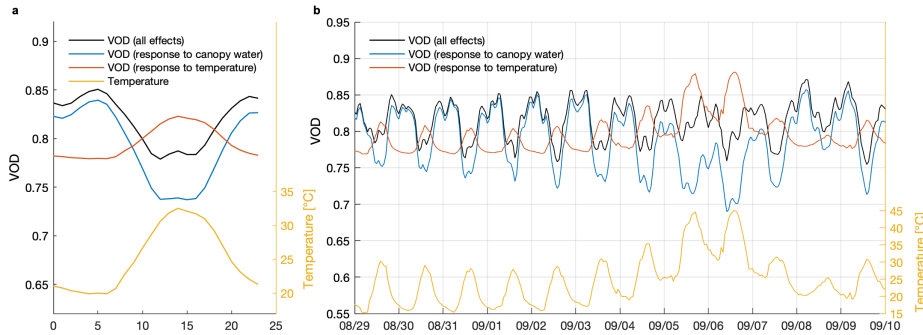


735 **Figure 13. Counteracting effects of leaf gravimetric moisture and temperature on diurnal VOD changes, as predicted by the**
vegetation dielectric model of Ulaby and El-rays (1987). (a) Modelled diurnal VOD response to leaf moisture and temperature,
averaged over the month of August. The VOD response to gravimetric moisture is estimated by setting temperature to its mean
value in the model (and inversely for the response to temperature) (b) Modelled hourly VOD response to moisture and temperature
in the context of the record-breaking heatwave of September 5th to 6th.

5.3 Rainfall interception and dew

740 The only significant rainfall event during the measurement period occurred on May 18th (Fig. 14a). A
 745 cumulated precipitation amount of 10.2 mm was measured on that day which coincided with an increase
 in VOD of about 20% compared to the usual diurnal cycle. Within a few hours following rainfall, this
 excess VOD quickly subsided but did not fully disappear until the day after. We could also establish that
 signal strength was likely not affected by the presence of intercepted water on the antenna itself
 (Supplementary Figure S2). These results indicate that L-band VOD is quite sensitive to intercepted
 rainfall, as could already be inferred from other studies on X-band VOD involving either satellite
 observations (Xu et al., 2021) or in-situ radiometer data (Schneebeli et al., 2011). The VOD anomaly also
 lasted longer compared to the surface wetness measurements taken at the reference station (Fig. 14a).
 This is likely because the surface wetness instrument is exposed to sunlight and an open atmosphere, such
 750 that its surface water evaporates much faster compared to what happens in a forest canopy. If future
 research at eddy-covariance tower sites can demonstrate that such VOD measurements are a good proxy
 for intercepted water, this may provide a useful constraint to the partitioning of evapotranspiration fluxes
 into different sources (i.e. evaporation versus transpiration).

For completeness, we also investigate the effect of dew on our measurements in Fig. 14b-c. Unlike rainfall
755 events, dew events have smaller impacts on VOD and are more difficult to isolate from other sources of
variability. Thus, we focus on the retrieved CWC time series, as it is less influenced by day-to-day
variability in temperature compared to the VOD measurements (as discussed in the previous section). To
diagnose some possible effects of dew on CWC, we separate a two-month observational subset into two
samples based on the daily maximum relative humidity (RH_{\max}). We use a threshold of 70% relative
760 humidity to distinguish nights with and without a potential for dew formation (Ritter et al., 2019). We
then calculate the average diurnal CWC cycles for each of these two subsets (Fig. 14b) and compare their
relative difference against the surface wetness measurements taken at the reference site (Fig. 14c).
Because the surface wetness sensor tends to saturate relatively quickly, we exclude nights where the
wetness sensor is stuck at its maximum value. While this does remove some nights where a lot of dew
765 deposition is occurring, it has the advantage of preserving the proportionality between CWC and the
wetness sensor measurements. We find a relatively good agreement between CWC and the wetness sensor
data (Fig. 14c), suggesting that dew deposition is reflected in our CWC retrieval. This finding is of
importance since dew deposition, even in southern California, would then influence and potentially bias
calculated differences between midnight and mid-day satellite-based VOD, which have been used to
770 interpret plant hydraulic behaviour (Konings and Gentine, 2016). The two-peaked structure in Fig. 14c
seems to be arising from the combination of individual dew accumulation events occurring either after
sunset or before sunrise. It is important to note that because the transmissivity model does not represent
surface water in a dedicated way (Schneebeil et al., 2011), the data in Fig. 14c should not be used to
derive actual dew amounts. Here we can only conclude that L-band VOD is likely influenced by dew
775 deposition, unlike Holtzman et al. (2021) who found no evidence for the impact of dew on VOD
measurements in an oak forest, but in agreement with conclusions from several other studies (Xu et al.,
2021; Schneebeil et al., 2011; Khabbazan et al., 2022).

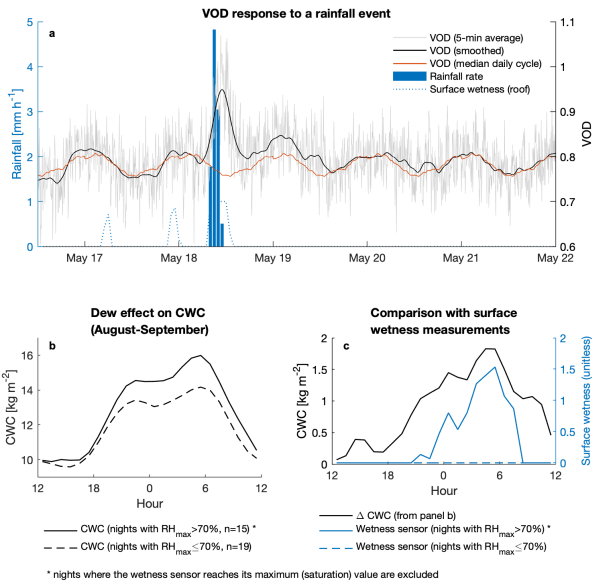

780 **Figure 14. Surface canopy water effects. (a) VOD response to a rainfall event. The 5-minute time series are smoothed with a LOESS filter (± 1.5 hour width). (b) Average diurnal CWC for nights with and without conditions favourable to dew deposition (solid versus dashed line). (c) Difference in CWC based on (b) compared against wetness sensor measurements (taken at the reference site).**

6. Conclusions

In this paper we have demonstrated that a pair of GNSS receivers can be used to continuously measure L-band VOD in a forest stand. Thanks to the diversity of GNSS satellite orbits, a hemispheric scan of the canopy can be obtained, offering the opportunity to individually monitor specific trees, groups of trees, or classes of canopy density. While continuous changes in GNSS orbit patterns and constellation configurations complicate the analysis of raw observations, we provide here a relatively straightforward solution to alleviate this problem and produce credible VOD time series. Pooling observations from the four largest GNSS constellations (GPS, GLONASS, BeiDou, and Galileo), we show that VOD anomalies can be resolved at hourly resolution. In particular, our approach is able to identify a diurnal cycle in VOD which appears consistent with what has been reported in previous recent studies (Holtzman et al.,

2021; Vermunt et al., 2021; Konings et al., 2017b). Here, obtaining such high-frequency (e.g. hourly) VOD time series comes at the cost of angular resolution, since measurements taken at all azimuths and elevation angles are aggregated into hourly averages. Because of the configuration of the GNSS orbits, users face a trade-off between obtaining VOD estimates at high angular resolution (e.g. Figure 5b) versus obtaining VOD time series at high temporal resolution (e.g. Figure 7b).

In a further step, we use existing simple models of canopy microwave transmissivity and vegetation dielectric parameters (Ulaby and Long, 2014) to demonstrate the feasibility of using such GNSS-based VOD observations to derive information on canopy water content and aboveground dry biomass (future

work could certainly explore more complex formulations). Owing to the limited number of ancillary in situ measurements, this retrieval algorithm was not evaluated against long-term ground truth observations and should be seen as a proof-of-concept. Still, the resulting dry aboveground biomass and CWC estimates agree with what has been reported in similar studies. In addition, we show that the CWC estimates are in good agreement with satellite observations of the research site (NDWI from Sentinel 2),

but only if the hourly CWC estimates are taken precisely at the time of the Sentinel-2 overpass. This dependency of the agreement on the observation timing provides convincing and independent evidence that the CWC time series derived from GNSS-based VOD contains valuable information. We also investigate the potential effects of diurnal changes in temperature on the dielectric constant of the vegetation and its impact on L-band VOD and the retrieved CWC. We show that temperature effects on the vegetation dielectric at L-band are predicted to play a minor but non-negligible role and can modulate VOD variability, especially for the case of diurnal variability as well as during extreme events such as heatwaves. Our results suggest that diurnal variability in VOD due to water content could be dampened and in some cases even be reverted by the variability in temperature. This is because temperatures $> 20^{\circ}\text{C}$ cause an increase of the dielectric loss in saline water, causing VOD to increase over the day, in a direction opposite to the expected effect of diurnal canopy dehydration. The magnitude of this temperature effect is dependent on the microwave frequency and the ionic conductivity of the plant water according to the empirical model of Ulaby and El-rays (1987). Finally, we provide some evidence that GNSS-based VOD is sensitive to surface canopy water, for the cases of both rainfall interception and dew deposition.

a supprimé: satellite

Future work may focus on various aspects. Future deployments of GNSS-based measuring systems like the one proposed here will be made at heavily monitored ecohydrological research sites in order to facilitate cross-comparisons with other in situ data. At the time of writing, we have recently equipped three forested FluxNet eddy-covariance sites with pairs of GNSS sensors, one in the U.S. (US-MOz) and two in Switzerland (CH-Lae and CH-Dav). Based on these new deployments, we provide below a few recommendations. The total cost to equip an existing research site was of about 2000 USD, with two thirds of that amount dedicated to acquiring the scientific instruments. The reference instrument may be placed at the top of a flux tower or at some other close location (i.e. < 5 km away) with the clearest possible view of the sky. Positioning the subcanopy antenna is not subject to strong restrictions. **It can even be placed on the ground (without a tripod) as long as it is level and free from obstructions.** We suggest placing the antenna in direct view of frequently monitored trees and not too close to strong reflectors (large tree trunks, buildings). The sampling characteristics discussed in section 3.2 and reported in Fig. 6a may be helpful in guiding new installations. Over flat terrain, the maximum extent of the observation footprint is dependent on the height of the vegetation (minus the subcanopy antenna height). Assuming that measurements with an elevation angle lower than 10° are discarded, the footprint may be roughly estimated as a circle with a radius of $r = h/\tan(10^\circ)$, i.e. $r \approx 57$ m for $h = 10$ m. We provide further recommendations in Supplementary Table S1. Other future objectives **should** include an evaluation of GNSS-based VOD estimates against other VOD measurements made by a tower-mounted radar or radiometer. **In particular, the degree to which GNSS-VOD at RHCP-polarization agrees with other VOD estimates at horizontal (H) or vertical (V) polarization is unknown. For instance, previous studies over forests have shown that H-pol VOD can differ from V-pol VOD, even though temporal dynamics are similar** (Schwank et al., 2021; Guglielmetti et al., 2008; Kurum et al., 2009b). Even though our observations do not suggest it, we cannot yet exclude the possibility that GNSS-based VOD has some type of bias compared to these other types of **measurements** (which do not constitute a reference per se). The question of how to best process the GNSS data in order to obtain VOD time series also remains to be explored. The initial solution provided in Section 3.3 may likely be refined to further reduce some of the noise still present in sub-hourly GNSS-based VOD time series. Some additional information may also be gained by using GNSS signals at multiple frequencies (we used here the most common signal, which is

a supprimé: to

a supprimé: c

a supprimé: potential

a supprimé: may

a supprimé: instruments

emitted at around 1.57 GHz, but individual constellations also broadcast signals at lower frequencies, up
855 to 1.17 GHz).

The results presented here suggest that GNSS-based VOD may have the potential to fill a key research
gap in terms of linking satellite-based L-band VOD observations to ground observations. This
contribution could take place in several ways. For example, arrays of GNSS receivers deployed within
860 the spatial footprint of a satellite VOD grid cell (i.e. about 30 km) may serve to estimate a regional average
VOD that would be suitable as ground truth for the satellite products. In addition, long-term in-situ VOD
observations performed at existing ecohydrological research sites may serve to develop and evaluate
retrieval algorithms that aim to transform VOD into other relevant quantities of interest like aboveground
biomass, canopy water content, or leaf water potential. To the benefit of these research sites, GNSS-based
865 VOD provides a useful proxy to upscale and gap-fill time series of the time-consuming and labour-
intensive measurements of leaf water status and biomass. The ability to detect rainfall interception and
dew deposition at the scale of a whole canopy may also provide some key information to improve our
understanding of water, energy, and carbon fluxes at these sites. While GNSS-based monitoring of the
Earth system remains a relatively diverse and emerging research field, remote sensing of GNSS-based
870 VOD appears as a particularly promising application, because of its ability to address a series of research
objectives at a modest cost.

Code and data availability

Raw and processed GNSS data files are freely available upon request. Weather data is publicly available
at <http://tccon-weather.caltech.edu/> and <https://dpw.lacounty.gov/wrd/rainfall/>. Harmonized Sentinel-2
875 data is publicly available at <https://hls.gsfc.nasa.gov/>. The tecq software is publicly available at
<https://www.unavco.org/software/data-processing/teqc/teqc.html>.

Competing interests

The authors declare that they have no conflict of interest.

Author contributions

880 V.H. developed the concept, conducted the measurements, and the analysis. Both authors contributed to the methodology, visualizations, and writing.

Acknowledgments

V.H. acknowledges support from the Swiss National Science Foundation (grants no. P400P2_180784 and P4P4P2_194464). We thank Brian Dorsey from the Huntington Library, Art Museum, and Botanical
885 Gardens in San Marino, Los Angeles County for providing us with access to the gardens, participating in the measurements, and coordinating technical support for the research site. We thank Ken Hudnut, Evelyn Roeloffs, and Aris G. Aspiotes from the United States Geological Survey for lending us the equipment needed to conduct preliminary investigations. We thank Kristine Larson from the University of Colorado for providing us with initial recommendations on the overall set-up.

890 References

- Avitabile, V., Herold, M., Heuvelink, G. B. M., Lewis, S. L., Phillips, O. L., Asner, G. P., Armston, J., Ashton, P. S., Banin, L., Bayol, N., Berry, N. J., Boeckx, P., Jong, B. H. J., DeVries, B., Girardin, C. A. J., Kearsley, E., Lindsell, J. A., Lopez-Gonzalez, G., Lucas, R., Malhi, Y., Morel, A., Mitchard, E. T. A., Nagy, L., Qie, L., Quinones, M. J., Ryan, C. M., Ferry, S. J. W., Sunderland, T., Laurin, G. V., Gatti, R. C., Valentini, R., Verbeeck, H., Wijaya, A., and Willcock, S.: An integrated pan-tropical biomass map using multiple reference datasets, *Global Change Biology*, 22, 1406-1420, 10.1111/gcb.13139, 2016.
- 895 Bilich, A., Axelrad, P., and Larson, K. M.: Scientific Utility of the Signal-to-Noise Ratio (SNR) Reported by Geodetic GPS Receivers, Proceedings of the 20th International Technical Meeting of the Satellite Division of The Institute of Navigation (ION GNSS 2007), 1999-2010, 2007.
- 900 Brandt, M., Wigneron, J.-P., Chave, J., Tagesson, T., Penuelas, J., Ciais, P., Rasmussen, K., Tian, F., Mbow, C., Al-Yaari, A., Rodriguez-Fernandez, N., Schurgers, G., Zhang, W., Chang, J., Kerr, Y., Verger, A., Tucker, C., Mialon, A., Rasmussen, L. V., Fan, L., and Fensholt, R.: Satellite passive microwaves reveal recent climate-induced carbon losses in African drylands, *Nature Ecology & Evolution*, 2, 827-835, 10.1038/s41559-018-0530-6, 2018.
- Camps, A., Alonso-Arroyo, A., Park, H., Onrubia, R., Pascual, D., and Querol, J.: L-Band Vegetation Optical Depth Estimation Using Transmitted GNSS Signals: Application to GNSS-Reflectometry and Positioning, *Remote Sensing*, 12, 10.3390/rs12152352, 2020.
- 905 Carreno-Luengo, H., Luzzi, G., and Crosetto, M.: Above-Ground Biomass Retrieval over Tropical Forests: A Novel GNSS-R Approach with CyGNSS, *Remote Sensing*, 12, 10.3390/rs12091368, 2020.
- Cermak, J., Kucera, J., Bauerle, W. L., Phillips, N., and Hinckley, T. M.: Tree water storage and its diurnal dynamics related to sap flow and changes in stem volume in old-growth Douglas-fir trees, *Tree Physiology*, 27, 181-198, 10.1093/treephys/27.2.181, 2007.
- 910 Chan, S., Bindlish, R., Hunt, R., Jackson, T., and Kimball, J.: Ancillary Data Report Vegetation Water Content, in: SMAP Science Document no. 047, Jet Propulsion Laboratory, California Institute of Technology, 2013.
- Chaubell, M. J., Yueh, S. H., Dunbar, R. S., Colliander, A., Chen, F., Chan, S. K., Entekhabi, D., Bindlish, R., O'Neill, P. E., Asanuma, J., Berg, A. A., Bosch, D. D., Caldwell, T., Cosh, M. H., Holfield Collins, C., Martinez-Fernandez, J., Seyfried, M., Starks, P. J., Su, Z., Thibeault, M., and Walker, J.: Improved SMAP Dual-Channel Algorithm for the Retrieval of Soil Moisture, *Ieee T Geosci Remote*, 58, 3894-3905, 10.1109/tgrs.2019.2959239, 2020.
- 915 Chew, C. C., Small, E. E., Larson, K. M., and Zavorotny, V. U.: Effects of Near-Surface Soil Moisture on GPS SNR Data: Development of a Retrieval Algorithm for Soil Moisture, *Ieee T Geosci Remote*, 52, 537-543, 10.1109/tgrs.2013.2242332, 2014.
- Chew, C. C., and Small, E. E.: Soil Moisture Sensing Using Spaceborne GNSS Reflections: Comparison of CYGNSS Reflectivity to SMAP Soil Moisture, *Geophysical Research Letters*, 45, 4049-4057, 10.1029/2018gl077905, 2018.

- 920 Chuah, H. T., Lee, K. Y., and Lau, T. W.: Dielectric constants of rubber and oil palm leaf samples at X-band, *Ieee T Geosci Remote*, 33, 221-223, 10.1109/36.368205, 1995.
- Claverie, M., Ju, J., Masek, J. G., Dungan, J. L., Vermote, E. F., Roger, J.-C., Skakun, S. V., and Justice, C.: The Harmonized Landsat and Sentinel-2 surface reflectance data set, *Remote Sensing of Environment*, 219, 145-161, 10.1016/j.rse.2018.09.002, 2018.
- Egido, A., Paloscia, S., Motte, E., Guerriero, L., Pierdicca, N., Caparrini, M., Santi, E., Fontanelli, G., and Floury, N.: Airborne GNSS-R Polarimetric Measurements for Soil Moisture and Above-Ground Biomass Estimation, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 7, 1522-1532, 10.1109/jstars.2014.2322854, 2014.
- 925 Fan, L., Wigneron, J.-P., Ciais, P., Chave, J., Brandt, M., Fensholt, R., Saatchi, S. S., Bastos, A., Al-Yaari, A., Hufkens, K., Qin, Y., Xiao, X., Chen, C., Myneni, R. B., Fernandez-Moran, R., Mialon, A., Rodriguez-Fernandez, N. J., Kerr, Y., Tian, F., and Peñuelas, J.: Satellite-observed pantropical carbon dynamics, *Nature Plants*, 5, 944-951, 10.1038/s41477-019-0478-9, 2019.
- Faria, T., Garcia-Plazaola, J. I., Abadia, A., Cerasoli, S., Pereira, J. S., and Chaves, M. M.: Diurnal changes in photoprotective mechanisms in leaves of cork oak (*Quercus suber*) during summer, *Tree Physiology*, 16, 115-123, 10.1093/treephys/16.1-2.115, 1996.
- 930 Feldman, A. F., Short Gianotti, D. J., Konings, A. G., Gentine, P., and Entekhabi, D.: Patterns of plant rehydration and growth following pulses of soil moisture availability, *Biogeosciences*, 18, 831-847, 10.5194/bg-18-831-2021, 2021.
- Frappart, F., Wigneron, J.-P., Li, X., Liu, X., Al-Yaari, A., Fan, L., Wang, M., Moisy, C., Le Masson, E., Aoulad Lafkih, Z., Vallé, C., Ygorra, B., and Baghdadi, N.: Global Monitoring of the Vegetation Dynamics from the Vegetation Optical Depth (VOD): A Review, *Remote Sensing*, 12, 10.3390/rs12182915, 2020.
- 935 Gao, B.-c.: NDWI—A normalized difference water index for remote sensing of vegetation liquid water from space, *Remote Sensing of Environment*, 58, 257-266, 10.1016/s0034-4257(96)00067-3, 1996.
- Grant, J. P., Wigneron, J. P., De Jeu, R. A. M., Lawrence, H., Mialon, A., Richaume, P., Al Bitar, A., Drusch, M., van Marle, M. J. E., and Kerr, Y.: Comparison of SMOS and AMSR-E vegetation optical depth to four MODIS-based vegetation indices, *Remote Sensing of Environment*, 172, 87-100, 10.1016/j.rse.2015.10.021, 2016.
- 940 Grossiord, C., Buckley, T. N., Cernusak, L. A., Novick, K. A., Poulter, B., Siegwolf, R. T. W., Sperry, J. S., and McDowell, N. G.: Plant responses to rising vapor pressure deficit, *New Phytologist*, 226, 1550-1566, 10.1111/nph.16485, 2020.
- Guerriero, L., Martin, F., Mollfulleda, A., Paloscia, S., Pierdicca, N., Santi, E., and Floury, N.: Ground-Based Remote Sensing of Forests Exploiting GNSS Signals, *Ieee T Geosci Remote*, 58, 6844-6860, 10.1109/tgrs.2020.2976899, 2020.
- 945 Guglielmetti, M., Schwank, M., Mätzler, C., Oberdorster, C., Vanderborght, J., and Flühler, H.: Measured microwave radiative transfer properties of a deciduous forest canopy, *Remote Sensing of Environment*, 109, 523-532, 10.1016/j.rse.2007.02.003, 2007.
- Guglielmetti, M., Schwank, M., Matzler, C., Oberdorster, C., Vanderborght, J., and Flühler, H.: FOSMEX: Forest Soil Moisture Experiments With Microwave Radiometry, *Ieee T Geosci Remote*, 46, 727-735, 10.1109/tgrs.2007.914797, 2008.
- 950 Holtzman, N. M., Anderegg, L. D. L., Kraatz, S., Mavrovic, A., Sonntag, O., Pappas, C., Cosh, M. H., Langlois, A., Lakhankar, T., Tesser, D., Steiner, N., Colliander, A., Roy, A., and Konings, A. G.: L-band vegetation optical depth as an indicator of plant water potential in a temperate deciduous forest stand, *Biogeosciences*, 18, 739-753, 10.5194/bg-18-739-2021, 2021.
- Jackson, T. J., Schmugge, T. J., and Wang, J. R.: Passive microwave sensing of soil moisture under vegetation canopies, *Water Resources Research*, 18, 1137-1142, 10.1029/WR018i004p01137, 1982.
- 955 Jackson, T. J., and Schmugge, T. J.: Vegetation effects on the microwave emission of soils, *Remote Sensing of Environment*, 36, 203-212, 10.1016/0034-4257(91)90057-d, 1991.
- Kamakura, M., Kosugi, Y., Takanashi, S., Matsumoto, K., Okumura, M., and Philip, E.: Patchy stomatal behavior during midday depression of leaf CO₂ exchange in tropical trees, *Tree Physiology*, 31, 160-168, 10.1093/treephys/tpq102, 2011.
- Kerr, Y. H., and Wigneron, J. P.: Vegetation models and observations A review, in: *Passive Microwave Remote Sensing of Land-Atmosphere Interactions*, 317-344, 1995.
- 960 Khabbazan, S., Steele-Dunne, S. C., Vermunt, P., Judge, J., Vreugdenhil, M., and Gao, G.: The influence of surface canopy water on the relationship between L-band backscatter and biophysical variables in agricultural monitoring, *Remote Sensing of Environment*, 268, 10.1016/j.rse.2021.112789, 2022.
- Kocher, P., Horna, V., and Leuschner, C.: Stem water storage in five coexisting temperate broad-leaved tree species: significance, temporal dynamics and dependence on tree functional traits, *Tree Physiology*, 33, 817-832, 10.1093/treephys/tpt055, 2013.
- 965 Konings, A. G., and Gentine, P.: Global variations in ecosystem-scale isohydrlicity, *Global Change Biology*, 23, 891-905, 10.1111/gcb.13389, 2016.
- Konings, A. G., Piles, M., Rötzer, K., McColl, K. A., Chan, S. K., and Entekhabi, D.: Vegetation optical depth and scattering albedo retrieval using time series of dual-polarized L-band radiometer observations, *Remote Sensing of Environment*, 172, 178-189, 10.1016/j.rse.2015.11.009, 2016.
- 970 Konings, A. G., Piles, M., Das, N., and Entekhabi, D.: L-band vegetation optical depth and effective scattering albedo estimation from SMAP, *Remote Sensing of Environment*, 198, 460-470, 10.1016/j.rse.2017.06.037, 2017a.
- Konings, A. G., Yu, Y., Xu, L., Yang, Y., Schimel, D. S., and Saatchi, S. S.: Active microwave observations of diurnal and seasonal variations of canopy water content across the humid African tropical forests, *Geophysical Research Letters*, 44, 2290-2299, 10.1002/2016gl072388, 2017b.

- 975 Konings, A. G., Rao, K., and Steele-Dunne, S. C.: Macro to micro: microwave remote sensing of plant water content for physiology and ecology, *New Phytologist*, 223, 1166-1172, 10.1111/nph.15808, 2019.
- Konings, A. G., Saatchi, S. S., Frankenberger, C., Keller, M., Leshyk, V., Anderegg, W. R. L., Humphrey, V., Matheny, A. M., Trugman, A., Sack, L., Agee, E., Barnes, M. L., Binks, O., Cawse-Nicholson, K., Christoffersen, B. O., Entekhabi, D., Gentile, P., Holtzman, N. M., Katul, G. G., Liu, Y., Longo, M., Martinez-Vilalta, J., McDowell, N., Meir, P., Mencuccini, M., Mrad, A., Novick, K. A., Oliveira, R. S., Siqueira, P., Steele-Dunne, S. C., Thompson, D. R., Wang, Y., Wehr, R., Wood, J. D., Xu, X., and Zuidema, P. A.: Detecting forest response to droughts with global observations of vegetation water content, *Global Change Biology*, 27, 6005-6024, 10.1111/gcb.15872, 2021.
- 980 Kurum, M., Lang, R. H., O'Neill, P. E., Joseph, A. T., Jackson, T. J., and Cosh, M. H.: L-Band Radar Estimation of Forest Attenuation for Active/Passive Soil Moisture Inversion, *Ieee T Geosci Remote*, 47, 3026-3040, 10.1109/tgrs.2009.2026641, 2009a.
- 985 Kurum, M., Lang, R. H., Utku, C., and O'Neill, P. E.: A physical model for microwave radiometry of forest canopies, 2009 IEEE International Geoscience and Remote Sensing Symposium, 2009b.
- Kurum, M., O'Neill, P. E., Lang, R. H., Joseph, A. T., Cosh, M. H., and Jackson, T. J.: Effective tree scattering and opacity at L-band, *Remote Sensing of Environment*, 118, 1-9, 10.1016/j.rse.2011.10.024, 2012.
- 990 Kurum, M., and Farhad, M. M.: UGV-Based Mapping of Forest Transmissivity Using GPS Measurements, 2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS, 2021.
- Kurum, M., Kim, S.-B., Akbar, R., and Cosh, M. H.: Surface Soil Moisture Retrievals Under Forest Canopy for SLS-Band SAR Observations Across a Wide Range of Incidence Angles by Inverting a Physical Scattering Model, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 14, 1741-1753, 10.1109/jstars.2020.3047883, 2021.
- 995 Larson, K. M., Gutmann, E. D., Zavorotny, V. U., Braun, J. J., Williams, M. W., and Nievinski, F. G.: Can we measure snow depth with GPS receivers?, *Geophysical Research Letters*, 36, 10.1029/2009gl039430, 2009.
- Larson, K. M.: GPS interferometric reflectometry: applications to surface soil moisture, snow depth, and vegetation water content in the western United States, *Wiley Interdisciplinary Reviews: Water*, 3, 775-787, 10.1002/wat2.1167, 2016.
- Le Vine, D. M., and Karam, M. A.: Dependence of attenuation in a vegetation canopy on frequency and plant water content, *Ieee T Geosci Remote*, 34, 1090-1096, 10.1109/36.536525, 1996.
- 000 Lee, J.-E., Frankenberger, C., van der Tol, C., Berry, J. A., Guanter, L., Boyce, C. K., Fisher, J. B., Morrow, E., Worden, J. R., Asefi, S., Badgley, G., and Saatchi, S.: Forest productivity and water stress in Amazonia: observations from GOSAT chlorophyll fluorescence, *Proceedings of the Royal Society B: Biological Sciences*, 280, 10.1098/rspb.2013.0171, 2013.
- Li, X., Wigneron, J.-P., Frappart, F., Fan, L., Ciais, P., Fensholt, R., Entekhabi, D., Brandt, M., Konings, A. G., Liu, X., Wang, M., Al-Yaari, A., and Moisy, C.: Global-scale assessment and inter-comparison of recently developed/reprocessed microwave satellite vegetation optical depth products, *Remote Sensing of Environment*, 253, 10.1016/j.rse.2020.112208, 2021.
- 005 Liu, H. Q., and Huete, A.: A feedback based modification of the NDVI to minimize canopy background and atmospheric noise, *Ieee T Geosci Remote*, 33, 457-465, 10.1109/tgrs.1995.8746027, 1995.
- Martínez-Vilalta, J., Poyatos, R., Aguadé, D., Retana, J., and Mencuccini, M.: A new look at water transport regulation in plants, *New Phytologist*, 204, 105-115, 10.1111/nph.12912, 2014.
- 010 Matheny, A. M., Garrity, S. R., and Bohrer, G.: The Calibration and Use of Capacitance Sensors to Monitor Stem Water Content in Trees, *Journal of Visualized Experiments*, 10.3791/57062, 2017.
- Matzler, C.: Microwave (1-100 GHz) dielectric model of leaves, *Ieee T Geosci Remote*, 32, 947-949, 10.1109/36.298024, 1994.
- Matzler, C.: Microwave transmissivity of a forest canopy: Experiments made with a beech, *Remote Sensing of Environment*, 48, 172-180, 10.1016/0034-4257(94)90139-2, 1994.
- 015 Mirfenderesgi, G., Bohrer, G., Matheny, A. M., Faticchi, S., de Moraes Frasson, R. P., and Schäfer, K. V. R.: Tree level hydrodynamic approach for resolving aboveground water storage and stomatal conductance and modeling the effects of tree hydraulic strategy, *Journal of Geophysical Research: Biogeosciences*, 121, 1792-1813, 10.1002/2016jg003467, 2016.
- Moesinger, L., Dorigo, W., de Jeu, R., van der Schalie, R., Scanlon, T., Teubner, I., and Forkel, M.: The global long-term microwave Vegetation Optical Depth Climate Archive (VODCA), *Earth Syst Sci Data*, 12, 177-196, 10.5194/essd-12-177-2020, 2020.
- 020 Momen, M., Wood, J. D., Novick, K. A., Pangle, R., Pockman, W. T., McDowell, N. G., and Konings, A. G.: Interacting Effects of Leaf Water Potential and Biomass on Vegetation Optical Depth, *Journal of Geophysical Research: Biogeosciences*, 122, 3031-3046, 10.1002/2017jg004145, 2017.
- Mullan, D., and Pietragalla, J.: Chapter 5. Leaf relative water content, in: *Physiological breeding II: a field guide to wheat phenotyping*, edited by: Pask, A., Pietragalla, J., Mullan, D., and Reynolds, M. P., CIMMYT, Mexico, 132, 2012.
- 025 Munoz-Martin, J. F., Pascual, D., Onrubia, R., Park, H., Camps, A., Rudiger, C., Walker, J. P., and Monerris, A.: Vegetation Canopy Height Retrieval Using L1 and L5 Airborne GNSS-R, *IEEE Geoscience and Remote Sensing Letters*, 19, 1-5, 10.1109/lgrs.2021.3131263, 2022.
- Owe, M., de Jeu, R., and Holmes, T.: Multisensor historical climatology of satellite-derived global land surface moisture, *Journal of Geophysical Research*, 113, 10.1029/2007jf000769, 2008.

- 030 Paloscia, S., and Pampaloni, P.: Microwave vegetation indexes for detecting biomass and water conditions of agricultural crops, *Remote Sensing of Environment*, 40, 15-26, 10.1016/0034-4257(92)90123-2, 1992.
- Pan, Y., Ren, C., Liang, Y., Zhang, Z., and Shi, Y.: Inversion of surface vegetation water content based on GNSS-IR and MODIS data fusion, *Satellite Navigation*, 1, 10.1186/s43020-020-00021-z, 2020.
- 035 Prigent, C., Jimenez, C., Dinh, L. A., Frappart, F., Gentine, P., Wigneron, J. P., and Munchak, J.: Diurnal and Seasonal Variations of Passive and Active Microwave Satellite Observations Over Tropical Forests, *Journal of Geophysical Research: Biogeosciences*, 127, 10.1029/2021jg006677, 2022.
- Ritter, F., Berkelhammer, M., and Beysens, D.: Dew frequency across the US from a network of in situ radiometers, *Hydrology and Earth System Sciences*, 23, 1179-1197, 10.5194/hess-23-1179-2019, 2019.
- 040 Rodriguez-Alvarez, N., Bosch-Lluis, X., Camps, A., Ramos-Perez, I., Valencia, E., Park, H., and Vall-llossera, M.: Vegetation Water Content Estimation Using GNSS Measurements, *IEEE Geoscience and Remote Sensing Letters*, 9, 282-286, 10.1109/lgrs.2011.2166242, 2012.
- Rodriguez-Fernández, N. J., Mialon, A., Mermoz, S., Bouvet, A., Richaume, P., Al Bitar, A., Al-Yaari, A., Brandt, M., Kaminski, T., Le Toan, T., Kerr, Y. H., and Wigneron, J.-P.: An evaluation of SMOS L-band vegetation optical depth (L-VOD) data sets: high sensitivity of L-VOD to above-ground biomass in Africa, *Biogeosciences*, 15, 4627-4645, 10.5194/bg-15-4627-2018, 2018.
- 045 Ruf, C. S., Chew, C., Lang, T., Morris, M. G., Nave, K., Ridley, A., and Balasubramaniam, R.: A New Paradigm in Earth Environmental Monitoring with the CYGNSS Small Satellite Constellation, *Sci Rep-Uk*, 8, 10.1038/s41598-018-27127-4, 2018.
- Santi, E., Paloscia, S., Pettinato, S., Fontanelli, G., Guerriero, L., Pierdicca, N., Clarizia, M.-P., Notarnicola, C., Pierdicca, N., Bovenga, F., and Santi, E.: Global monitoring of forest biomass using GNSS reflectometry (Conference Presentation), *Active and Passive Microwave Remote Sensing for Environmental Monitoring III*, 2019.
- 050 Schmugge, T. J., and Jackson, T. J.: A dielectric model of the vegetation effects on the microwave emission from soils, *Ieee T Geosci Remote*, 30, 757-760, 10.1109/36.158870, 1992.
- Schneebeil, M., Wolf, S., Kunert, N., Eugster, W., and Mätzler, C.: Relating the X-band opacity of a tropical tree canopy to sapflow, rain interception and dew formation, *Remote Sensing of Environment*, 115, 2116-2125, 10.1016/j.rse.2011.04.016, 2011.
- 055 Schwank, M., Kontu, A., Mialon, A., Naderpour, R., Houtz, D., Lemmetyinen, J., Rautiainen, K., Li, Q., Richaume, P., Kerr, Y., and Mätzler, C.: Temperature effects on L-band vegetation optical depth of a boreal forest, *Remote Sensing of Environment*, 263, 10.1016/j.rse.2021.112542, 2021.
- Scoffoni, C., Vuong, C., Diep, S., Cochard, H., and Sack, L.: Leaf Shrinkage with Dehydration: Coordination with Hydraulic Vulnerability and Drought Tolerance, *Plant Physiology*, 164, 1772-1788, 10.1104/pp.113.221424, 2014.
- 060 Small, E. E., Larson, K. M., and Braun, J. J.: Sensing vegetation growth with reflected GPS signals, *Geophysical Research Letters*, 37, n/a-n/a, 10.1029/2010gl042951, 2010.
- Smyrniotis, M., Schn, S., and Liso, M.: Multipath Propagation, Characterization and Modeling in GNSS, in: *Geodetic Sciences - Observations, Modeling and Applications*, 2013.
- Steele-Dunne, S. C., Friesen, J., and van de Giesen, N.: Using Diurnal Variation in Backscatter to Detect Vegetation Water Stress, *Ieee T Geosci Remote*, 50, 2618-2629, 10.1109/tgrs.2012.2194156, 2012.
- 065 Tian, F., Brandt, M., Liu, Y. Y., Verger, A., Tagesson, T., Diouf, A. A., Rasmussen, K., Mbow, C., Wang, Y., and Fensholt, R.: Remote sensing of vegetation dynamics in drylands: Evaluating vegetation optical depth (VOD) using AVHRR NDVI and in situ green biomass data over West African Sahel, *Remote Sensing of Environment*, 177, 265-276, 10.1016/j.rse.2016.02.056, 2016.
- Tian, F., Wigneron, J.-P., Ciaï, P., Chave, J., Ogée, J., Peñuelas, J., Ræbild, A., Domec, J.-C., Tong, X., Brandt, M., Mialon, A., Rodriguez-Fernandez, N., Tagesson, T., Al-Yaari, A., Kerr, Y., Chen, C., Myneni, R. B., Zhang, W., Ardö, J., and Fensholt, R.: Coupling of ecosystem-scale plant water storage and leaf phenology observed by satellite, *Nature Ecology & Evolution*, 2, 1428-1435, 10.1038/s41559-018-0630-3, 2018.
- 070 Ulaby, F., and El-rayes, M.: Microwave Dielectric Spectrum of Vegetation - Part II: Dual-Dispersion Model, *Ieee T Geosci Remote*, GE-25, 550-557, 10.1109/tgrs.1987.289833, 1987.
- 075 Ulaby, F. T., and Jedlicka, R. P.: Microwave Dielectric Properties of Plant Materials, *Ieee T Geosci Remote*, GE-22, 406-415, 10.1109/tgrs.1984.350644, 1984.
- Ulaby, F. T., and Long, D. G.: *Microwave radar and radiometric remote sensing*, The University of Michigan Press, Ann Arbor, 984 pp., 2014.
- Van de Griend, A. A., and Wigneron, J. P.: The b-factor as a function of frequency and canopy type at H-polarization, *Ieee T Geosci Remote*, 42, 786-794, 10.1109/tgrs.2003.821889, 2004.
- 080 Vermunt, P. C., Khabbazan, S., Steele-Dunne, S. C., Judge, J., Monsivais-Huerta, A., Guerriero, L., and Liu, P.-W.: Response of Subdaily L-Band Backscatter to Internal and Surface Canopy Water Dynamics, *Ieee T Geosci Remote*, 59, 7322-7337, 10.1109/tgrs.2020.3035881, 2021.
- Vermunt, P. C., Steele-Dunne, S. C., Khabbazan, S., Judge, J., and van de Giesen, N. C.: Extrapolating continuous vegetation water content to understand sub-daily backscatter variations, *Hydrology and Earth System Sciences*, 26, 1223-1241, 10.5194/hess-26-1223-2022, 2022.
- 085

- Vittucci, C., Vaglio Laurin, G., Tramontana, G., Ferrazzoli, P., Guerriero, L., and Papale, D.: Vegetation optical depth at L-band and above ground biomass in the tropical range: Evaluating their relationships at continental and regional scales, *International Journal of Applied Earth Observation and Geoinformation*, 77, 151-161, 10.1016/j.jag.2019.01.006, 2019.
- 090 Wang, X., Dannenberg, M. P., Yan, D., Jones, M. O., Kimball, J. S., Moore, D. J. P., Leeuwen, W. J. D., Didan, K., and Smith, W. K.: Globally Consistent Patterns of Asynchrony in Vegetation Phenology Derived From Optical, Microwave, and Fluorescence Satellite Data, *Journal of Geophysical Research: Biogeosciences*, 125, 10.1029/2020jg005732, 2020.
- Wigneron, J.-P., Fan, L., Ciais, P., Bastos, A., Brandt, M., Chave, J., Saatchi, S., Baccini, A., and Fensholt, R.: Tropical forests did not recover from the strong 2015–2016 El Niño event, *Science Advances*, 6, 10.1126/sciadv.aay4603, 2020.
- 095 Xiao, J., Fisher, J. B., Hashimoto, H., Ichii, K., and Parazoo, N. C.: Emerging satellite observations for diurnal cycling of ecosystem processes, *Nature Plants*, 7, 877-887, 10.1038/s41477-021-00952-8, 2021.
- Xu, X., Konings, A. G., Longo, M., Feldman, A., Xu, L., Saatchi, S., Wu, D., Wu, J., and Moorcroft, P.: Leaf surface water, not plant water stress, drives diurnal variation in tropical forest canopy water content, *New Phytologist*, 231, 122-136, 10.1111/nph.17254, 2021.
- Yilmaz, M. T., Hunt, E. R., and Jackson, T. J.: Remote sensing of vegetation water content from equivalent water thickness using satellite imagery, *Remote Sensing of Environment*, 112, 2514-2522, 10.1016/j.rse.2007.11.014, 2008.
- 100 Zhou, H., Sun, Y., Shan, G., Grantz, D. A., Cheng, Q., Schulze Lammers, P., Damerow, L., Wen, B., Xue, X., and Chen, B.: In situ measurement of stem water content and diurnal storage of an apricot tree with a high frequency inner fringing dielectric sensor, *Agr Forest Meteorol.*, 250-251, 35-46, 10.1016/j.agrformet.2017.12.002, 2018.
- Zribi, M., Motte, E., Fanise, P., and Zouaoui, W.: Low-Cost GPS Receivers for the Monitoring of Sunflower Cover Dynamics, *Journal of Sensors*, 2017, 1-9, 10.1155/2017/6941739, 2017.

105